



ALPHABET

</scripting_light>

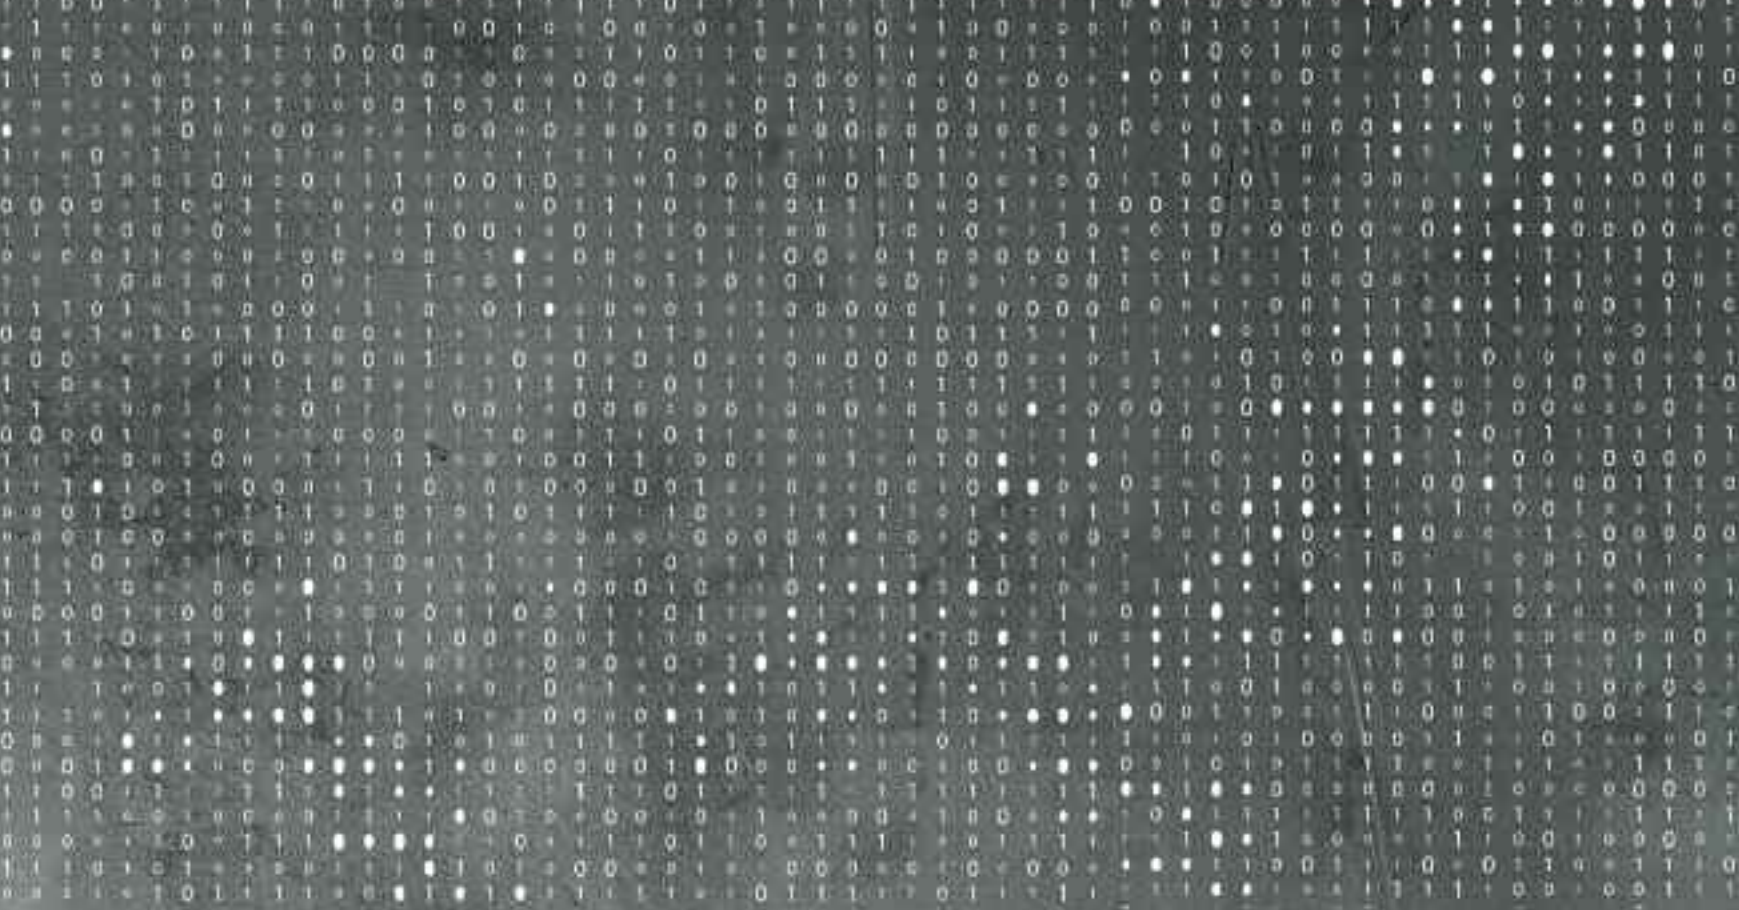

Change... the way you see

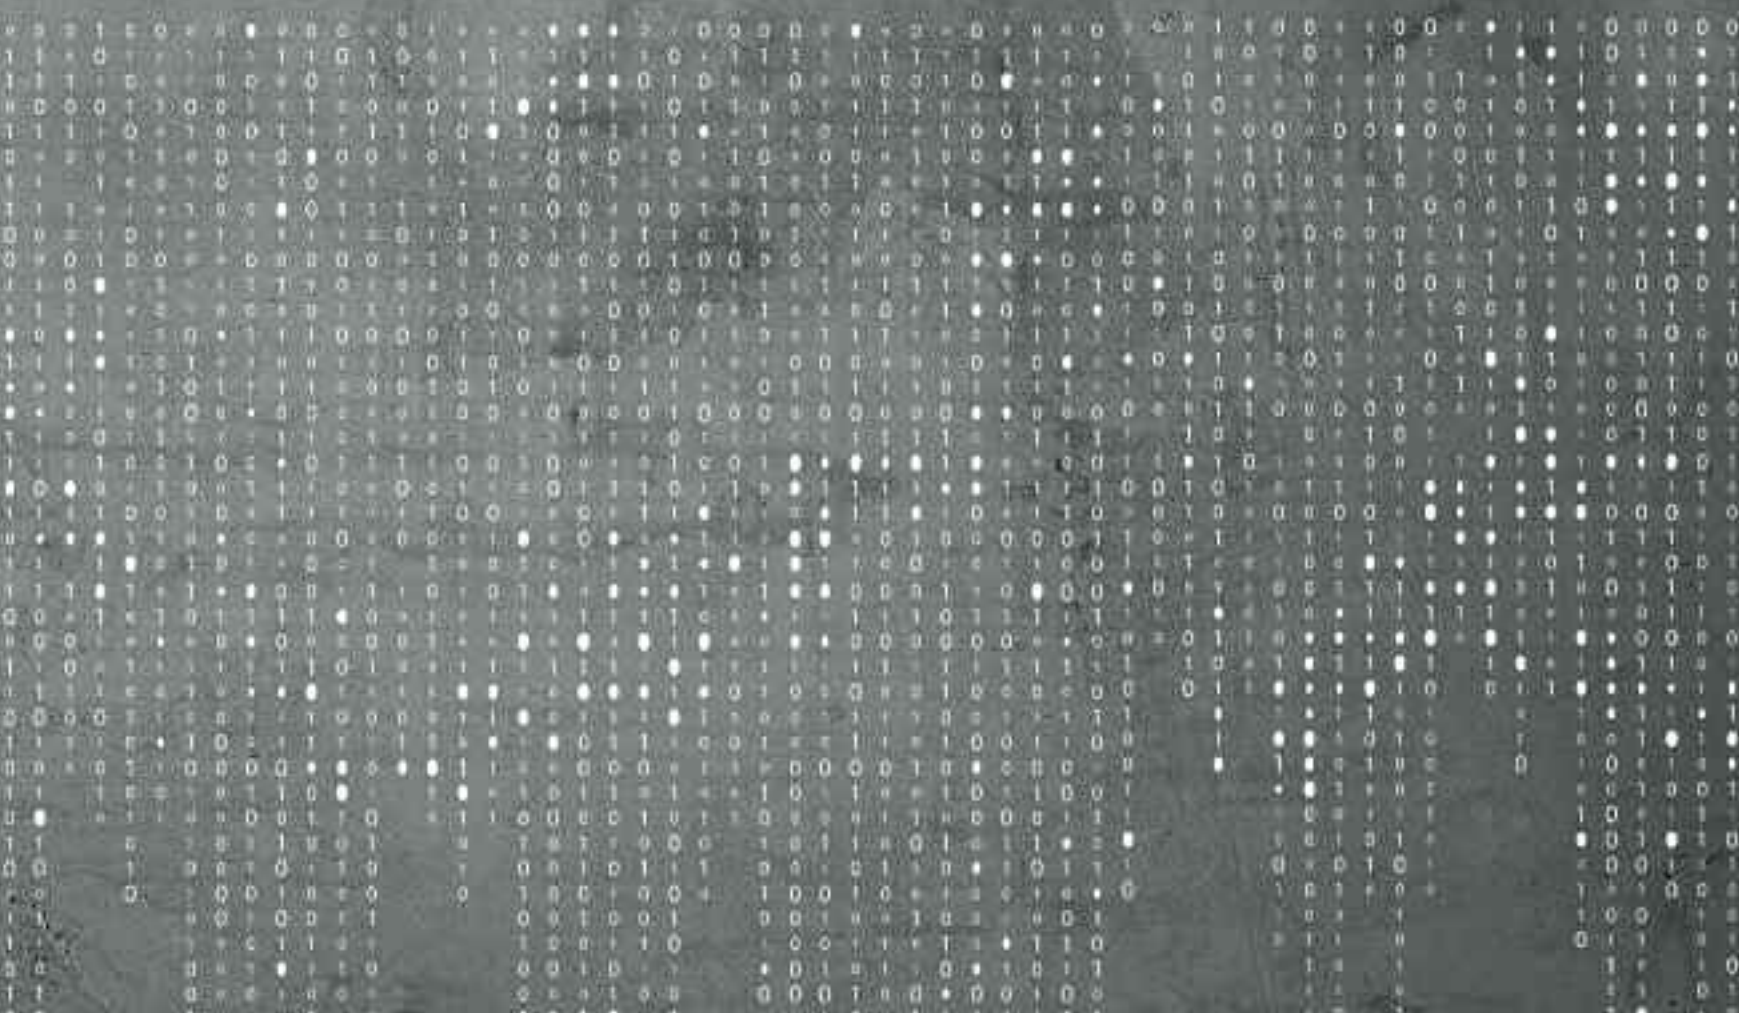

INDEX

About Alphabet	<p:_5>
Overview	<p:_9>
Alpha	<p:_17>
Beta	<p:_29>
Sigma	<p:_41>
Kappa	<p:_53>
Profiles	<p:_65>
Thita_Zita_Xi	<p:_75>
Compine objects	<p:_91>
Curves	<p:_97>
Track Lights	<p:_103>



</ ALPHA>



Behind the letters

Alphabet is more than a lighting brand.

It is an archetypal code of communication among lighting experts. It is a lighting concept.

It is a code we share together to “script” light and achieve the perfect fusion of decorative & architectural in lighting.


Write your own story

Customization, customization, customization.

Alphabet is all about playing with endless and playful combinations of lighting systems.

Get inspired. Form the lighting result you wish.

You now have at your disposal an architectural form which allows you to create without limitations, using bespoke lighting fixtures.

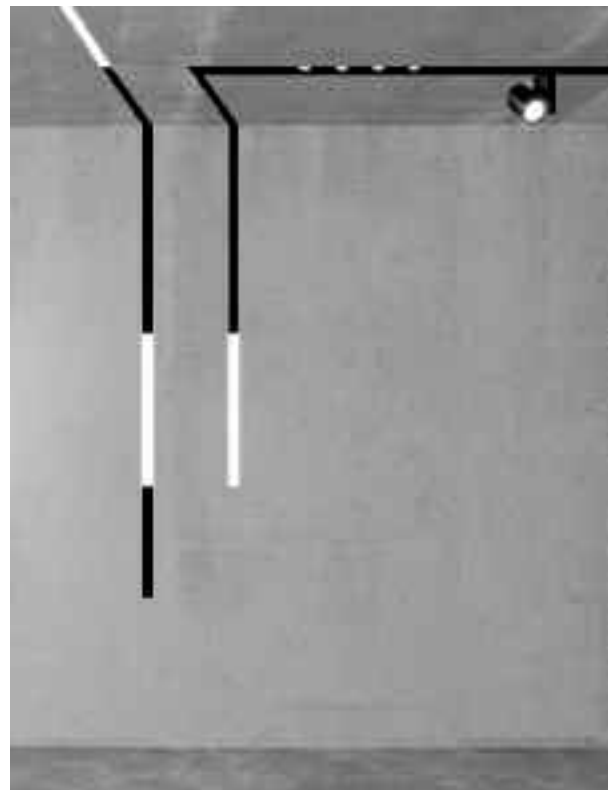

</ SIGMA >



Talk “alphabet” to me

Complex lighting combinations do not
require complex ordering processes.


Alphabet can make it easy for you to code
what you need...kind of like scripting light
(yes, it is not our motto without a reason).

So...give it a try and discover
how to talk “alphabet” to us.

It does not have to seem “greek” to you

Alphabet has its origins in Greece, but we bet it
will not take you long to become familiar,
not only with our products, but also with
the team behind them. The alphabet team shares
the same passion with you, speaks your
“language” and has the know-how and
background to make things work for you.

</ KAPPA >

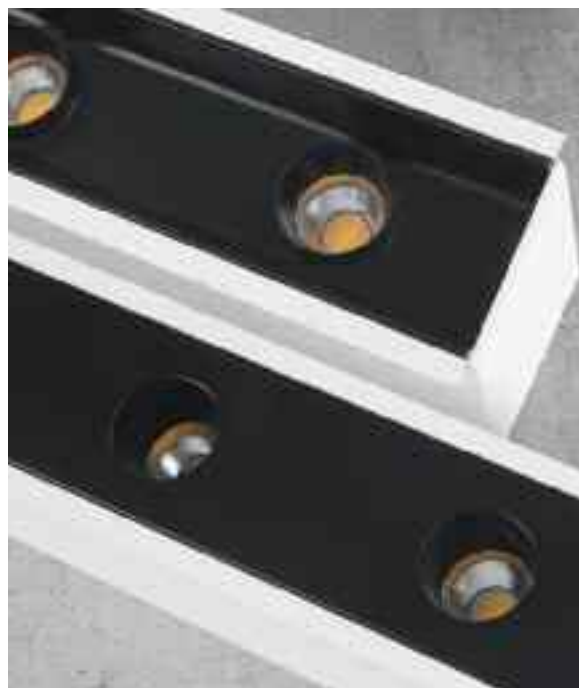

A to...Zambelis

Alphabet comes with the signature and know-how of Zambelis Lights, one of the most dynamic, modern, Greek companies, specializing in the wholesale of professional architectural and decorative lighting. Founded in 1967 in Greece, Zambelis Lights has over 50 years of experience in manufacturing high quality products, with innovative designs, driven by customer insights and a dedicated R&D department. Since 2017, this experience is shared beyond borders, as the company has established its international presence, with exports to both EU and non EU countries.





Colours – Special Decor



Body Colour

W = White
B = Black
G = Grey
L = Old Steel
R = Old Copper
M = White Marble



Cover Colour

B = Black
O = Gold
C = Cooper



Ceiling


Recessed

Trimless


Pendant

Up&Down


ALPHA

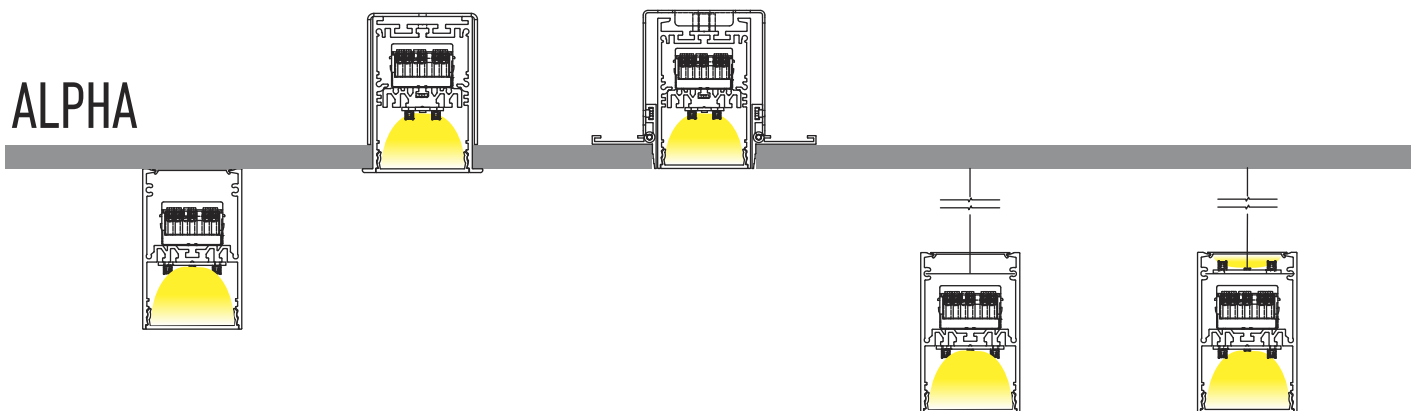


BETA

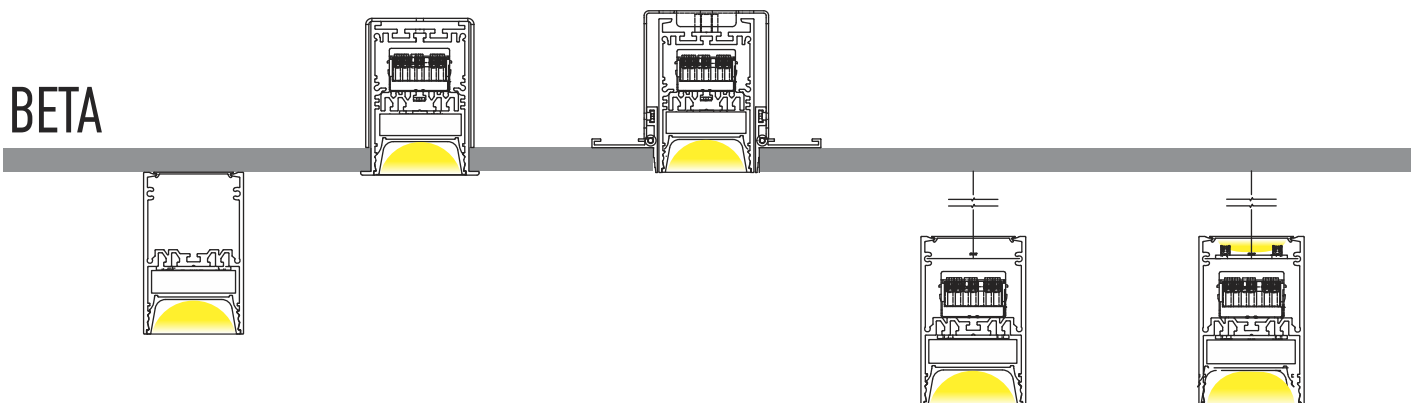

SIGMA

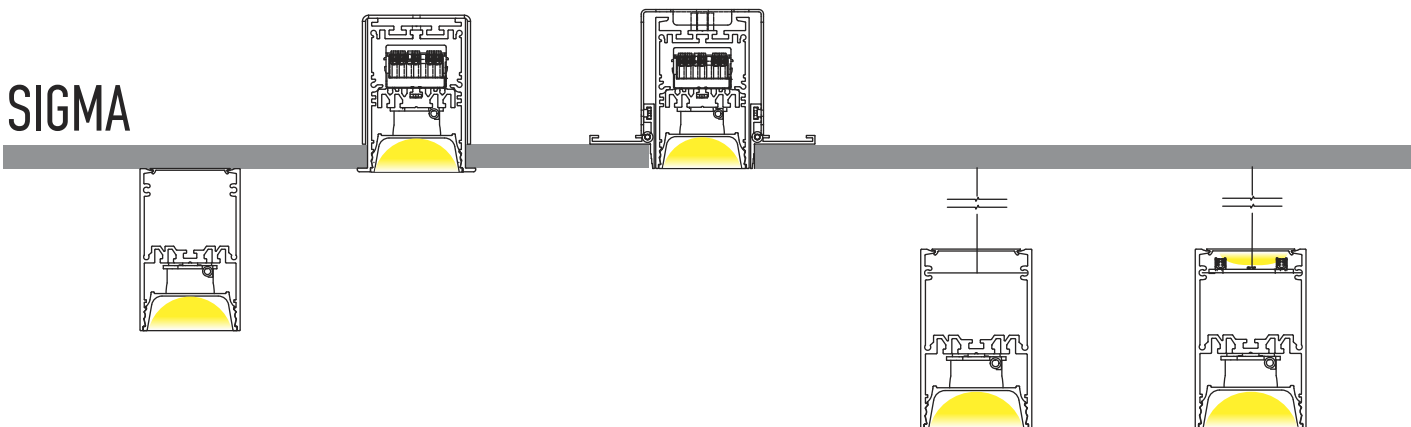

KAPPA

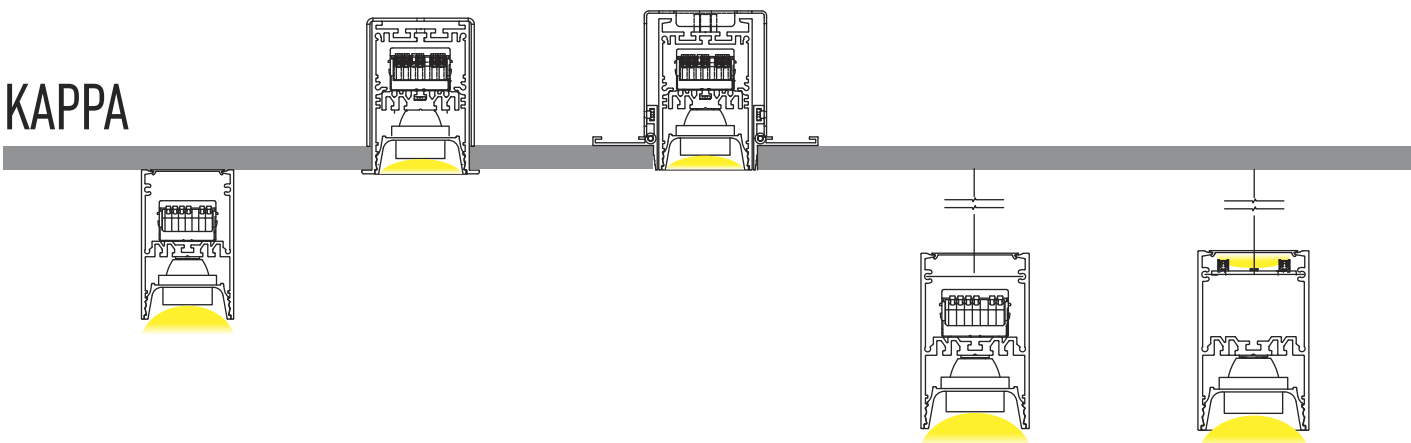

Ceiling


Recessed

Trimless


Pendant

Up&Down


EPSILON

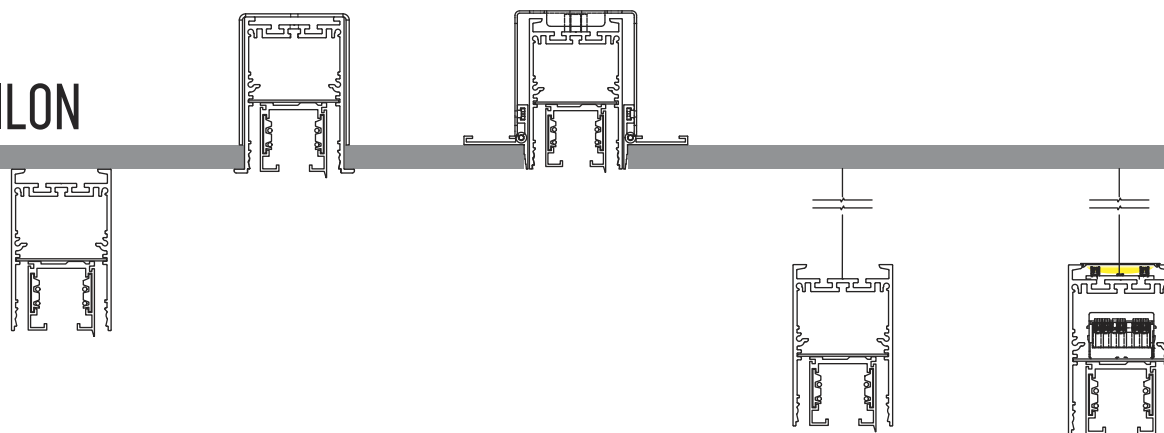


LAMDA

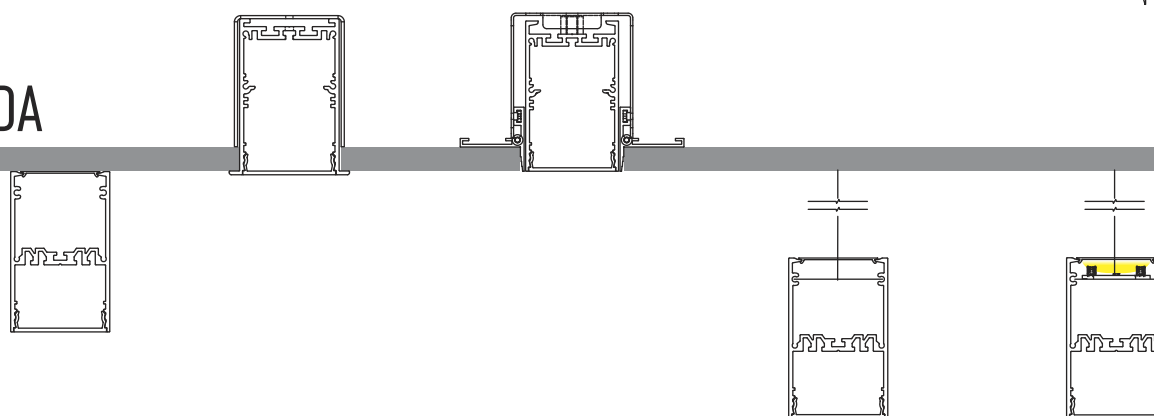


HETA

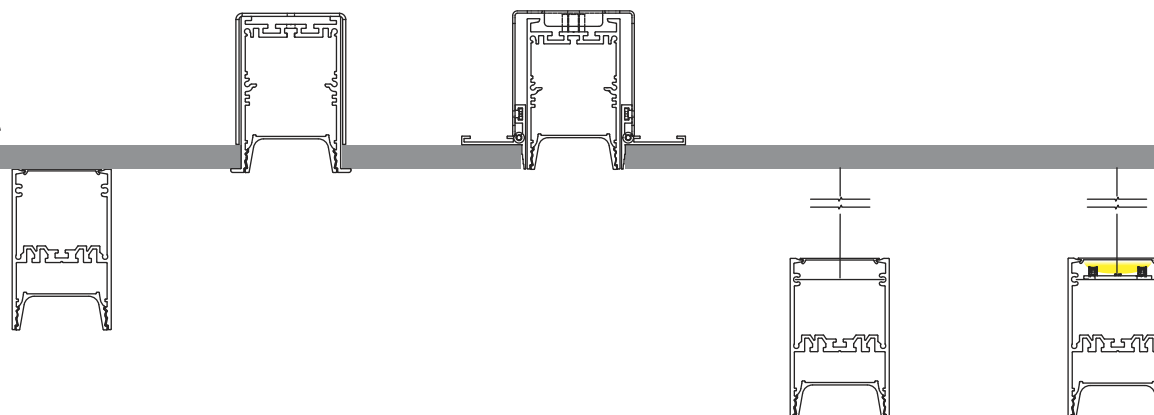

GAMA

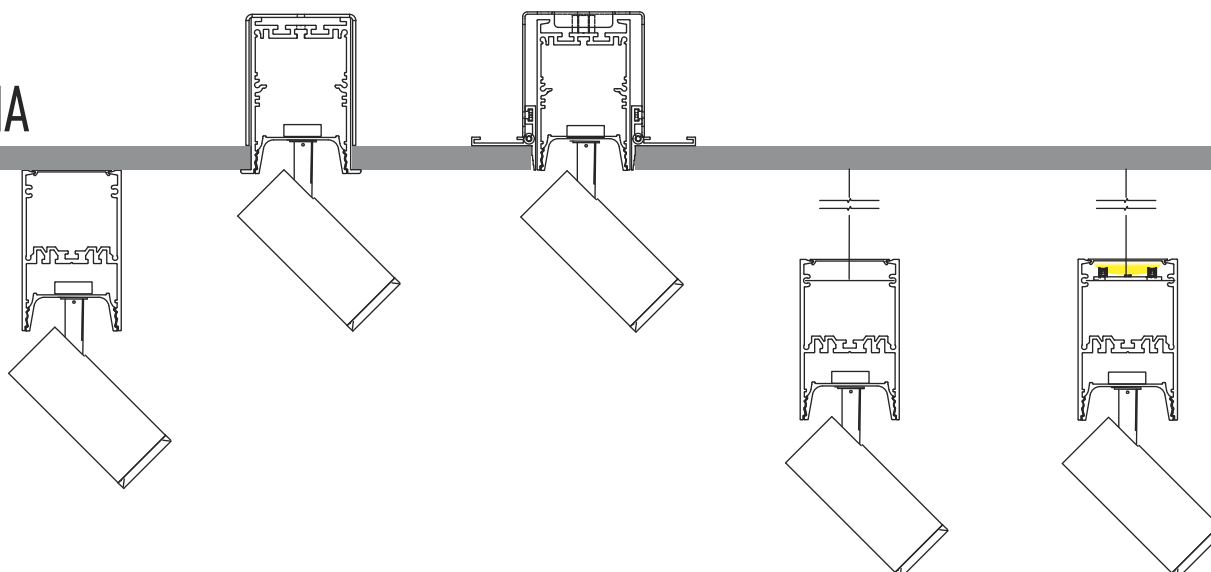

ALPHA




Optionally, uplight with LED Board in 2 different Lumen output + Tunable White or LED Stripe*

*Available in Pendant version only


Extruded Aluminum painted in different colour and different length



LED driver ON/OFF_DALI_Push Button_1-10V_Bluetooth




LED Board with heatsink in 3 different Lumen output + Tunable White



PC Cover Mat Opal or Microprismatic

BETA




Optionally, uplight with LED Board in 2 different Lumen output + Tunable White or LED Stripe *

*Available in Pendant version only


Extruded Aluminum painted in different colour and different length



LED driver ON/OFF_DALI_Push Button_1-10V_Bluetooth




LED Board with heatsink in 2 different Lumen output with 3 different Lenses

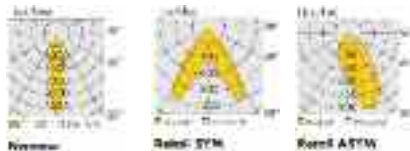

Optionally, with dark louver for reduced UGR

KAPPA



Optionally, uplight with LED Board in 2 different Lumen output + Tunable White or LED Stripe *

*Available in Pendant version only

Extruded Aluminum painted in different colour and different length



LED driver ON/OFF_DALI_Push Button_1-10V_Bluetooth




LED Board COB up to 9W in 2 different lighting distributions



15°




30°



Deep or Cylinder version for reduced UGR

SIGMA




Optionally, uplight with LED Board in 2 different Lumen output + Tunable White or LED Stripe*

*Available in Pendant version only


Extruded Aluminum painted in different colour and different length



LED driver ON/OFF_DALI_Push Button_1-10V_Bluetooth




LED Board SMD up to 3W in 3 different lighting distributions




15°



30°



12-50°



Dark or louver version for reduced UGR

Insets

Alpha & Beta

58 cm
HE-1566Lm/10W-150Lm/W
HO-2610Lm/18W-142Lm/W
XB-4000Lm/23W-169Lm/W
TW-2784Lm/27W-102Lm/W

86 cm
HE-2322Lm/15W-150Lm/W
HO-3870Lm/27W-142Lm/W
XB-6000Lm/35W-169Lm/W
TW-4128Lm/40W-102Lm/W

114 cm
HE-3078Lm/21W-150Lm/W
HO-5130Lm/36W-142Lm/W
XB-8000Lm/46W-169Lm/W
TW-5472Lm/54W-102Lm/W

142 cm
HE-3834Lm/26W-150Lm/W
HO-6390Lm/45W-142Lm/W
XB-10000Lm/58W-169Lm/W
TW-6816Lm/67W-102Lm/W

170 cm
HE-4590Lm/31W-150Lm/W
HO-7650Lm/54W-142Lm/W
XB-12000Lm/69W-169Lm/W
TW-8160Lm/80W-102Lm/W

198 cm
HE-5346Lm/36W-150Lm/W
HO-8910Lm/63W-142Lm/W
XB-14000Lm/81W-169Lm/W
TW-9504Lm/93W-102Lm/W

226 cm
HE-6102Lm/41W-150Lm/W
HO-10170Lm/72W-142Lm/W
XB-16000Lm/92W-169Lm/W
TW-10848Lm/106W-102Lm/W

254 cm
HE-6858Lm/46W-150Lm/W
HO-11430Lm/81W-142Lm/W
XB-18000Lm/104W-169Lm/W
TW-12192Lm/119W-102Lm/W

282 cm
HE-7614Lm/51W-150Lm/W
HO-12690Lm/90W-142Lm/W
XB-20000Lm/115W-169Lm/W
TW-13536Lm/133W-102Lm/W

310 cm
HE-8370Lm/56W-150Lm/W
HO-13950Lm/99W-142Lm/W
XB-22000Lm/127W-169Lm/W
TW-14880Lm/146W-102Lm/W

338 cm
HE-9126Lm/61W-150Lm/W
HO-15210Lm/107W-142Lm/W
XB-24000Lm/138W-169Lm/W
TW-16224Lm/159W-102Lm/W

366 cm
HE-9882Lm/66W-150Lm/W
HO-16470Lm/116W-142Lm/W
XB-26000Lm/150W-169Lm/W
TW-17568Lm/172W-102Lm/W


394 cm
HE-10638Lm/71W-150Lm/W
HO-17730Lm/125W-142Lm/W
XB-28000Lm/161W-169Lm/W
TW-18912Lm/185W-102Lm/W

422 cm
HE-11394Lm/76W-150Lm/W
HO-18990Lm/134W-142Lm/W
XB-30000Lm/173W-169Lm/W
TW-20256Lm/198W-102Lm/W


450 cm
HE-12150Lm/81W-150Lm/W
HO-20250Lm/143W-142Lm/W
XB-32000Lm/196W-169Lm/W
TW-21600Lm/212W-102Lm/W



- 5years warranty



- L80 B50 @50.000h (Ta 24°)



- Color consistency <3SDCM



- High Efficiency 150Lm/W - 2700Lm/m



- High Output 142Lm/W - 4500Lm/m



- Extra Bright 169Lm/W - 7000Lm/m



- Tunable White 100Lm/W - 4800Lm/m





</ ALPHA>

ALPHA Ceiling




ALPHA Ceiling LED PROFILE

'ALPHA' Ceiling is a LED profile luminaire, made of an extruded aluminum, powder-coated with fine matte finish. Designed for ceiling mounting, providing direct light emission through a diffuser made either of satined polycarbonate for an almost homogeneous emission of light, or of a mat microprismatic for reduced UGR. Luminaire equipped with the latest generation of well known LED boards, with small color tolerance MacAdam 3, according to Zhaga book 7. Drivers ON-OFF or dimmable.

Features:


- Available from 58cm to 450cm
- In three different Lumen output types plus tunable white version
- CRI 80 and optionally 90
- CCT 3000K and 4000K. Optionally 2700K and 6500K
- With satinated or microprismatic optic cover
- On-off or dimmable version (Dali, 0-10V, Push Button and Bluetooth)
- Coming in white, black and gray powder coated and in special decor Old Steel, Old Copper and White Marble
- 5years warranty
- L80 B50 @50.000h (Ta 24°)
- Color consistency <3SDCM
- Seamless and continuous light

Led Code: **AC**       

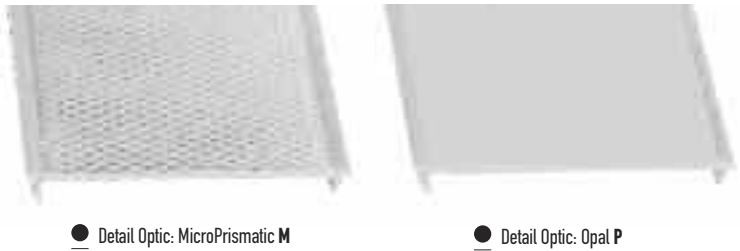





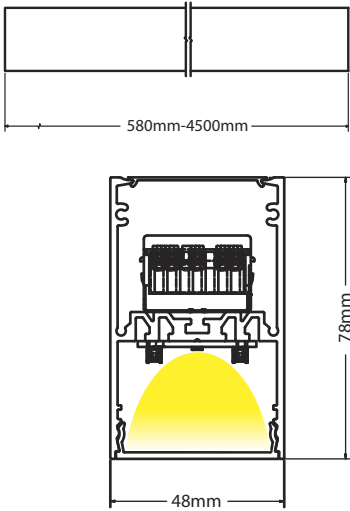


● Detail Optic: MicroPrismatic M

● Detail Optic: Opal P




Fill in your code using the following items from the table

						
Length	Inset	CRI	CCT	Optic	Driver	Body Colour
058 = 0,58cm	254= 254cm	1 = HE-2700Lm/mtr-150Lm/W	8 = 80	11 = TW	P = Opal	W = White
086 = 0,86cm	282 = 282cm	2 = H0-4500Lm/mtr-144Lm/W	9 = 90	27 = 2700	M = MicroPrismatic	B = Black
114 = 114cm	310 = 310cm	3 = Ex.Bright-7000Lm/mtr-160Lm/W		30 = 3000K		G = Grey
142 = 142cm	338 = 338cm	4 = TunableWhite-4800Lm/mtr-100Lm/W		40 = 4000K		L = Old Steel
170 = 170cm	366 = 366cm			65 = 6500K		R = Old Copper
198 = 198cm	394 = 394cm					M =White Marble
226 = 226cm	422= 422cm					
	450= 450cm					



ALPHA Recessed

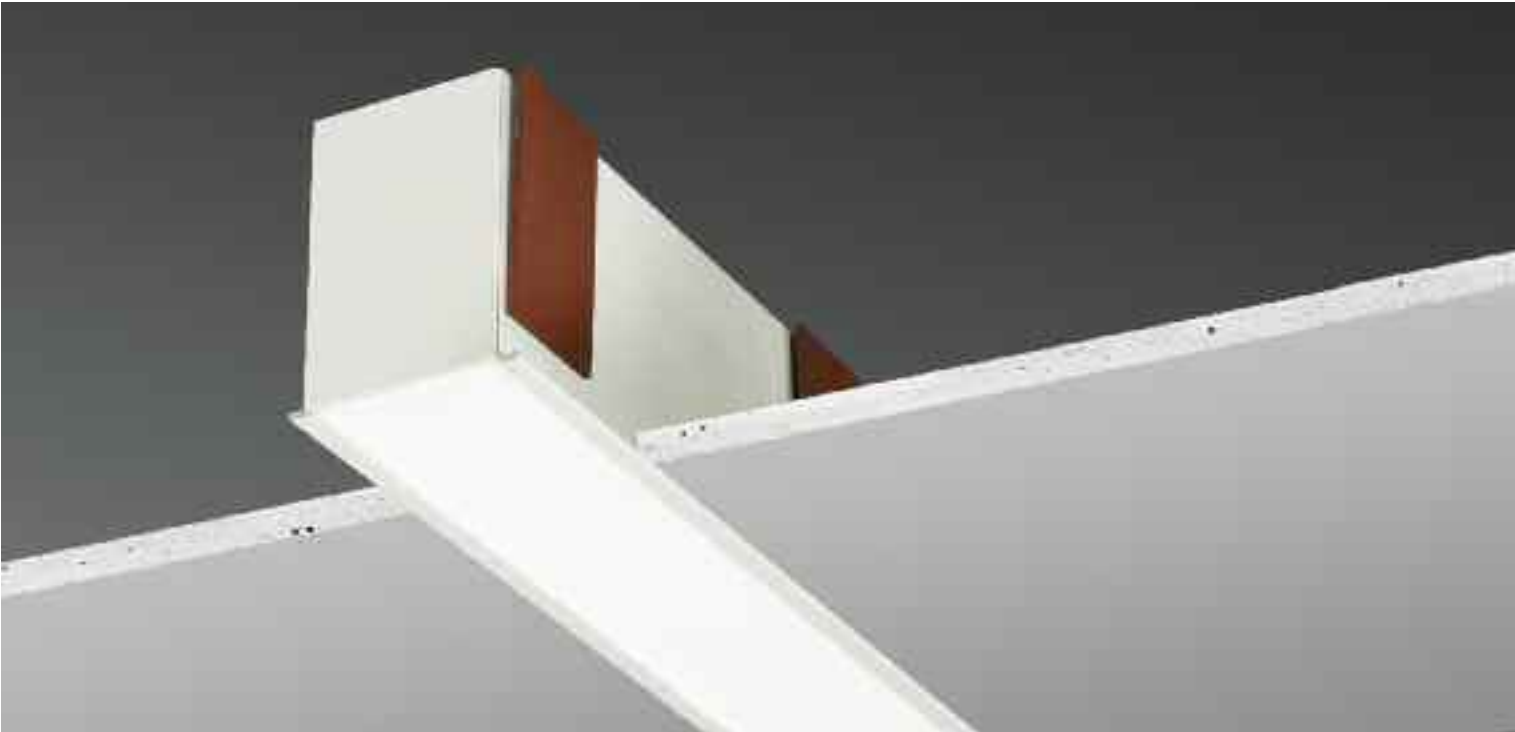

ALPHA Recessed LED PROFILE








'ALPHA' Recessed is a LED profile luminaire, made of an extruded aluminum, powder-coated with fine matte finish. Designed for recessed mounting with 8mm frame, providing direct light emission through a diffuser made either of satined polycarbonate for an almost homogeneous emission of light, or of a mat microprismatic for reduced UGR. Luminaire equipped with the latest generation of well known LED boards, with small color tolerance MacAdam 3, according to Zhaga book 7. Drivers ON-OFF or dimmable.


Features:

- Available from 58cm to 450cm
- In three different Lumen output types plus tunable white version
- CRI 80 and optionally 90
- CCT 3000K and 4000K. Optionally 2700K and 6500K
- With satinated or microprismatic optic cover
- On-off or dimmable version (Dali, 0-10V, Push Button and Bluetooth)
- Coming in white, black and gray powder coated
- 5years warranty
- L80 B50 @50.000h (Ta 24°)
- Color consistency <3SDCM
- Seamless and continuous light

Led Code: **AR**       


Fill in your code using the following items from the table

						
Length	Inset	CRI	CCT	Optic	Driver	Body Colour
058 = 0,58cm	254= 254cm	1 = HE-2700Lm/mtr-150Lm/W	8 = 80	11 = TW	P = Opal	W = White
086 = 0,86cm	282 = 282cm	2 = HO-4500Lm/mtr-144Lm/W	9 = 90	27 = 2700	M = MicroPrismatic	D = Dali
114 = 114cm	310 = 310cm	3 = Ex.Bright-7000Lm/mtr-160Lm/W	30 = 3000K		V = 0-10V	P = Push
142 = 142cm	338 = 338cm	4 = TunableWhite-4800Lm/mtr-100Lm/W	40 = 4000K		B = Bluetooth	
170 = 170cm	366 = 366cm		65 = 6500K			
198 = 198cm	394 = 394cm					
226 = 226cm	422 = 422cm					
	450 = 450cm					

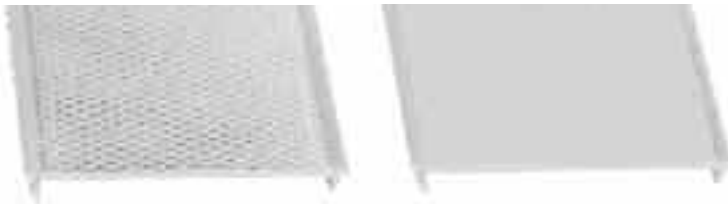

● Detail Optic: MicroPrismatic **M**

● Detail Optic: Opal **P**

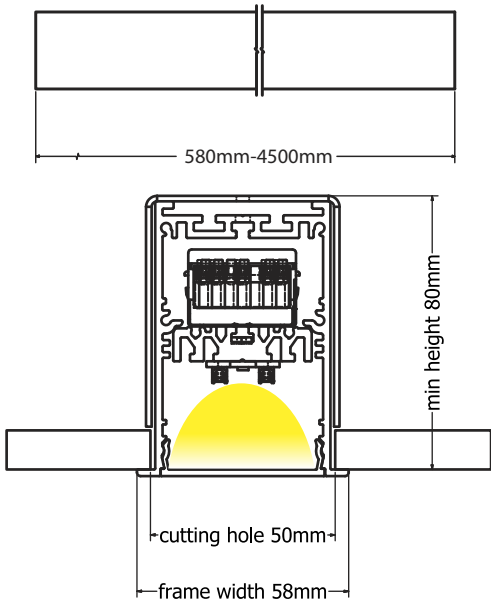



ALPHA Trimless



ALPHA Trimless LED PROFILE

'ALPHA' Trimless is a LED profile luminaire, made of an extruded aluminum, powder-coated with fine matte finish. Designed for recessed mounting without frame, providing direct light emission through a diffuser made either of satined polycarbonate for an almost homogeneous emission of light, or of a mat microprismatic for reduced UGR. Luminaire equipped with the latest generation of well known LED boards, with small color tolerance MacAdam 3, according to Zhaga book 7. Drivers ON-OFF or dimmable.


Features:

- Available from 58cm to 450cm
- In three different Lumen output types plus tunable white version
- CRI 80 and optionally 90
- CCT 3000K and 4000K. Optionally 2700K and 6500K
- With satinated or microprismatic optic cover
- On-off or dimmable version (Dali, 0-10V, Push Button and Bluetooth)
- Coming in white, black and gray powder coated
- 5years warranty
- L80 B50 @50.000h (Ta 24°)
- Color consistency <3SDCM
- Seamless and continuous light

Led Code: **AT** ◀ ▶ ☉ ▲ ■ ● ◇ ♀



Fill in your code using the following items from the table


◀ ▶	☉	▲	■	●	◇	♀
Length	Inset	CRI	CCT	Optic	Driver	Body Colour
058 = 0,58cm	254= 254cm	1 = HE-2700Lm/mtr-150Lm/W	8 = 80	P = Opal	O = On/Off	W = White
086 = 0,86cm	282 = 282cm	2 = HQ-4500Lm/mtr-144Lm/W	9 = 90	M = MicroPrismatic	D = Dali	B = Black
114 = 114cm	310 = 310cm	3 = Ex.Bright-7000Lm/mtr-160Lm/W	27 = 2700		V = 0-10V	G = Grey
142 = 142cm	338 = 338cm	4 = TunableWhite-4800Lm/mtr-100Lm/W	30 = 3000K		P = Push	
170 = 170cm	366 = 366cm		40 = 4000K		B = Bluetooth	
198 = 198cm	394 = 394cm		65 = 6500K			
226 = 226cm	422 = 422cm					
	450 = 450cm					

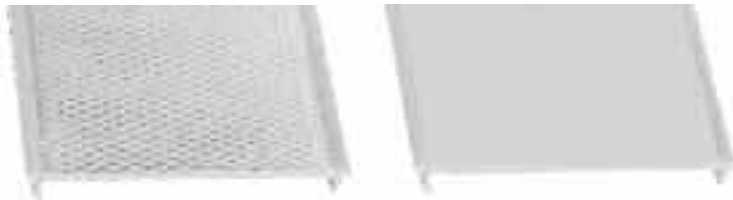

● Detail Optic: MicroPrismatic M

● Detail Optic: Opal P

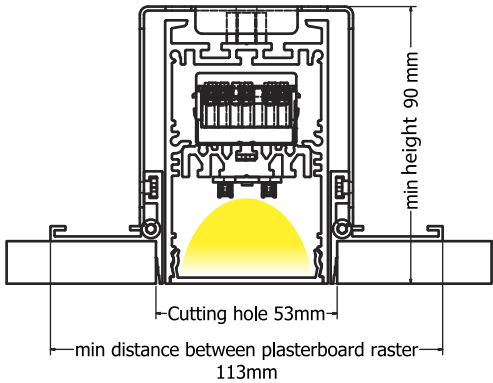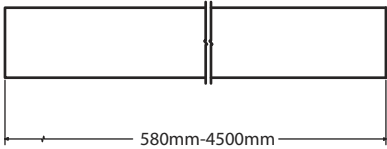

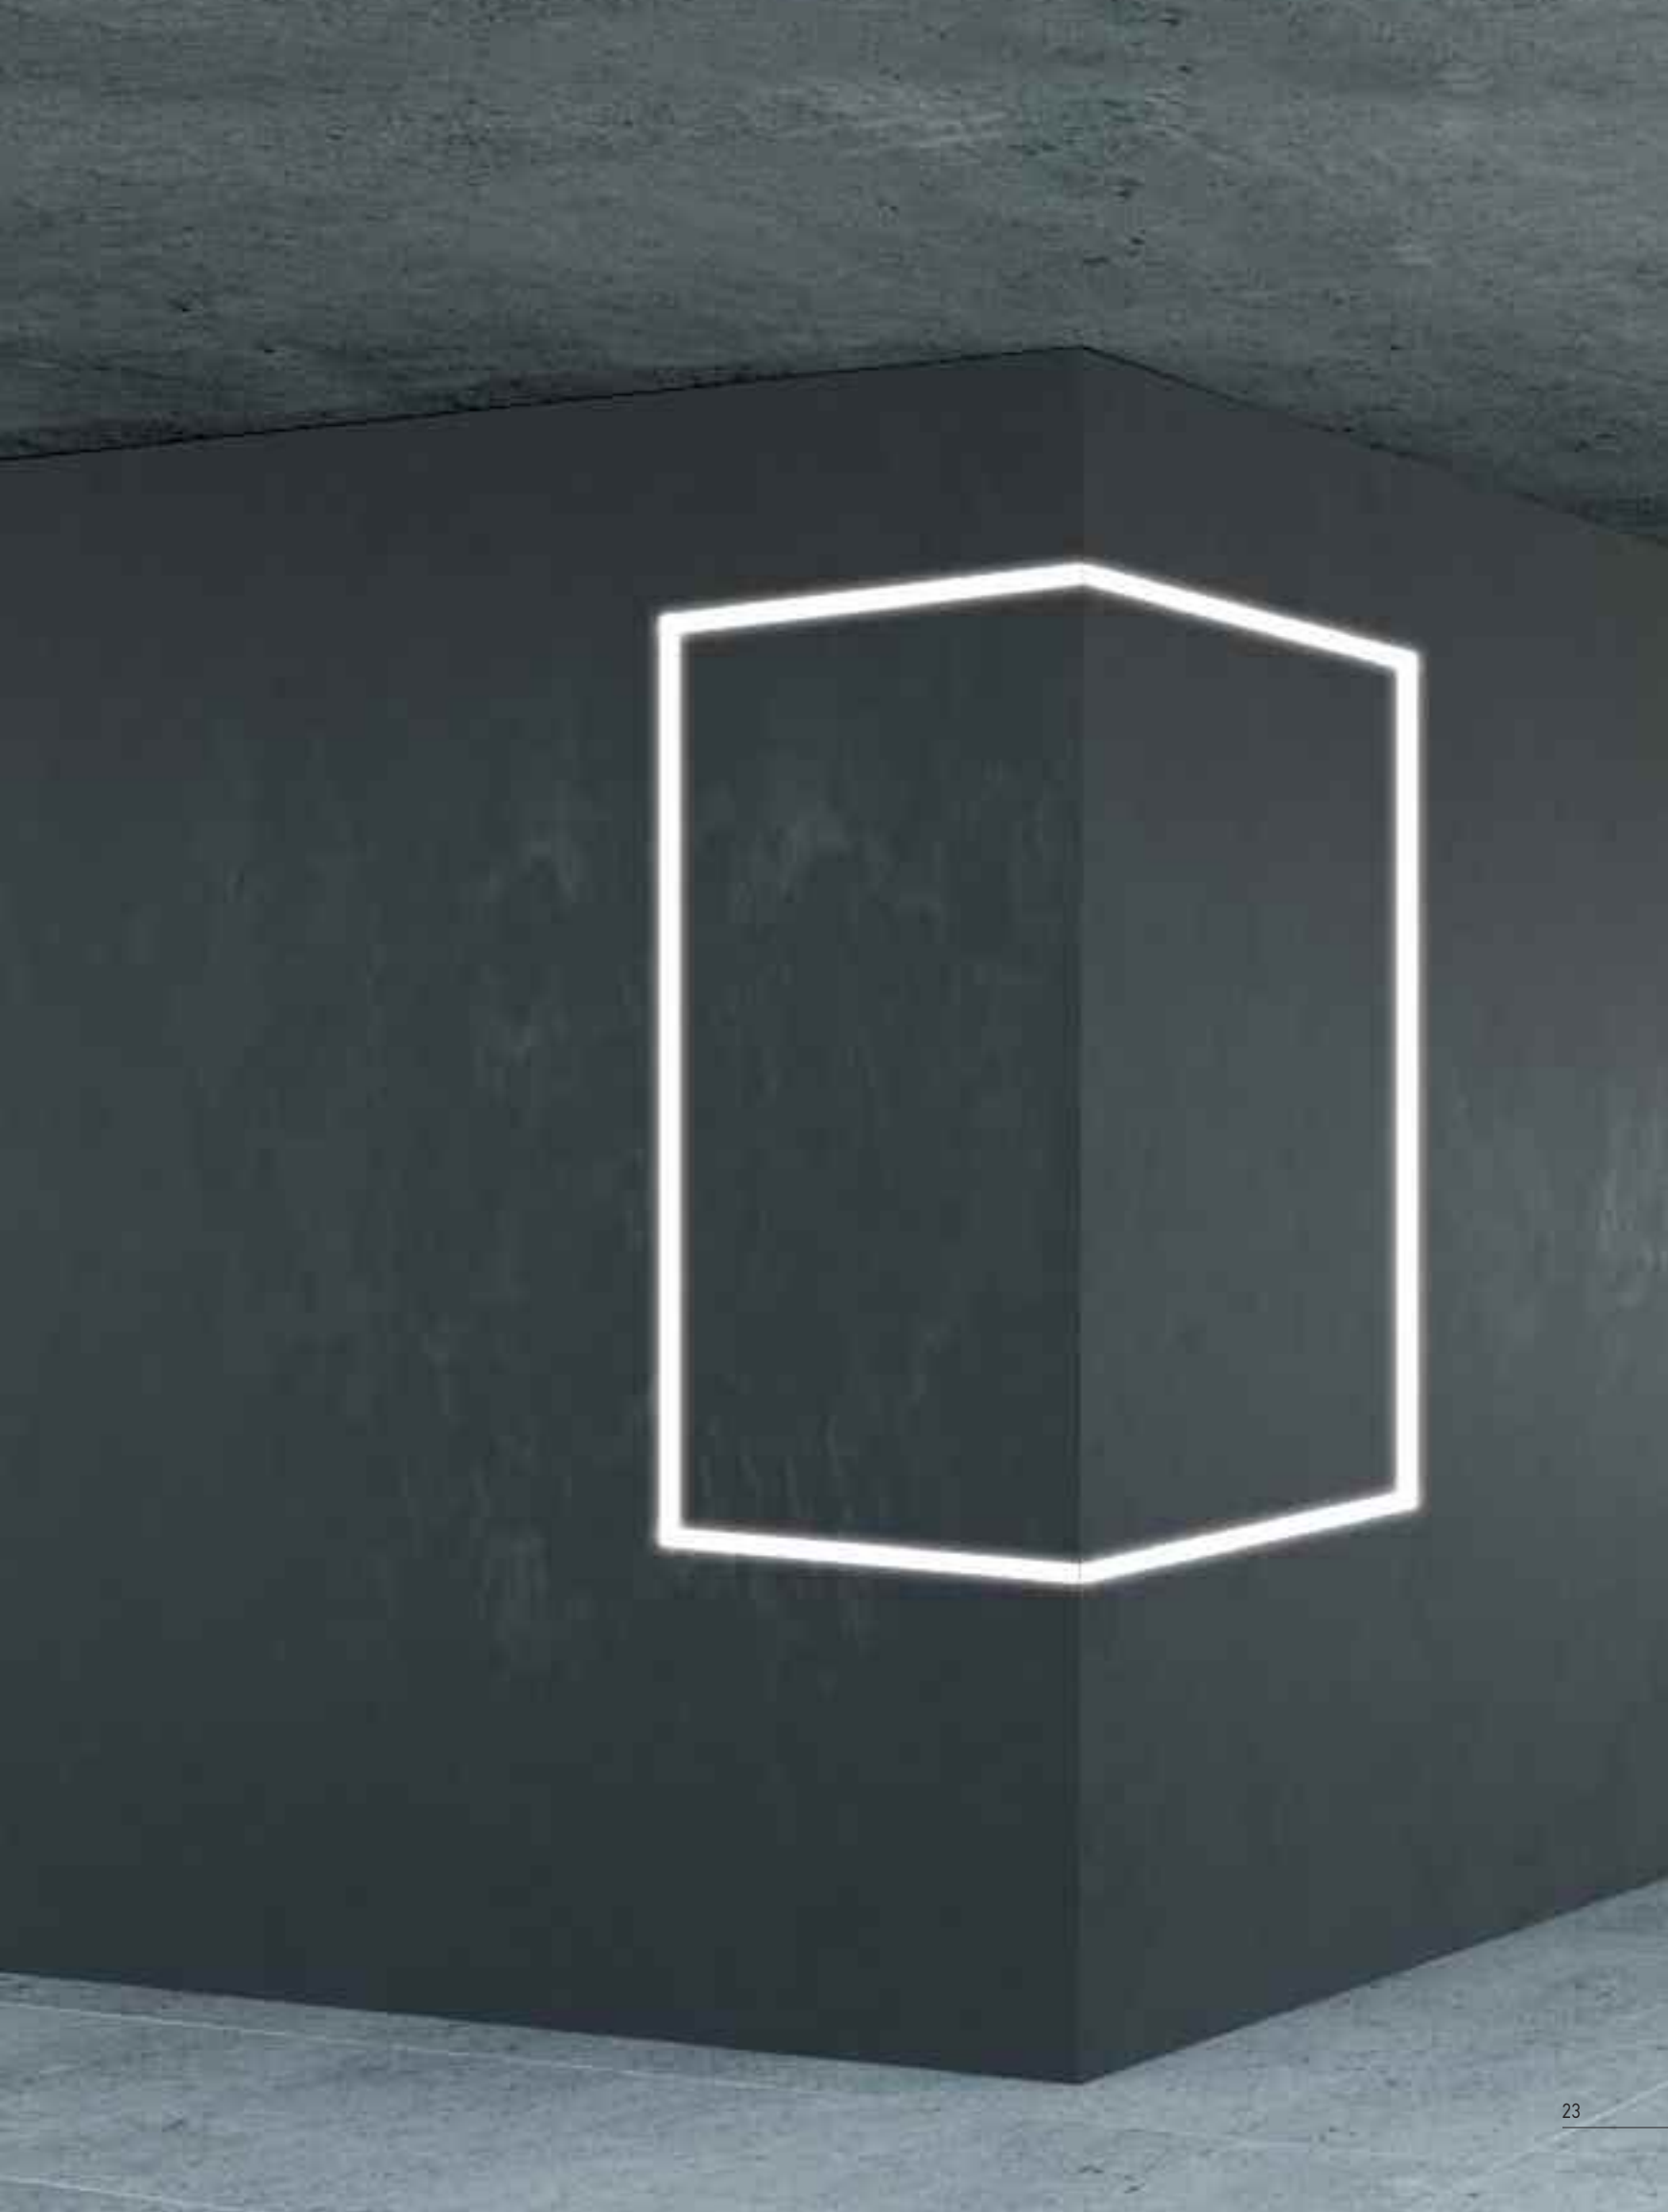

ALPHA Pendant




ALPHA Pendant LED PROFILE

'ALPHA' Pendant is a LED profile luminaire, made of an extruded aluminum, powder-coated with fine matte finish. Designed for ceiling pendant mounting, providing direct light emission through a diffuser made either of satined polycarbonate for an almost homogeneous emission of light, or of a mat microprismatic for reduced UGR. Luminaire equipped with the latest generation of well known LED boards, with small color tolerance MacAdam 3, according to Zhaga book 7. Drivers ON-OFF or dimmable.

Features:


- Available from 58cm to 450cm
- In three different Lumen output types plus tunable white version
- CRI 80 and optionally 90
- CCT 3000K and 4000K. Optionally 2700K and 6500K
- With satinated or microprismatic optic cover
- On-off or dimmable version (Dali, 0-10V, Push Button and Bluetooth)
- Coming in white, black and gray powder coated and in special decor Old Steel, Old Copper and White Marble
- 5years warranty
- L80 B50 @50.000h (Ta 24°)
- Color consistency <3SDCM
- Seamless and continuous light

Led Code: **AP**       

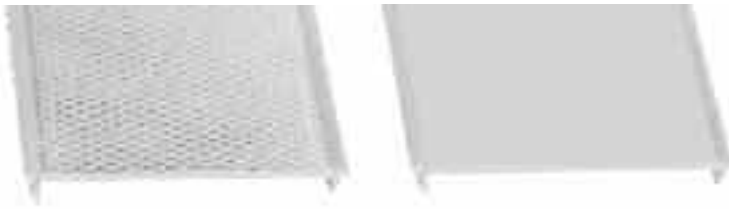





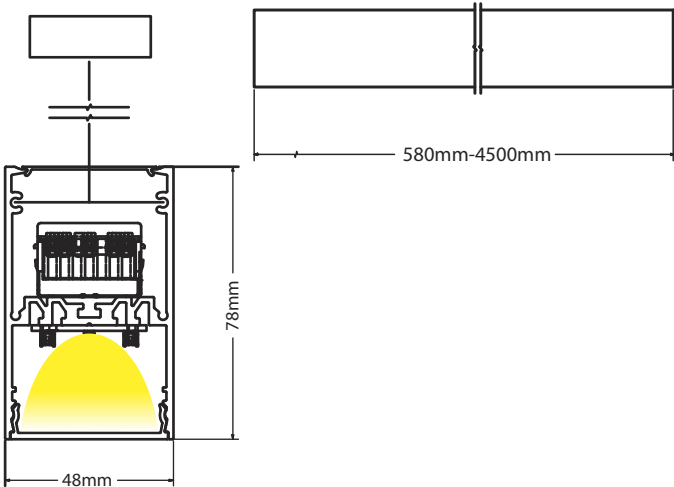


● Detail Optic: MicroPrismatic **M**

● Detail Optic: Opal **P**



Fill in your code using the following items from the table

						
Length	Inset	CRI	CCT	Optic	Driver	Body Colour
058 = 0,58cm	254 = 254cm	1 = HE-2700Lm/mtr-150Lm/W	11 = TW	P = Opal	O = On/Off	W = White
086 = 0,86cm	282 = 282cm	2 = HO-4500Lm/mtr-144Lm/W	27 = 2700	M = MicroPrismatic	D = Dali	B = Black
114 = 114cm	310 = 310cm	3 = Ex.Bright-7000Lm/mtr-160Lm/W	30 = 3000K		V = 0-10V	G = Grey
142 = 142cm	338 = 338cm	4 = TunableWhite-4800Lm/mtr-100Lm/W	40 = 4000K		P = Push	L = Old Steel
170 = 170cm	366 = 366cm		65 = 6500K		B = Bluetooth	R = Old Copper
198 = 198cm	394 = 394cm					M = White Marble
226 = 226cm	422 = 422cm					
	450 = 450cm					



ALPHA Up&Down




ALPHA Up&Down LED PROFILE

'ALPHA' Up&Down is a LED profile luminaire, made of an extruded aluminum, powder-coated with fine matte finish. Designed for ceiling pendant mounting, providing direct and indirect light emission through a diffuser made either of satined polycarbonate for an almost homogeneous emission of light, or of a mat microprismatic for reduced UGR. Luminaire equipped with the latest generation of well known LED boards, with small color tolerance MacAdam 3, according to Zhaga book 7. Drivers ON-OFF or dimmable.

Features:


- Available from 58cm to 450cm
- In three different Lumen output types plus tunable white version
- CRI 80 and optionally 90
- CCT 3000K and 4000K. Optionally 2700K and 6500K
- With satinated or microprismatic optic cover
- On-off or dimmable version (Dali, 0-10V, Push Button and Bluetooth)
- Coming in white, black and gray powder coated and in special decor Old Steel, Old Copper and White Marble
- 5years warranty
- L80 B50 @50.000h (Ta 24°)
- Color consistency <3SDCM
- Seamless and continuous light

Led Code: **AU**       

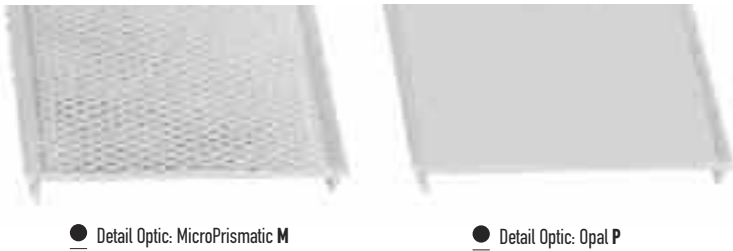





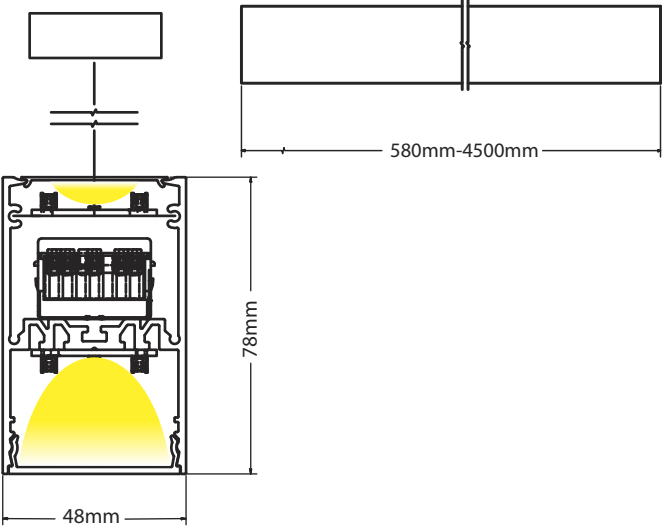


● Detail Optic: MicroPrismatic **M**

● Detail Optic: Opal **P**



Fill in your code using the following items from the table

						
Length	Inset	CRI	CCT	Optic	Driver	Body Colour
058 = 0,58cm	254= 254cm	1 = HE-2700Lm/mtr-150Lm/W	8 = 80	11 = TW	P = Opal	W = White
086 = 0,86cm	282 = 282cm	2 = HO-4500Lm/mtr-144Lm/W	9 = 90	27 = 2700	M = MicroPrismatic	B = Black
114 = 114cm	310 = 310cm	3 = Ex.Bright-7000Lm/mtr-160Lm/W		30 = 3000K		G = Grey
142 = 142cm	338 = 338cm	4 = TunableWhite-4800Lm/mtr-100Lm/W		40 = 4000K		L = Old Steel
170 = 170cm	366 = 366cm			65 = 6500K		R = Old Copper
198 = 198cm	394 = 394cm				B = Bluetooth	M =White Marble
226 = 226cm	422 = 422cm					
	450 = 450cm					








B

</ BETA>

BETA Ceiling

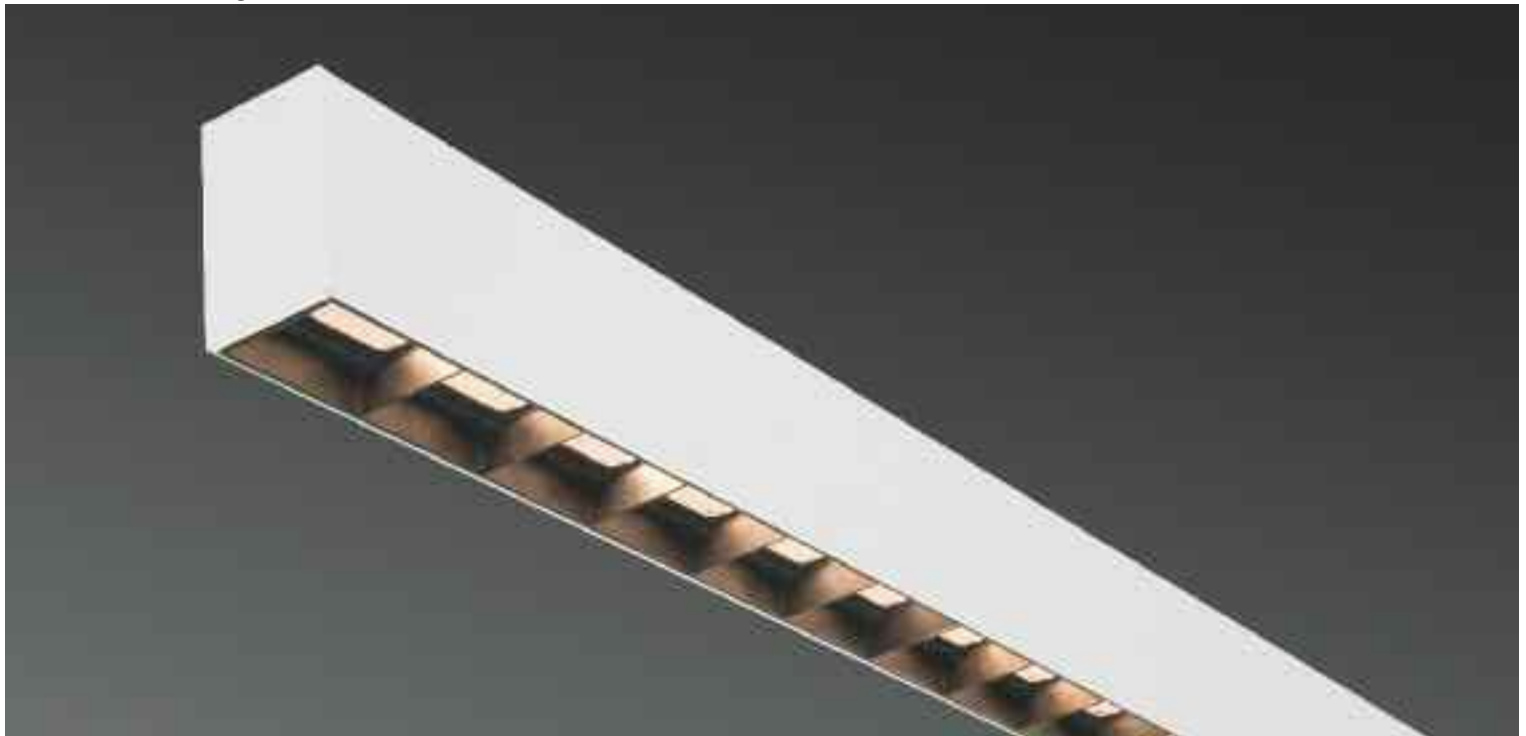

BETA Ceiling LED PROFILE

'BETA' Ceiling is a LED profile luminaire, made of an extruded aluminum, powder-coated with fine matte finish. Designed for ceiling mounting, providing direct light emission through linear lenses 30°, 60°, symmetrical or double asymmetrical angle beam. Linear louvers available for reduced UGR. Luminaire equipped with the latest generation of well known LED boards, with small color tolerance MacAdam 3, according to Zhaga book 7. Drivers ON-OFF or dimmable.

Features:



- Available from 48cm to 450cm
- In three different Lumen output types plus tunable white version
- CRI 80 and optionally 90
- CCT 3000K and 4000K. Optionally 2700K and 6500K
- With linear lenses 30°, 60°, symmetrical or double asymmetrical angle beam
- On-off or dimmable version (Dali, 0-10V, Push Button and Bluetooth)
- Coming in white, black and gray powder coated and in special decor Old Steel, Old Copper and White Marble
- 5years warranty
- L80 B50 @50.000h (Ta 24°)
- Color consistency <3SDCM
- Seamless and continuous light

Led Code: **BC**        











Detail Cover: Louver Oval **O**

Detail Cover: Flat **F**



Fill in your code using the following items from the table

							
Length	Inset	CRI	CCT	Optic	Driver	Cover	Body Colour
058 = 0,58cm	254 = 254cm	8 = 80	11 = TW	R = 30°	O = On/Off	F = Flat O = Louver Oval	W = White
086 = 0,86cm	282 = 282cm		30 = 3000K	W = 60°	D = Dali		B = Black
114 = 114cm	310 = 310cm		40 = 4000K	A = Asymmetric	V = 0-10V		G = Grey
142 = 142cm	338 = 338cm		65 = 6500K	D = Double Symmetric	P = Push		L = Old Steel
170 = 170cm	366 = 366cm				B = Bluetooth		R = Old Copper
198 = 198cm	394 = 394cm						M = White Marble
226 = 226cm	422 = 422cm						
450 = 450cm							



BETA Recessed



BETA Recessed LED PROFILE

'BETA' Recessed is a LED profile luminaire, made of an extruded aluminum, powder-coated with fine matte finish. Designed for recessed mounting with 8mm frame, providing direct light emission through linear lenses 30°, 60°, symmetrical or double asymmetrical angle beam. Linear louvers available for reduced UGR. Luminaire equipped with the latest generation of well known LED boards, with small color tolerance MacAdam 3, according to Zhaga book 7. Drivers ON-OFF or dimmable.


Features:

- Available from 48cm to 450cm
- In three different Lumen output types plus tunable white version
- CRI 80 and optionally 90
- CCT 3000K and 4000K. Optionally 2700K and 6500K
- With linear lenses 30°, 60°, symmetrical or double asymmetrical angle beam
- On-off or dimmable version (Dali, 0-10V, Push Button and Bluetooth)
- Coming in white, black and gray powder coated
- 5years warranty
- L80 B50 @50.000h (Ta 24°)
- Color consistency <3SDCM
- Seamless and continuous light



Detail Cover: Louver Oval **O**

Detail Cover: Flat **F**

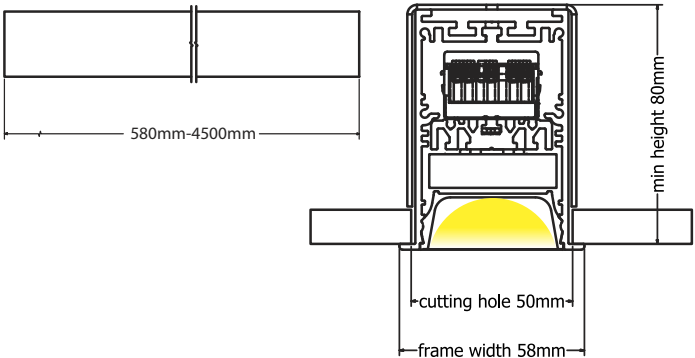


Led Code: **BR**

Fill in your code using the following items from the table

Length	Inset	CRI	CCT	Optic	Driver	Cover	Body Colour
058 = 0,58cm	254 = 254cm	8 = 80	11 = TW	R = 30°	O = On/Off	F = Flat	W = White
086 = 0,86cm	282 = 282cm		30 = 3000K	W = 60°	D = Dali	O = Louver Oval	B = Black
114 = 114cm	310 = 310cm		40 = 4000K	A = Asymmetric	V = 0-10V		G = Grey
142 = 142cm	338 = 338cm		65 = 6500K	D = Double Symmetric	P = Push		
170 = 170cm	366 = 366cm				B = Bluetooth		
198 = 198cm	394 = 394cm						
226 = 226cm	422 = 422cm						
	450 = 450cm						



BETA Trimless

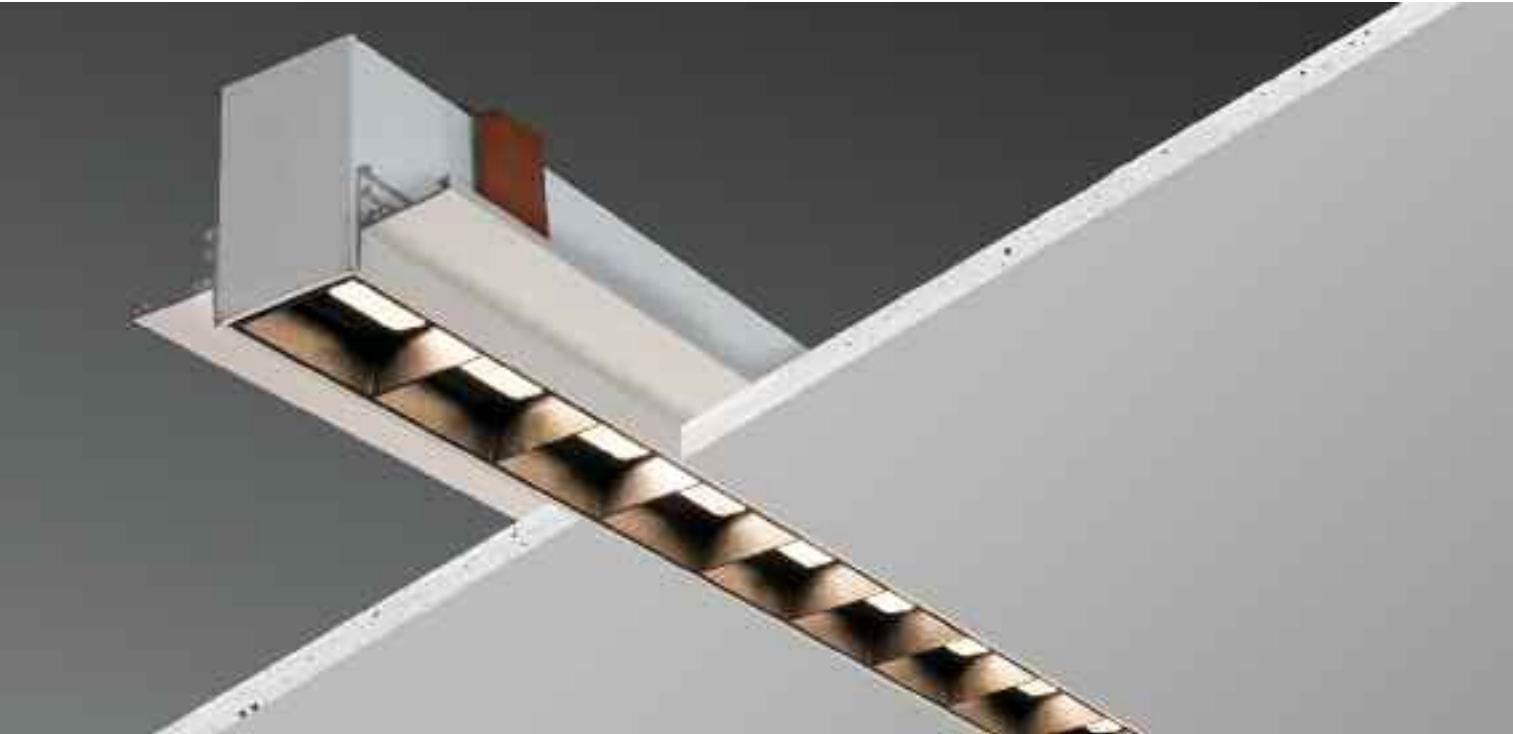


BETA Trimless LED PROFILE

'BETA' Trimless is a LED profile luminaire, made of an extruded aluminum, powder-coated with fine matte finish. Designed for recessed mounting without frame, providing direct light emission through linear lenses 30°, 60°, symmetrical or double asymmetrical angle beam. Linear louvers available for reduced UGR. Luminaire equipped with the latest generation of well known LED boards, with small color tolerance MacAdam 3, according to Zhaga book 7. Drivers ON-OFF or dimmable.

Features:

- Available from 48cm to 450cm
- In three different Lumen output types plus tunable white version
- CRI 80 and optionally 90
- CCT 3000K and 4000K. Optionally 2700K and 6500K
- With linear lenses 30°, 60°, symmetrical or double asymmetrical angle beam
- On-off or dimmable version (Dali, 0-10V, Push Button and Bluetooth)
- Coming in white, black and gray powder coated
- 5years warranty
- L80 B50 @50.000h (Ta 24°)
- Color consistency <3SDCM
- Seamless and continuous light

Led Code: **BT**

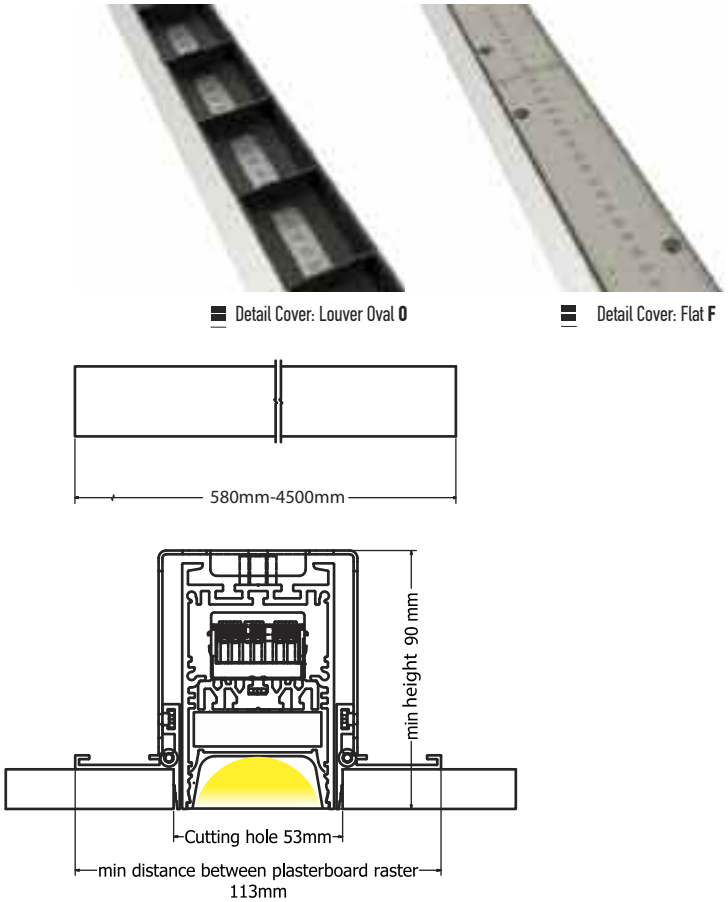


Fill in your code using the following items from the table

Length	Inset	CRI	CCT	Optic	Driver	Cover	Body Colour
058 = 0,58cm	254 = 254cm	8 = 80	11 = TW	R = 30°	O = On/Off	F = Flat	W = White
086 = 0,86cm	282 = 282cm		30 = 3000K	W = 60°	D = Dali	O = Louver Oval	B = Black
114 = 114cm	310 = 310cm		40 = 4000K	A = Asymmetric	V = 0-10V		G = Grey
142 = 142cm	338 = 338cm		65 = 6500K	D = Double Symmetric	P = Push		
170 = 170cm	366 = 366cm				B = Bluetooth		
198 = 198cm	394 = 394cm						
226 = 226cm	422 = 422cm						
450 = 450cm							



BETA Pendant

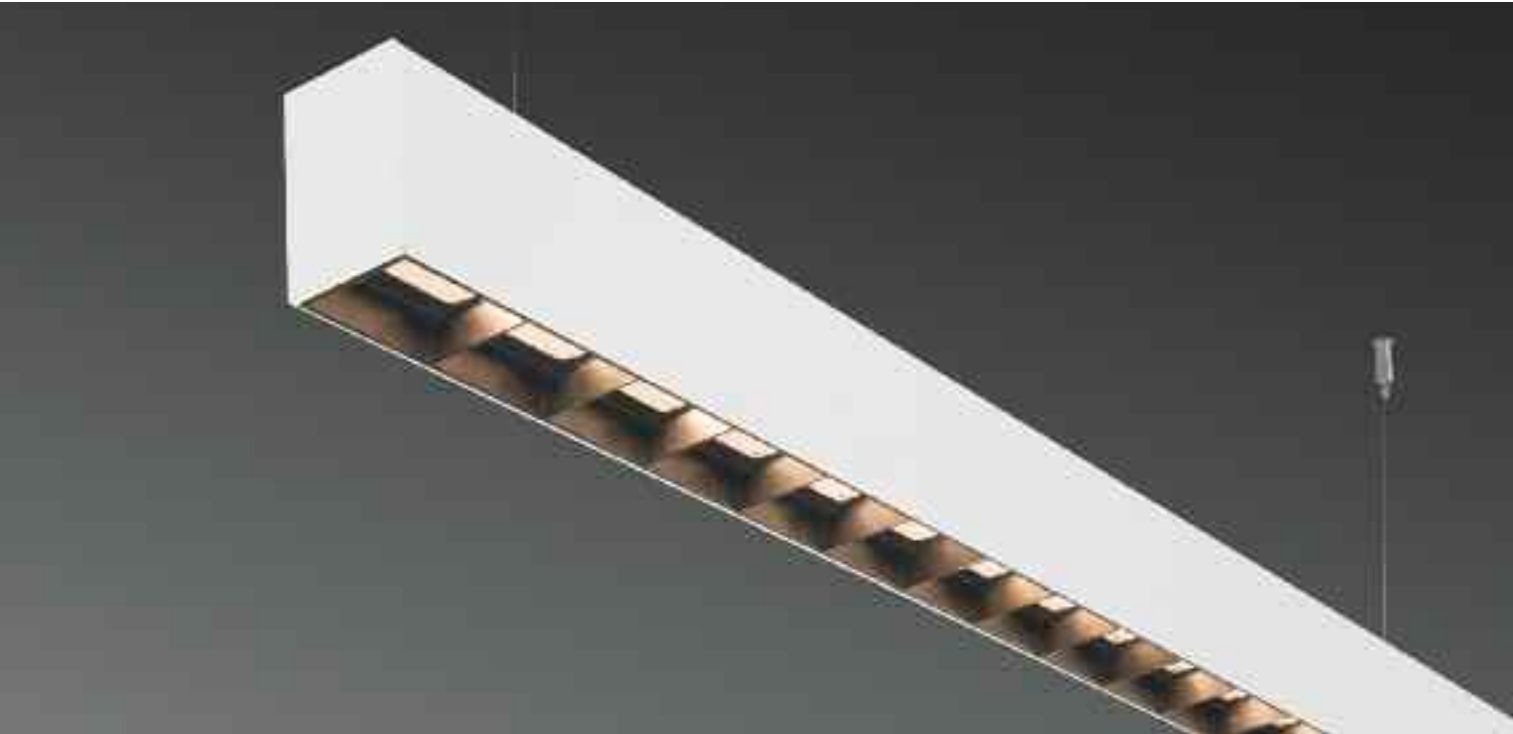

BETA Pendant LED PROFILE

'BETA' Pendant is a LED profile luminaire, made of an extruded aluminum, powder-coated with fine matte finish. Designed for ceiling pendant mounting, providing direct light emission through linear lenses 30°, 60°, symmetrical or double asymmetrical angle beam. Linear louvers available for reduced UGR. Luminaire equipped with the latest generation of well known LED boards, with small color tolerance MacAdam 3, according to Zhaga book 7. Drivers ON-OFF or dimmable.

Features:


- Available from 48cm to 450cm
- In three different Lumen output types plus tunable white version
- CRI 80 and optionally 90
- CCT 3000K and 4000K. Optionally 2700K and 6500K
- With linear lenses 30°, 60°, symmetrical or double asymmetrical angle beam
- On-off or dimmable version (Dali, 0-10V, Push Button and Bluetooth)
- Coming in white, black and gray powder coated and in special decor Old Steel, Old Copper and White Marble
- 5years warranty
- L80 B50 @50.000h (Ta 24°)
- Color consistency <3SDCM
- Seamless and continuous light

Led Code: **BP**        







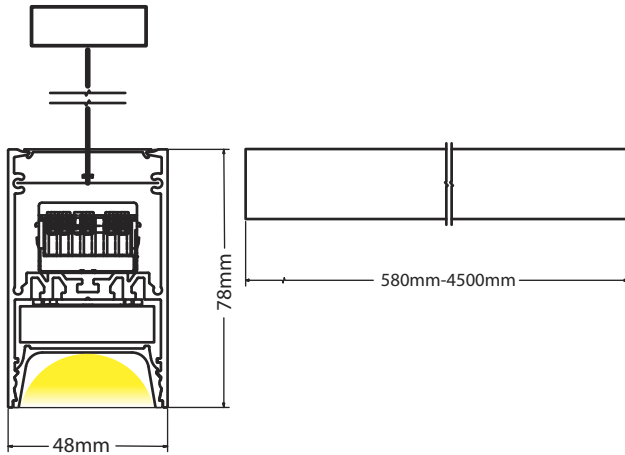



Detail Cover: Louver Oval **O**

Detail Cover: Flat **F**



Fill in your code using the following items from the table

							
Length	Inset	CRI	CCT	Optic	Driver	Cover	Body Colour
058 = 0,58cm	254 = 254cm	8 = 80	11 = TW	R = 30°	O = On/Off	F = Flat O = Louver Oval	W = White
086 = 0,86cm	282 = 282cm		30 = 3000K	W = 60°	D = Dali		B = Black
114 = 114cm	310 = 310cm		40 = 4000K	A = Asymmetric	V = 0-10V		G = Grey
142 = 142cm	338 = 338cm		65 = 6500K	D = Double Symmetric	P = Push		L = Old Steel
170 = 170cm	366 = 366cm				B = Bluetooth		R = Old Copper
198 = 198cm	394 = 394cm						M = White Marble
226 = 226cm	422 = 422cm						
450 = 450cm							



BETA Up&Down



BETA Up&Down LED PROFILE

'BETA' Up&Down is a LED profile luminaire, made of an extruded aluminum, powder-coated with fine matte finish. Designed for ceiling pendant mounting, providing direct and indirect light emission through linear lenses 30°, 60°, symmetrical or double asymmetrical angle beam. Linear louvers available for reduced UGR. Luminaire equipped with the latest generation of well known LED boards, with small color tolerance MacAdam 3, according to Zhaga book 7. Drivers ON-OFF or dimmable.

Features:


- Available from 48cm to 450cm
- In three different Lumen output types plus tunable white version
- CRI 80 and optionally 90
- CCT 3000K and 4000K. Optionally 2700K and 6500K
- With linear lenses 30°, 60°, symmetrical or double asymmetrical angle beam
- On-off or dimmable version (Dali, 0-10V, Push Button and Bluetooth)
- Coming in white, black and gray powder coated and in special decor Old Steel, Old Copper and White Marble
- 5years warranty
- L80 B50 @50.000h (Ta 24°)
- Color consistency <3SDCM
- Seamless and continuous light

Led Code: **BU**        







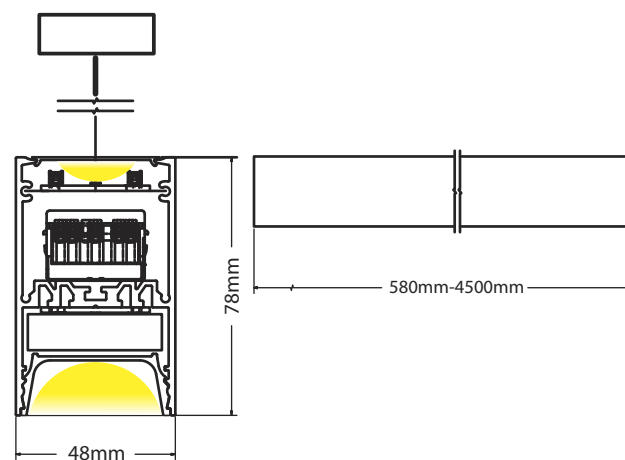



Detail Cover: Louver Oval **O**

Detail Cover: Flat **F**



Fill in your code using the following items from the table

							
Length	Inset	CRI	CCT	Optic	Driver	Cover	Body Colour
058 = 0,58cm	254 = 254cm	8 = 80	11 = TW	R = 30°	O = On/Off	F = Flat O = Louver Oval	W = White
086 = 0,86cm	282 = 282cm		30 = 3000K	W = 60°	D = Dali		B = Black
114 = 114cm	310 = 310cm		40 = 4000K	A = Asymmetric	V = 0-10V		G = Grey
142 = 142cm	338 = 338cm		65 = 6500K	D = Double Symmetric	P = Push		L = Old Steel
170 = 170cm	366 = 366cm				B = Bluetooth		R = Old Copper
198 = 198cm	394 = 394cm						M = White Marble
226 = 226cm	422 = 422cm						
450 = 450cm							







S

</ SIGMA >

SIGMA Ceiling



SIGMA Ceiling LED PROFILE

'SIGMA' Ceiling is a LED profile luminaire, made of an extruded aluminum, powder-coated with fine matte finish. Designed for ceiling mounting, providing direct light emission through SMD 3W, 360Lm each with individual lenses. Linear louvers available for reduced UGR. Luminaire equipped with the latest generation of well known LED boards, with small color tolerance MacAdam 3. Drivers ON-OFF or dimmable.



Features:

- Available from 21cm to 450cm
- With SMD 3W, 360Lm each with individual lenses
- Available individual lenses 15°,30° and oval 12°*50°
- CRI 80 and optionally 90
- CCT 3000K and 4000K. Optionally 2700K
- On-off or dimmable version (Dali, 0-10V, Push Button and Bluetooth)
- Coming in white, black and gray powder coated and in special decor Old Steel, Old Copper and White Marble
- 5years warranty
- L80 B50 @50.000h (Ta 24°)
- Color consistency <3SDCM



Detail Cover: Dark D

Detail Cover: Louver L

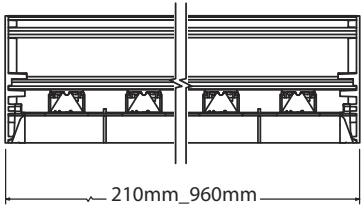


Led Code: SC

Fill in your code using the following items from the table

Length	No of LED	CRI	CCT	Optic	Driver	Cover	Body Colour	Cover Colour
021 = 210mm	4 = 210mm-4Led-12W-1440Lm	8 = 80	27 = 2700	N = 15°	O = On/Off	D = Dark	W = White	B = Black
040 = 400mm	8 = 400mm-8Led-24W-2880Lm	9 = 90	30 = 3000K	R = 30°	D = Dali	L = Louver	B = Black	O = Gold
092 = 920mm	10 = 920mm-10Led-30W-3600Lm		40 = 4000K	O = Oval 12°_50°	V = 0-10V		G = Grey	C= Cooper
096 = 960mm					P = Push		L = Old Steel	
					B = Bluetooth		R = Old Copper	
							M =White Marble	



SIGMA Recessed

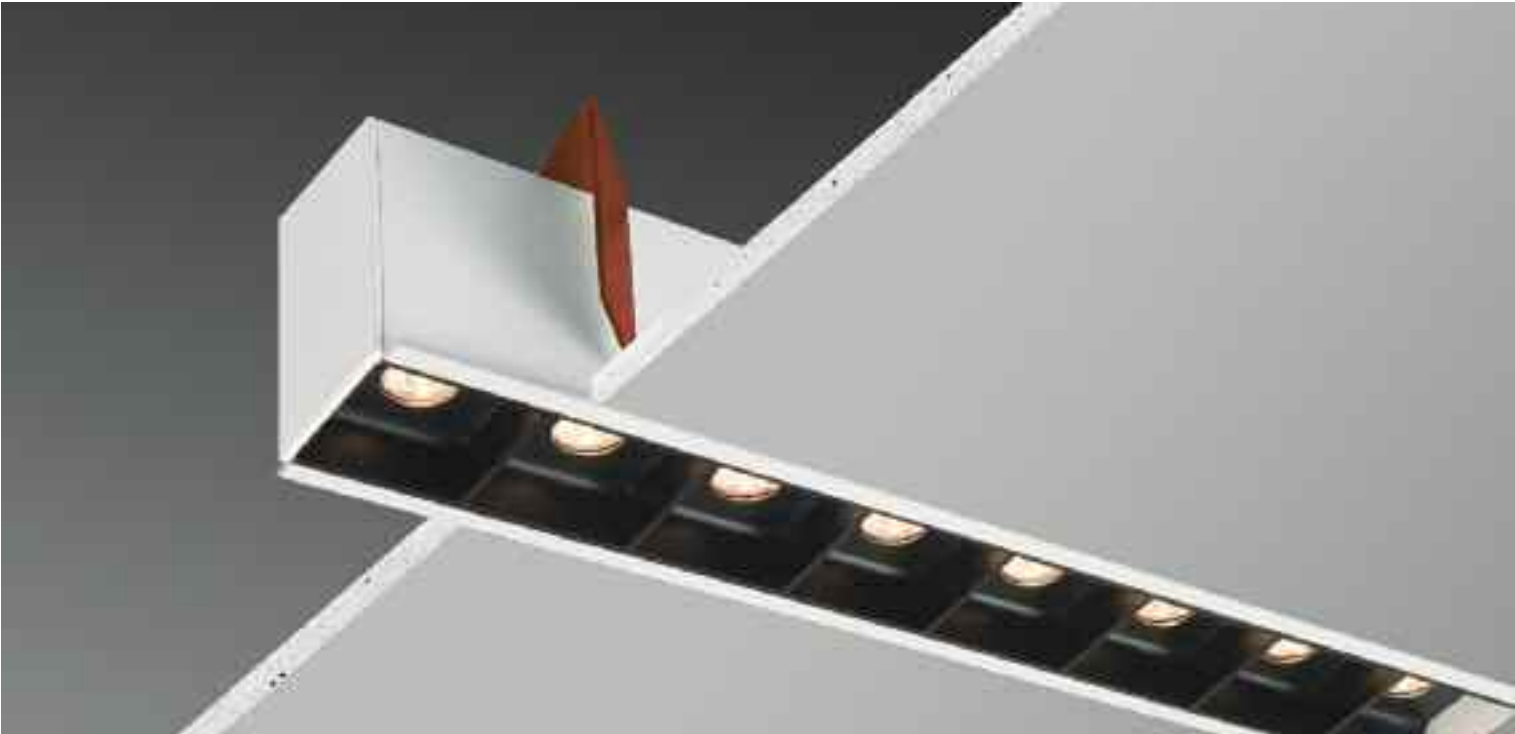


SIGMA Recessed LED PROFILE

'SIGMA' Recessed is a LED profile luminaire, made of an extruded aluminum, powder-coated with fine matte finish. Designed for recessed mounting with 8mm frame, providing direct light emission through SMD 3W, 360Lm each with individual lenses. Linear louvers available for reduced UGR. Luminaire equipped with the latest generation of well known LED boards, with small color tolerance MacAdam 3. Drivers ON-OFF or dimmable.





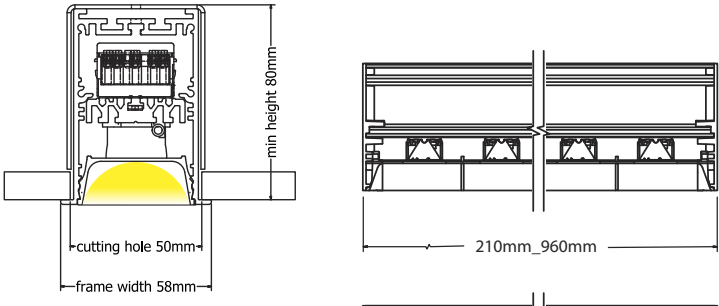




Features:

- Available from 21cm to 450cm
- With SMD 3W, 360Lm each with individual lenses
- Available individual lenses 15°,30° and oval 12°*50°
- CRI 80 and optionally 90
- CCT 3000K and 4000K. Optionally 2700K
- With linear lenses 30°, symmetrical or double asymmetrical angle beam
- On-off or dimmable version (Dali, 0-10V, Push Button and Bluetooth)
- Coming in white, black and gray powder coated
- 5years warranty
- L80 B50 @50.000h (Ta 24°)
- Color consistency <3SDCM




Led Code: **SR**         

Fill in your code using the following items from the table

								
Length	No of LED	CRI	CCT	Optic	Driver	Cover	Body Colour	Cover Colour
021 = 210mm	4 = 210mm-4Led-12W-1440Lm	8 = 80	27 = 2700	N = 15°	O = On/Off	D = Dark	W = White	B = Black
040 = 400mm	8 = 400mm-8Led-24W-2880Lm	9 = 90	30 = 3000K	R = 30°	D = Dali	L = Louver	B = Black	O = Gold
092 = 920mm	10 = 920mm-10Led-30W-3600Lm		40 = 4000K	O = Oval 12°_50°	V = 0-10V		G = Grey	C = Cooper
096 = 960mm					P = Push			
					B = Bluetooth			



SIGMA Trimless

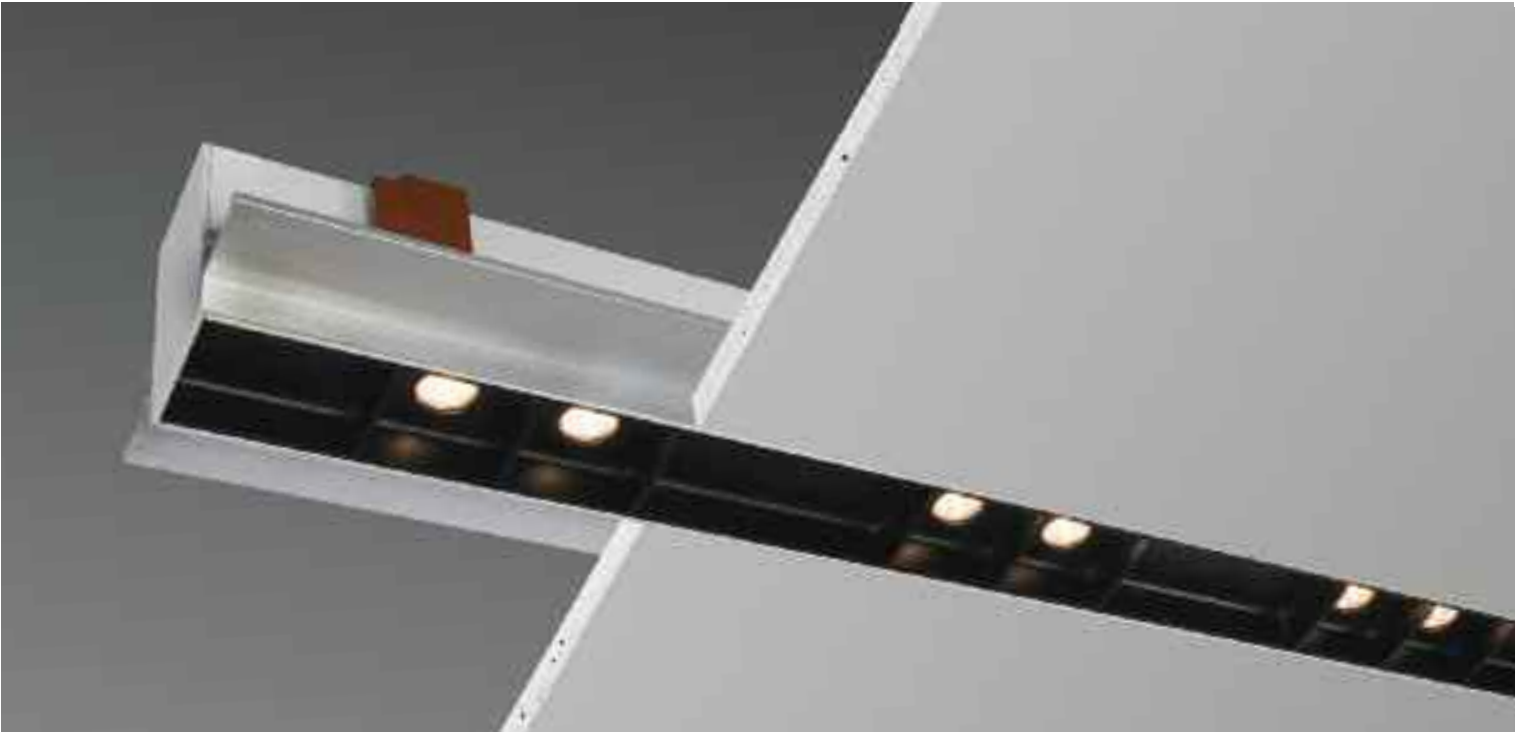

SIGMA Trimless LED PROFILE

'SIGMA' Trimless is a LED profile luminaire, made of an extruded aluminum, powder-coated with fine matte finish. Designed for recessed mounting without frame, providing direct light emission through SMD 3W, 360Lm each with individual lenses. Linear louvers available for reduced UGR. Luminaire equipped with the latest generation of well known LED boards, with small color tolerance MacAdam 3. Drivers ON-OFF or dimmable..


Features:

- Available from 21cm to 450cm
- With SMD 3W, 360Lm each with individual lenses
- Available individual lenses 15°,30° and oval 12*50°
- CRI 80 and optionally 90
- CCT 3000K and 4000K. Optionally 2700K
- With linear lenses 30°, symmetrical or double asymmetrical angle beam
- On-off or dimmable version (Dali, 0-10V, Push Button and Bluetooth)
- Coming in white, black and gray powder coated
- 5years warranty
- L80 B50 @50.000h (Ta 24°)
- Color consistency <3SDCM

Led Code: **ST** ◀ ▶ ◉ ▲ ■ ● ◇ ▬ ⤴ ⤵

Fill in your code using the following items from the table

◀ ▶	◉	▲	■	●	◇	▬	⤴	⤵
Length	No of LED	CRI	CCT	Optic	Driver	Cover	Body Colour	Cover Colour
021 = 210mm	4 = 210mm-4Led-12W-1440Lm	8 = 80	27 = 2700	N = 15°	O = On/Off	D = Dark	W = White	B = Black
040 = 400mm	8 = 400mm-8Led-24W-2880Lm	9 = 90	30 = 3000K	R = 30°	D = Dali	L = Louver	B = Black	O = Gold
092 = 920mm	10 = 920mm-10Led-30W-3600Lm		40 = 4000K	O = Oval 12°_50°	V = 0-10V		G = Grey	C = Cooper
096 = 960mm					P = Push			
					B = Bluetooth			

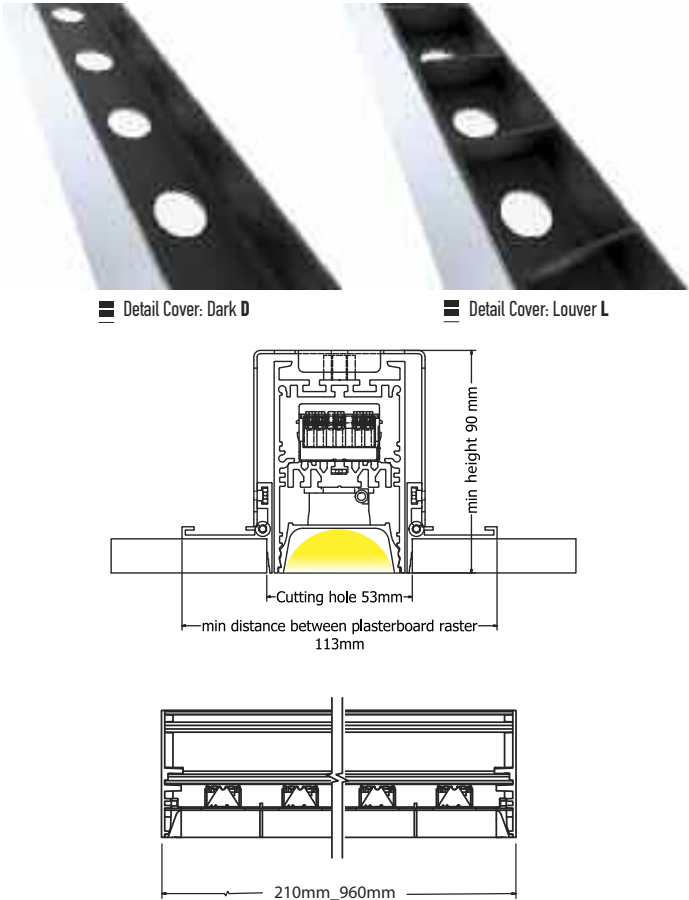



SIGMA Pendant




SIGMA Pendant LED PROFILE

'SIGMA' Pendant is a LED profile luminaire, made of an extruded aluminum, powder-coated with fine matte finish. Designed for ceiling pendant mounting, providing direct light emission through SMD 3W, 360Lm each with individual lenses. Linear louvers available for reduced UGR. Luminaire equipped with the latest generation of well known LED boards, with small color tolerance MacAdam 3. Drivers ON-OFF or dimmable.







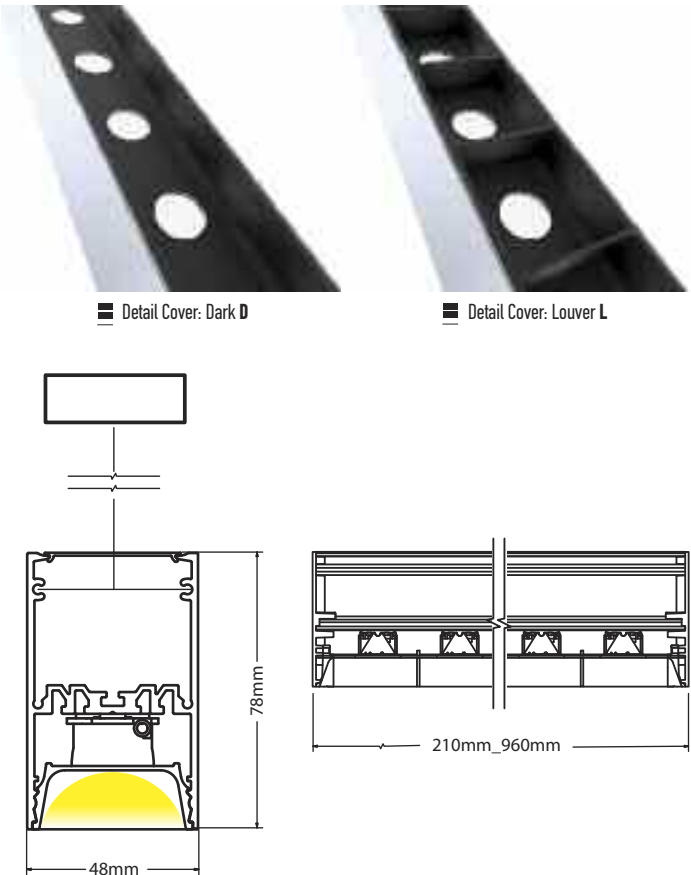


Features:


- Available from 21cm to 450cm
- With SMD 3W, 360Lm each with individual lenses
- Available individual lenses 15°,30° and oval 12°*50°
- CRI 80 and optionally 90
- CCT 3000K and 4000K. Optionally 2700K
- On-off or dimmable version (Dali, 0-10V, Push Button and Bluetooth)
- Coming in white, black and gray powder coated and in special decor Old Steel, Old Copper and White Marble
- 5years warranty
- L80 B50 @50.000h (Ta 24°)
- Color consistency <3SDCM

Led Code: **SP**         



Fill in your code using the following items from the table

								
Length	No of LED	CRI	CCT	Optic	Driver	Cover	Body Colour	Cover Colour
021 = 210mm	4 = 210mm-4Led-12W-1440Lm	8 = 80	27 = 2700	N = 15°	O = On/Off	D = Dark	W = White	B = Black
040 = 400mm	8 = 400mm-8Led-24W-2880Lm	9 = 90	30 = 3000K	R = 30°	D = Dali	L = Louver	B = Black	O = Gold
092 = 920mm	10 = 920mm-10Led-30W-3600Lm		40 = 4000K	O = Oval 12°_50°	V = 0-10V		G = Grey	C= Cooper
096 = 960mm					P = Push		L = Old Steel	
					B = Bluetooth		R = Old Copper	
							M =White Marble	

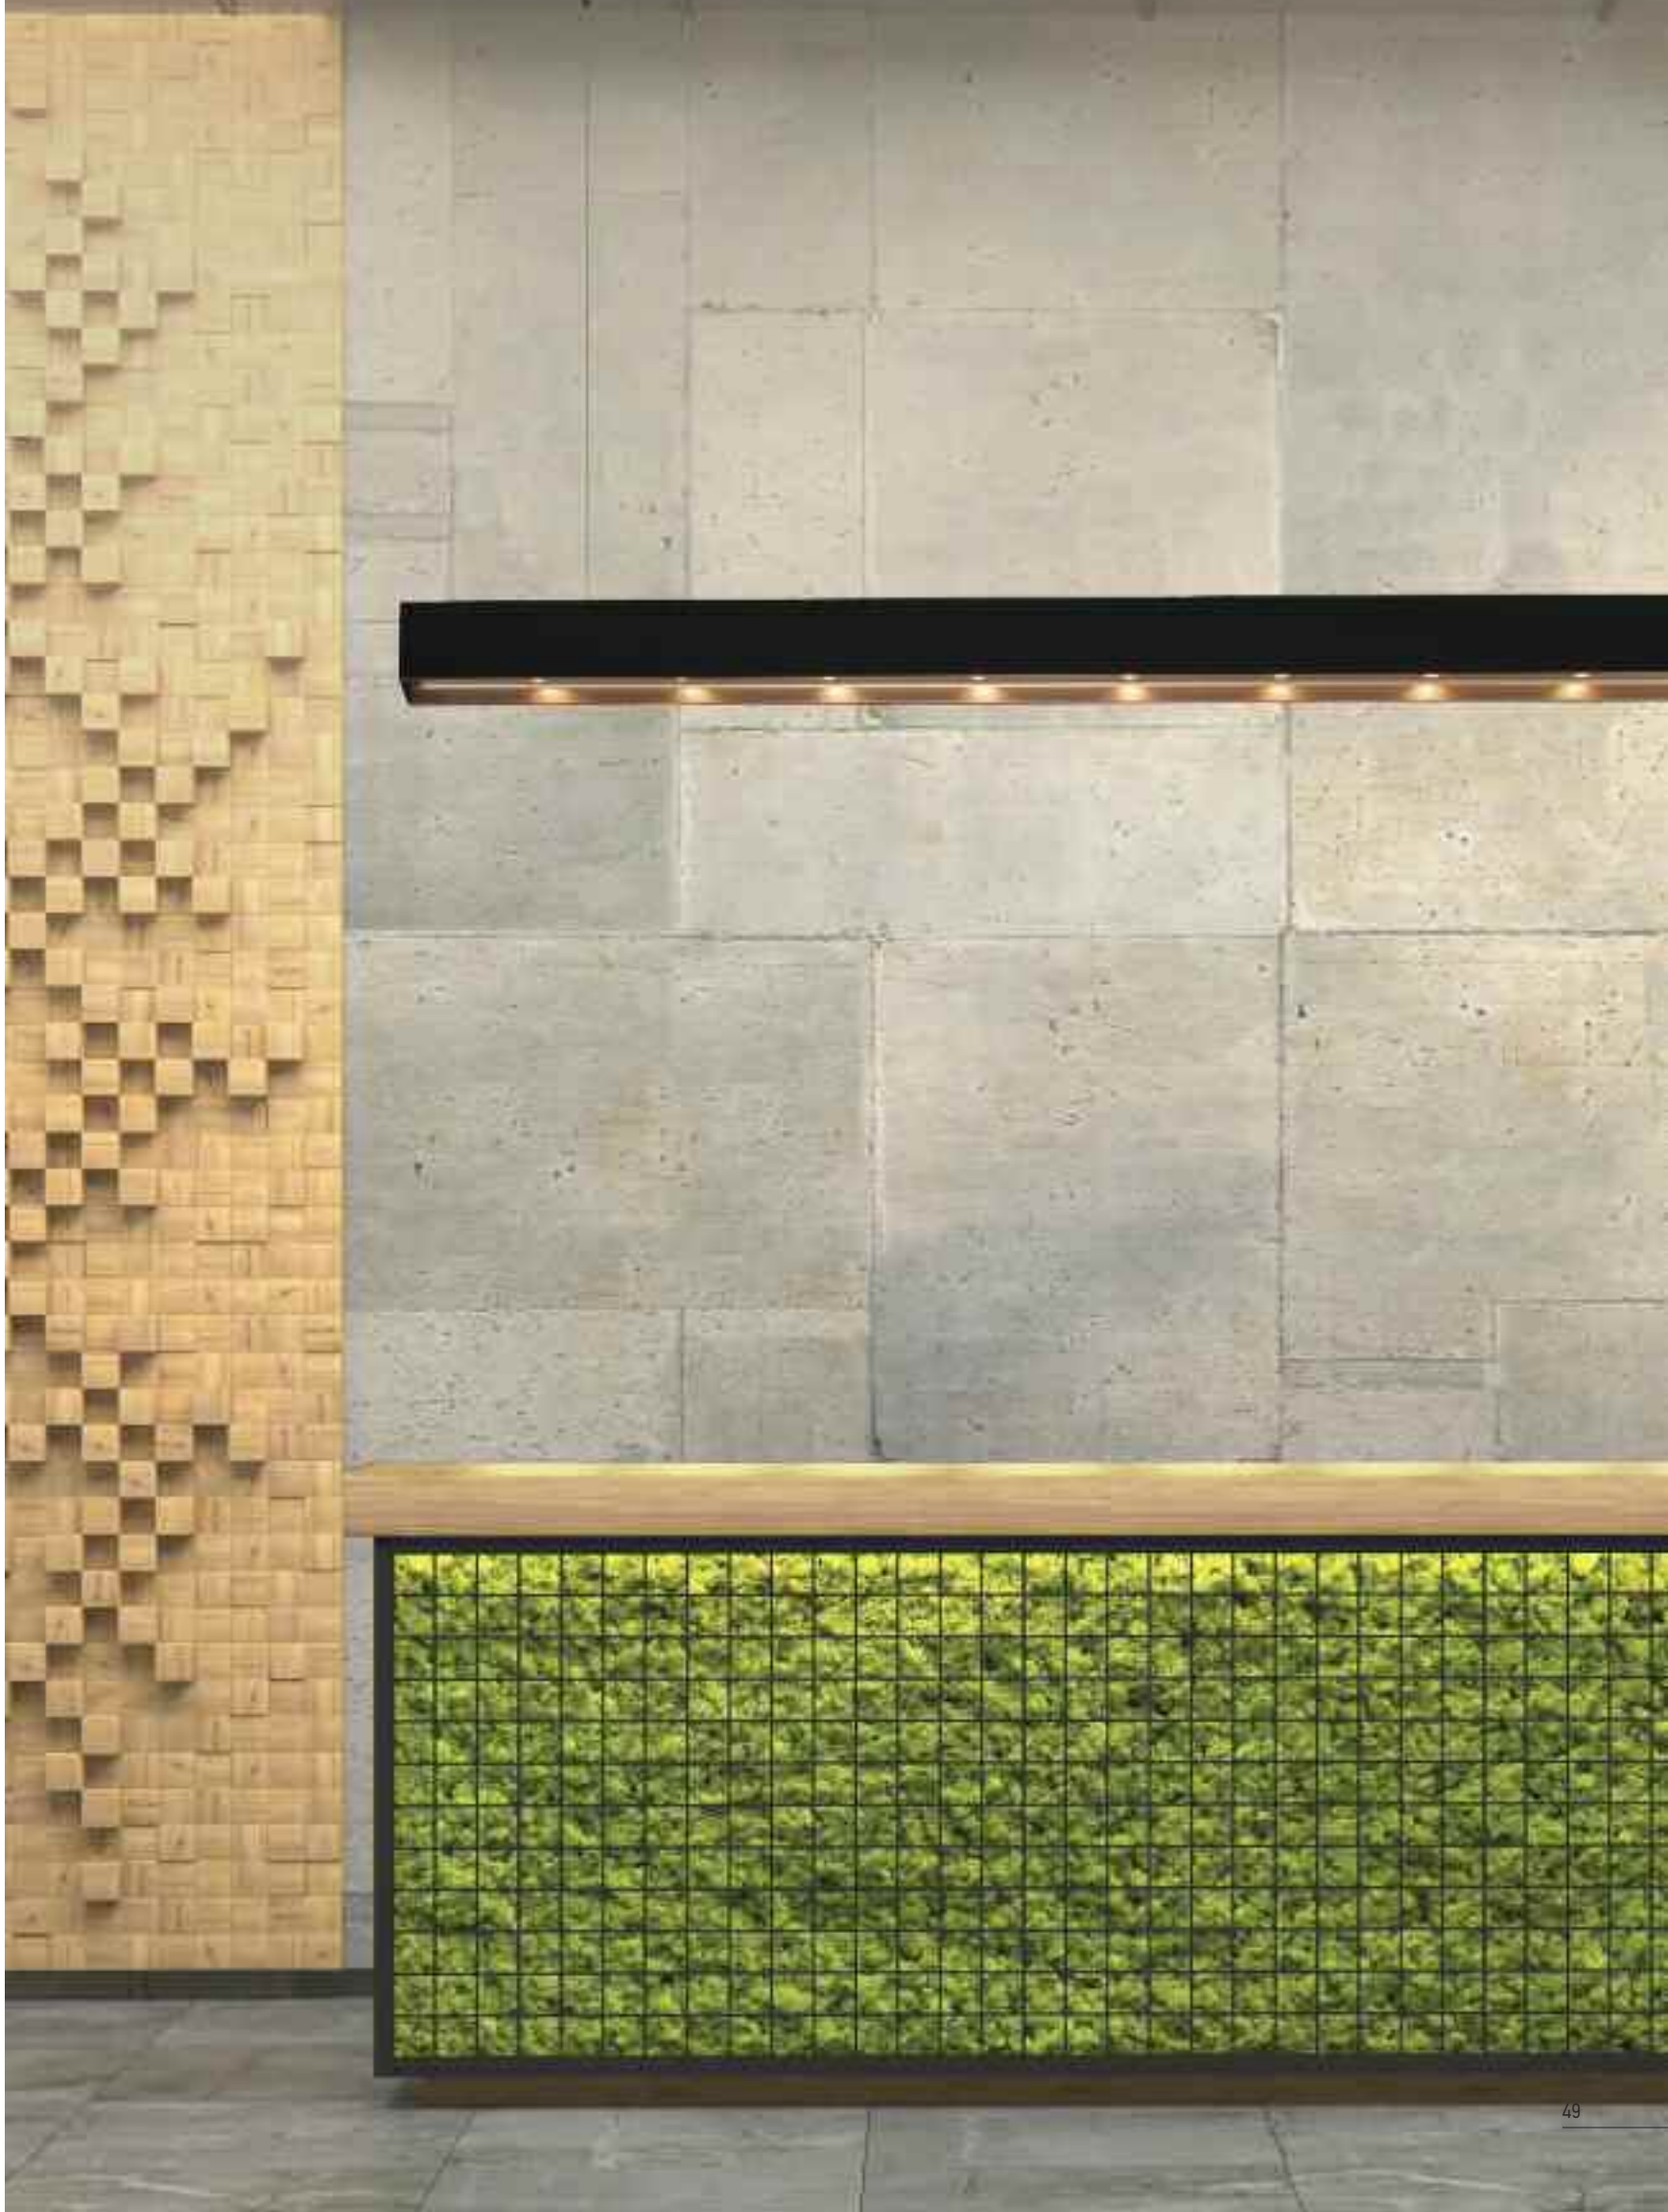

SIGMA Up&Down



SIGMA Up&Down LED PROFILE

'SIGMA' Up&Down is a LED profile luminaire, made of an extruded aluminum, powder-coated with fine matte finish. Designed for ceiling pendant mounting, providing direct and indirect light emission SMD 3W, 360Lm each with individual lenses. Linear louvers available for reduced UGR. Luminaire equipped with the latest generation of well known LED boards, with small color tolerance MacAdam 3. Drivers ON-OFF or dimmable.

Features:


- Available from 21cm to 450cm
- With SMD 3W, 360Lm each with individual lenses
- Available individual lenses 15°,30° and oval 12°*50°
- CRI 80 and optionally 90
- CCT 3000K and 4000K. Optionally 2700K
- On-off or dimmable version (Dali, 0-10V, Push Button and Bluetooth)
- Coming in white, black and gray powder coated and in special decorOld Steel, Old Copper and White Marble
- 5years warranty
- L80 B50 @50.000h (Ta 24°)
- Color consistency <3SDCM
- Seamless and continuous light

Led Code: **SU** ◀ ▶ ☉ ☿ ▲ ■ ● ◇ ▬ ⚙ ⚙



Detail Cover: Dark **D**

Detail Cover: Louver **L**

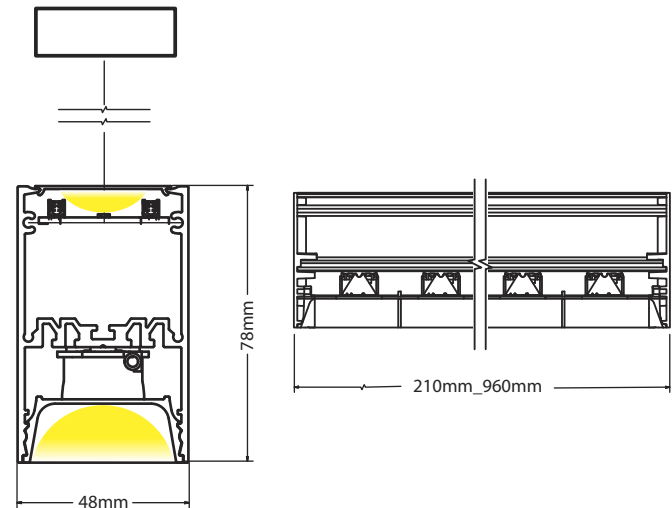

Fill in your code using the following items from the table

◀ ▶	☉	☿	▲	■	●	◇	▬	⚙	⚙
Length	No of LED	Up&Down_Inset	CRI	CCT	Optic	Driver	Cover	Body Colour	Cover Colour
021 = 210mm	4 = 210mm-4Led-12W-1440Lm	1 = HE 2700Lm/mtr	8 = 80	27 = 2700	N = 15°	O = On/Off	D = Dark	W = White	B = Black
040 = 400mm	8 = 400mm-8Led-24W-2880Lm	150Lm/W	9 = 90	30 = 3000K	R = 30°	D = Dali	L = Louver	B = Black	O = Gold
092 = 920mm	10 = 920mm-10Led-30W-3600Lm	2 = HO 4500Lm/mtr		40 = 4000K	O = Oval 12°_50°	V = 0-10V		G = Grey	C = Cooper
096 = 960mm		144Lm/W				P = Push		L = Old Steel	
						B = Bluetooth		R = Old Copper	
								M =White Marble	







K

</ KAPPA >

KAPPA Ceiling



KAPPA Ceiling LED PROFILE

'KAPPA' Ceiling is a LED profile luminaire, made of an extruded aluminum, powder-coated with fine matte finish. Designed for ceiling mounting, providing direct light emission through COB LED 9W, 1400Lm each with individual reflectors. With two versions dark light parts for reduced UGR. Luminaire equipped with the latest generation of well known LED boards, with small color tolerance MacAdam 3. Drivers ON-OFF or dimmable.

Features:

- Available from 16cm to 450cm
- COB LED 9W, 1400Lm each with individual reflectors
- Available individual reflectors 24°, 38°
- CRI 80 and optionally 90
- CCT 3000K and 4000K. Optionally 2700K and 6500K
- On-off or dimmable version (Dali, 0-10V, Push Button and Bluetooth)
- Coming in white, black and gray powder coated and in special decor Old Steel, Old Copper and White Marble
- 5years warranty
- L80 B50 @50.000h (Ta 24°)
- Color consistency <3SDCM

Led Code: **KC** ◀ ▶ ☉ ▲ ■ ● ◇ ▬ 🧑 🧑



Fill in your code using the following items from the table

◀ ▶	☉	▲	■	●	◇	▬	🧑	🧑
Length	No of LED	CRI	CCT	Optic	Driver	Cover	Body Colour	Cover Colour
016 = 160mm	2 = 160mm-2Led-18W-2800Lm	8 = 80	27 = 2700	N = 24°	O = On/Off	E = Deep	W = White	B = Black
032 = 320mm	4 = 320mm-4Led-36W-5600Lm	9 = 90	30 = 3000K	R = 38°	D = Dali	C = Cylinder	B = Black	O = Gold
064 = 640mm	8 = 640mm-8Led-72W-11200Lm		40 = 4000K		V = 0-10V		G = Grey	C = Cooper
088 = 880mm	10 = 880mm-10Led-90W-14000Lm				P = Push		L = Old Steel	
					B = Bluetooth		R = Old Copper	
							M =White Marble	




Detail Cover: Cylinder **C**

Detail Cover: Deep **E**

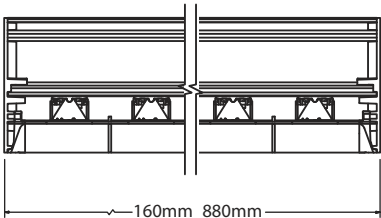



KAPPA Recessed

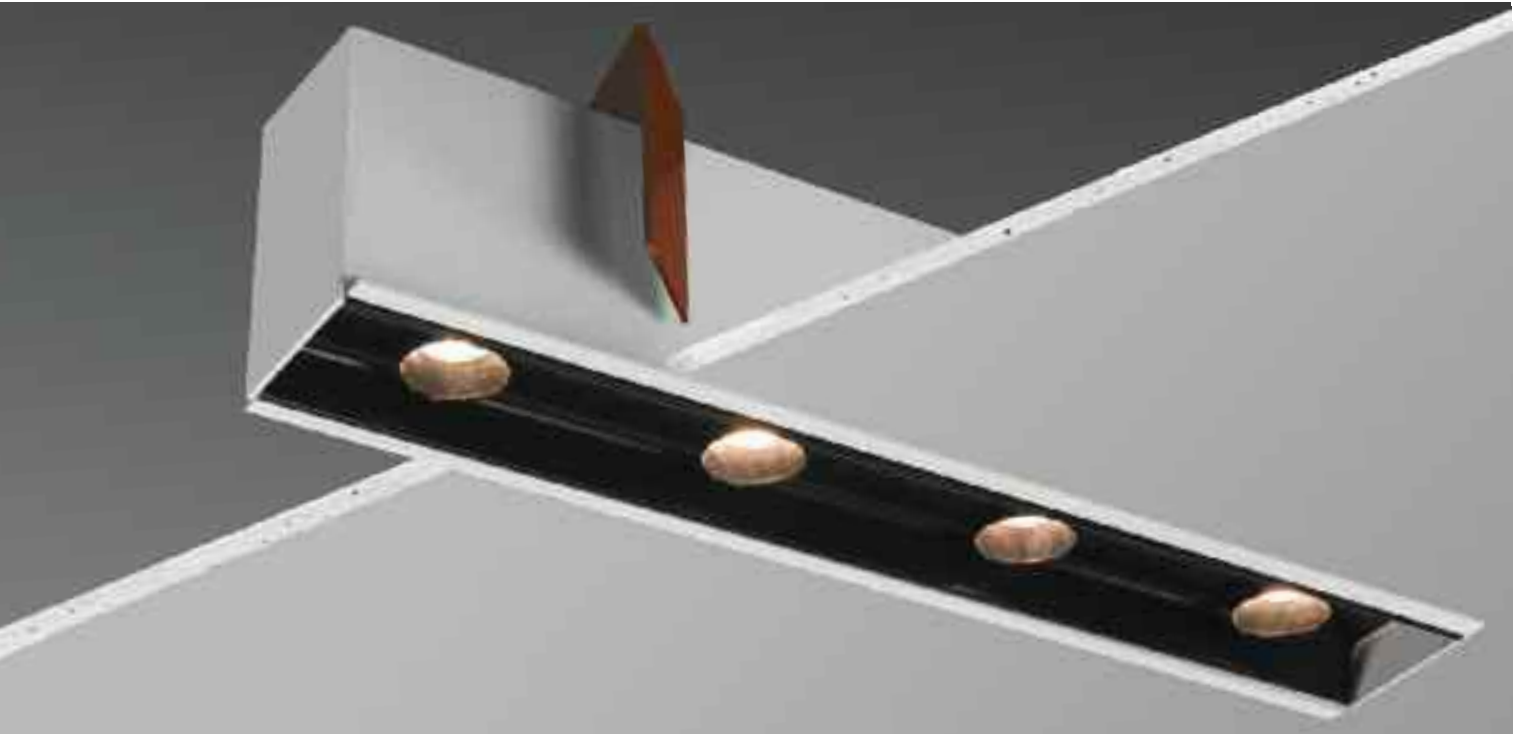

KAPPA Recessed LED PROFILE

'KAPPA' Recessed is a LED profile luminaire, made of an extruded aluminum, powder-coated with fine matte finish. Designed for recessed mounting with 8mm frame, providing direct light emission through COB LED 9W, 1400Lm each with individual reflectors. With two versions dark light parts for reduced UGR. Luminaire equipped with the latest generation of well known LED boards, with small color tolerance MacAdam 3. Drivers ON-OFF or dimmable.

Features:

- Available from 16cm to 450cm
- COB LED 9W, 1400Lm each with individual reflectors
- Available individual reflectors 24°, 38°
- CRI 80 and optionally 90
- CCT 3000K and 4000K. Optionally 2700K and 6500K
- On-off or dimmable version (Dali, 0-10V, Push Button and Bluetooth)
- Coming in white, black and gray powder coated
- 5years warranty
- L80 B50 @50.000h (Ta 24°)
- Color consistency <3SDCM



Led Code: KR         







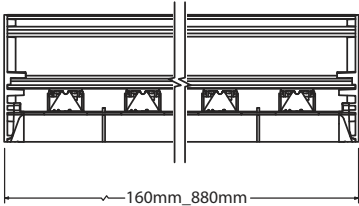


Fill in your code using the following items from the table



Detail Cover: Cylinder C

Detail Cover: Deep E



								
Length	No of LED	CRI	CCT	Optic	Driver	Cover	Body Colour	Cover Colour
016 = 160mm	2 = 160mm-2Led-18W-2800Lm	8 = 80	27 = 2700	N = 24°	O = On/Off	E = Deep	W = White	B = Black
032 = 320mm	4 = 320mm-4Led-36W-5600Lm	9 = 90	30 = 3000K	R = 38°	D = Dali	C = Cylinder	B = Black	O = Gold
064 = 640mm	8 = 640mm-8Led-72W-11200Lm		40 = 4000K		V = 0-10V		G = Grey	C = Cooper
088 = 880mm	10 = 880mm-10Led-90W-14000Lm				P = Push			
					B = Bluetooth			



KAPPA Trimless



KAPPA Trimless LED PROFILE

'KAPPA' Trimless is a LED profile luminaire, made of an extruded aluminum, powder-coated with fine matte finish. Designed for recessed mounting without frame, providing direct light emission through COB LED 9W, 1400Lm each with individual reflectors. With two versions dark light parts for reduced UGR. Luminaire equipped with the latest generation of well known LED boards, with small color tolerance MacAdam 3. Drivers ON-OFF or dimmable.

Features:

- Available from 16cm to 450cm
- COB LED 9W, 1400Lm each with individual reflectors
- Available individual reflectors 24°, 38°
- CRI 80 and optionally 90
- CCT 3000K and 4000K. Optionally 2700K and 6500K
- On-off or dimmable version (Dali, 0-10V, Push Button and Bluetooth)
- Coming in white, black and gray powder coated
- 5years warranty
- L80 B50 @50.000h (Ta 24°)
- Color consistency <3SDCM

Led Code: **KT** ◀ ▶ ☉ ▲ ■ ● ◇ ▬ 👤 👤



Fill in your code using the following items from the table

◀ ▶	☉	▲	■	●	◇	▬	👤	👤
Length	No of LED	CRI	CCT	Optic	Driver	Cover	Body Colour	Cover Colour
016 = 160mm	2 = 160mm-2Led-18W-2800Lm	8 = 80	27 = 2700	N = 24°	O = On/Off	E = Deep	W = White	B = Black
032 = 320mm	4 = 320mm-4Led-36W-5600Lm	9 = 90	30 = 3000K	R = 38°	D = Dali	C = Cylinder	B = Black	O = Gold
064 = 640mm	8 = 640mm-8Led-72W-11200Lm		40 = 4000K		V = 0-10V		G = Grey	C= Cooper
088 = 880mm	10 = 880mm-10Led-90W-14000Lm				P = Push			
					B = Bluetooth			



▬ Detail Cover: Cylinder C

▬ Detail Cover: Deep E

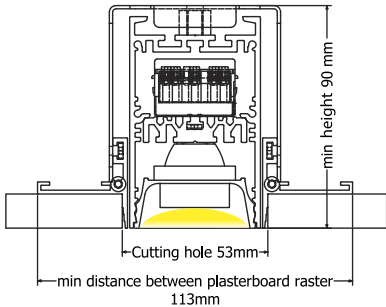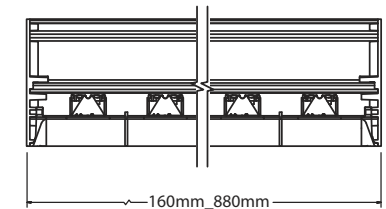



KAPPA Pendant



KAPPA Pendant LED PROFILE


'KAPPA' Pendant is a LED profile luminaire, made of an extruded aluminum, powder-coated with fine matte finish. Designed for ceiling pendant mounting, providing direct light emission through COB LED 9W, 1400Lm each with individual reflectors. With two versions dark light parts for reduced UGR. Luminaire equipped with the latest generation of well known LED boards, with small color tolerance MacAdam 3. Drivers ON-OFF or dimmable.

Features:

- Available from 16cm to 450cm
- COB LED 9W, 1400Lm each with individual reflectors
- Available individual reflectors 24°, 38°
- CRI 80 and optionally 90
- CCT 3000K and 4000K. Optionally 2700K and 6500K
- On-off or dimmable version (Dali, 0-10V, Push Button and Bluetooth)
- Coming in white, black and gray powder coated and in special decor Old Steel, Old Copper and White Marble
- 5years warranty
- L80 B50 @50.000h (Ta 24°)
- Color consistency <3SDCM

Led Code: **KP** ◀ ▶ ☉ ▲ ■ ● ◇ ▬ ⤴ ⤵

Fill in your code using the following items from the table

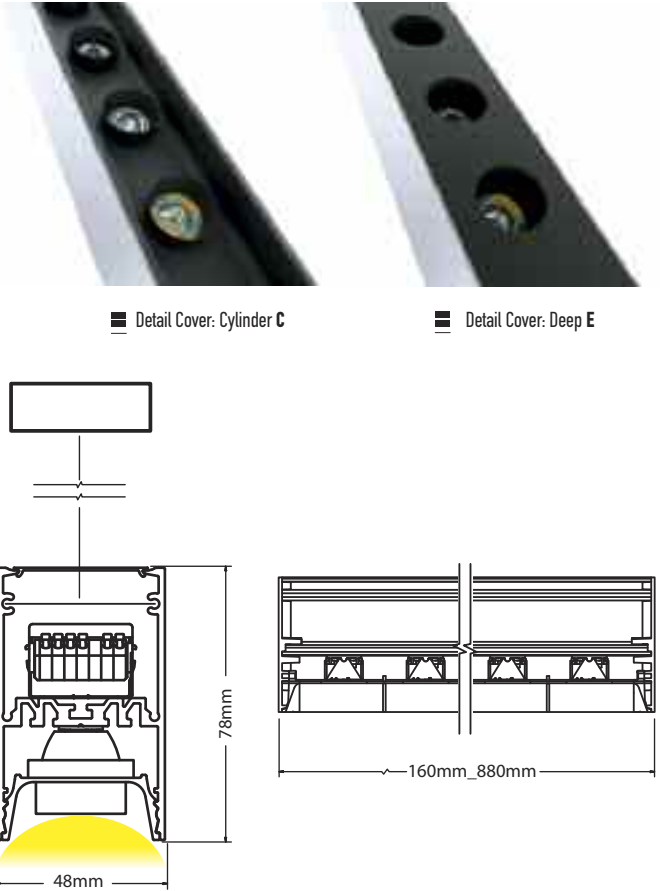

◀ ▶	☉	▲	■	●	◇	▬	⤴ ⤵	⤴ ⤵
Length	No of LED	CRI	CCT	Optic	Driver	Cover	Body Colour	Cover Colour
016 = 160mm	2 = 160mm-2Led-18W-2800Lm	8 = 80	27 = 2700	N = 24°	O = On/Off	E = Deep	W = White	B = Black
032 = 320mm	4 = 320mm-4Led-36W-5600Lm	9 = 90	30 = 3000K	R = 38°	D = Dali	C = Cylinder	B = Black	O = Gold
064 = 640mm	8 = 640mm-8Led-72W-11200Lm		40 = 4000K		V = 0-10V		G = Grey	C= Cooper
088 = 880mm	10 = 880mm-10Led-90W-14000Lm				P = Push		L = Old Steel	
					B = Bluetooth		R = Old Copper	
							M =White Marble	



KAPPA Up&Down



KAPPA Up&Down LED PROFILE

'KAPPA' Up&Down is a LED profile luminaire, made of an extruded aluminum, powder-coated with fine matte finish. Designed for ceiling pendant mounting, providing direct and indirect light emission through COB LED 9W, 1400Lm each with individual reflectors. With two versions dark light parts for reduced UGR. Luminaire equipped with the latest generation of well known LED boards, with small color tolerance MacAdam 3. Drivers ON-OFF or dimmable.


Features:

- Available from 16cm to 450cm
- COB LED 9W, 1400Lm each with individual reflectors
- Available individual reflectors 24°, 38°
- CRI 80 and optionally 90
- CCT 3000K and 4000K. Optionally 2700K and 6500K
- On-off or dimmable version (Dali, 0-10V, Push Button and Bluetooth)
- Coming in white, black and gray powder coated and in special decor Old Steel, Old Copper and White Marble
- 5years warranty
- L80 B50 @50.000h (Ta 24°)
- Color consistency <3SDCM



Detail Cover: Cylinder C

Detail Cover: Deep E

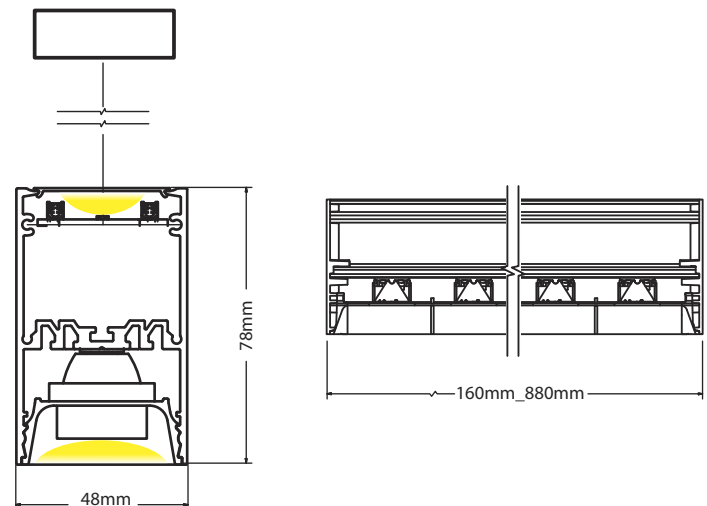

Led Code: **KU**

Fill in your code using the following items from the table

Length	No of LED	Up&Down_Inset	CRi	CCT	Optic	Driver	Cover	Body Colour	Cover Colour
016 = 160mm	2 = 160mm-2Led-18W-2800Lm	1 = HE 2700Lm/mtr 150Lm/W	8 = 80 9 = 90	27 = 2700 30 = 3000K 40 = 4000K	N = 24° R = 38°	O = On/Off D = Dali V = 0-10V P = Push B = Bluetooth	D = Dark L = Louver	W = White B = Black G = Grey L = Old Steel R = Old Copper M = White Marble	B = Black O = Gold C = Cooper
032 = 320mm	4 = 320mm-4Led-36W-5600Lm								
064 = 640mm	8 = 640mm-8Led-72W-11200Lm	2 = HO 4500Lm/mtr 144Lm/W							
088 = 880mm	10 = 880mm-10Led-90W-14000Lm								





PROFILES

EPSILON



Epsilon PROFILE

Tender text:

'Epsilon' is a LED profile, made of an extruded aluminum, powder-coated with fine matte finish.

Incorporated 3phase Track with 'ready to plug' power supply.

Designed for ceiling, recessed, trimless and pendant installation.

Coming in white, black and gray powder coated and in special decor Old Steel, Old Copper and White Marble.

Available from 50 cm to 300 cm

Epsilon Ceiling / Recessed / Trimless / Pendant

Led Code: ? ↔ ⤴

Fill in your code using the following items from the table

<u>?</u>	<u>↔</u>	<u>⤴</u>
Led Code	Length	Body Colour
EC = Epsilon Ceiling	05 = 50cm	W = White
ER = Epsilon Recessed	10 = 100cm	B = Black
ET = Epsilon Trimless	20 = 200cm	G = Grey
EP = Epsilon Pendant	30 = 300cm	L = Old Steel
		R = Old Copper
		M = White Marble

Epsilon Up&Down


Led Code: EU ↔ ⌂ ▲ ■ ⤴

Fill in your code using the following items from the table


<u>↔</u>	<u>⌂</u>	<u>▲</u>	<u>■</u>	<u>⤴</u>
Length	Up&Down_Inset	CRI	CCT	Body Colour
05 = 50cm	1 = HE 2700Lm/mtr 150Lm/W	8 = 80	27 = 2700	W = White
10 = 100cm	2 = HO 4500Lm/mtr 144Lm/W	9 = 90	30 = 3000K	B = Black
20 = 200cm			40 = 4000K	G = Grey
30 = 300cm			65 = 6500K	L = Old Steel
				R = Old Copper
				M = White Marble

EPSILON


E Ceiling




E Recessed




E Trimless

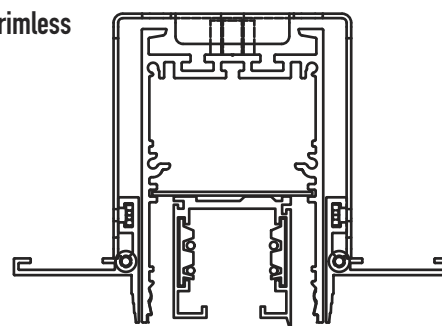


E Pendant

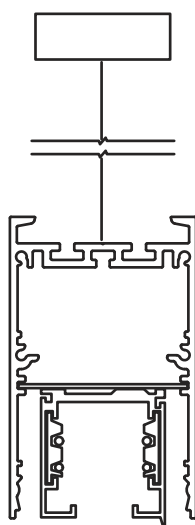

E Up&Down

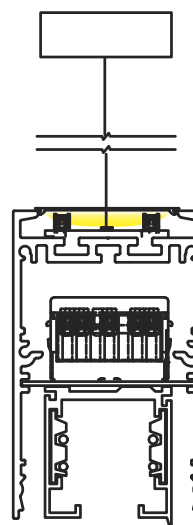

LAMDA

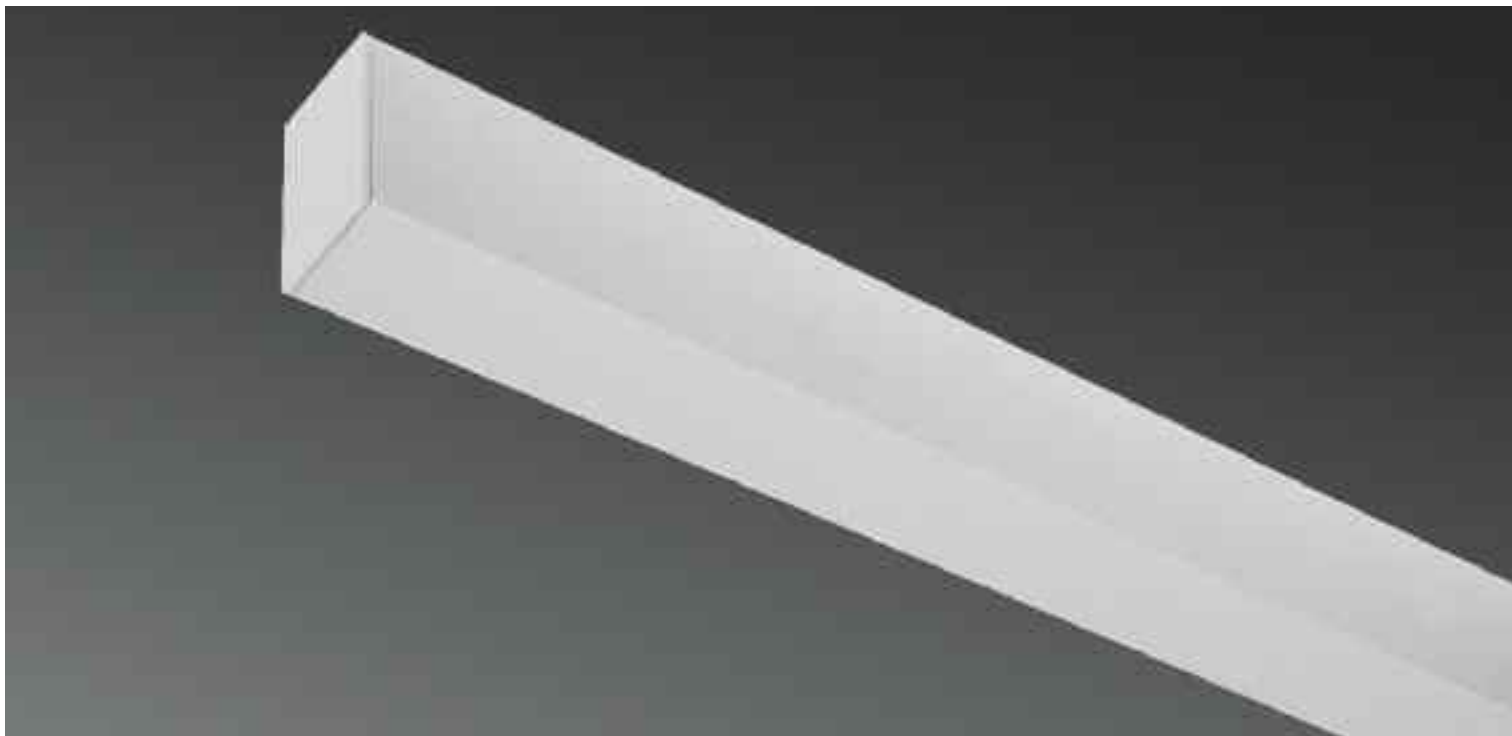

LAMDA PROFILE

'Lamda' is a LED profile, made of an extruded aluminum, powder-coated with fine matte finish.

With flat cover.

Designed for ceiling, recessed, trimless and pendant installation.

Coming in white, black and gray powder coated and in special decor Old Steel, Old Copper and White Marble.

Available from 50 cm to 300 cm

Lamda Ceiling / Recessed / Trimless / Pendant

Led Code: **?** **↔** **▲** **▲**

Fill in your code using the following items from the table

?	↔	▲	▲
Led Code	Length	Body Colour	Cover Colour
LC = Lamda Ceiling	05 = 50cm	W = White	B = Black
LR = Lamda Recessed	10 = 100cm	B = Black	O = Gold
LT = Lamda Trimless	20 = 200cm	G = Grey	C = Cooper
LP = Lamda Pendant	30 = 300cm	L = Old Steel	
		R = Old Copper	
		M = White Marble	

Lamda Up&Down


Led Code: **LU** **↔** **⌂** **▲** **■** **▲** **▲**

Fill in your code using the following items from the table


↔	⌂	▲	■	▲	▲
Length	Up&Down_Inset	CRI	CCT	Body Colour	Cover Colour
05 = 50cm	1 = HE 2700Lm/mtr 150Lm/W	8 = 80	11 = TW	W = White	B = Black
10 = 100cm	2 = HO 4500Lm/mtr 144Lm/W	9 = 90	27 = 2700	B = Black	O = Gold
20 = 200cm			30 = 3000K	G = Grey	C = Cooper
30 = 300cm			40 = 4000K	L = Old Steel	
			65 = 6500K	R = Old Copper	
				M = White Marble	

LAMDA


L Ceiling




L Recessed




L Trimless

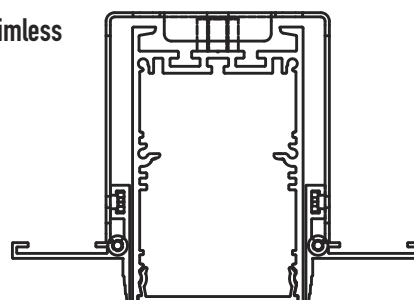

L Pendant

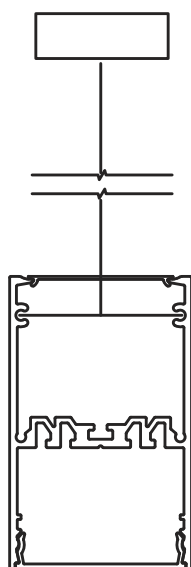

L Up&Down

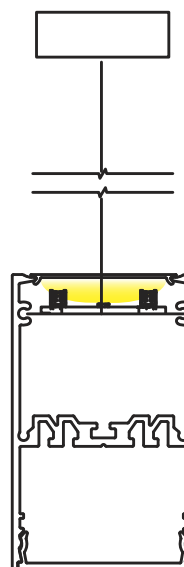

HETA



Heta PROFILE

'Heta' is a LED profile, made of an extruded aluminum, powder-coated with fine matte finish.

With dark cover.

Designed for ceiling, recessed, trimless and pendant installation.

Coming in white, black and gray powder coated and in special decor Old Steel, Old Copper and White Marble.

Available from 50 cm to 300 cm

Heta Ceiling / Recessed / Trimless / Pendant

Led Code: **?** **↔** **⬆** **⬇**

Fill in your code using the following items from the table

?	↔	⬆	⬇
Led Code	Length	Body Colour	Cover Colour
HC = Heta Ceiling	05 = 50cm	W = White	B = Black
HR = Heta Recessed	10 = 100cm	B = Black	O = Gold
HT = Heta Trimless	20 = 200cm	G = Grey	C= Cooper
HP = Heta Pendant	30 = 300cm	L = Old Steel	
		R = Old Copper	
		M =White Marble	

Heta Up&Down


Led Code: **HU** **↔** **⌂** **▲** **■** **⬆** **⬇**

Fill in your code using the following items from the table


↔	⌂	▲	■	⬆	⬇
Length	Up&Down_Inset	CRI	CCT	Body Colour	Cover Colour
05 = 50cm	1 = HE 2700Lm/mtr 150Lm/W	8 = 80	11 = TW	W = White	B = Black
10 = 100cm	2 = HO 4500Lm/mtr 144Lm/W	9 = 90	27 = 2700	B = Black	O = Gold
20 = 200cm			30 = 3000K	G = Grey	C= Cooper
30 = 300cm			40 = 4000K	L = Old Steel	
			65 = 6500K	R = Old Copper	
				M =White Marble	

HETA


H Ceiling




H Recessed




H Trimless

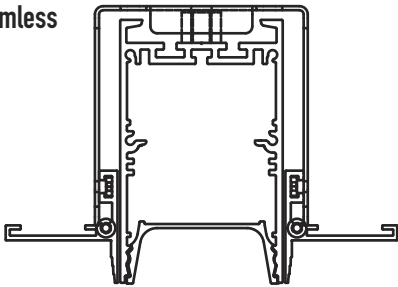

H Pendant

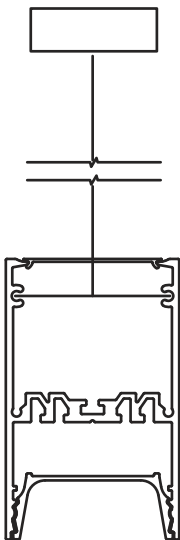

H Up&Down

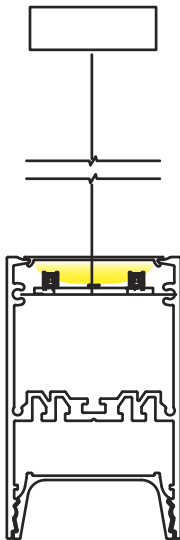

GAMA



GAMA PROFILE

'Gama' is a LED profile, made of an extruded aluminum, powder-coated with fine matte finish.


With dark cover and assembled spotlight.

Designed for ceiling, recessed, trimless and pendant installation.

Coming in white and black powder coated and in special decor Old Steel, Old Copper and White Marble.

Available from 50 cm up to 3000 cm

Selection of different spot light 'Giota' or 'Ypsilon' see page 70

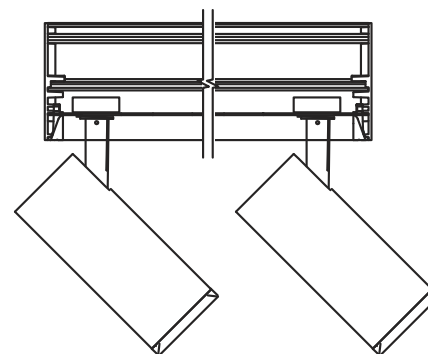

Gama Ceiling / Recessed / Trimless / Pendant

Led Code: ? ◀ ▶ ☉ ⤴ ⤵ ⤶

Fill in your code using the following items from the table

?	◀ ▶	☉	⤴	⤵	⤶
Led Code	Length	No of Spots	Spot Type	Body Colour	Cover Colour
GC = Gama Ceiling	05 = 50cm	1 = 1 Spot	I = Giota	W = White	B = Black
GR = Gama Recessed	10 = 100cm	2 = 2 Spots	Y = Ypsilon	B = Black	O = Gold
GT = Gama Trimless	20 = 200cm	4 = 4 Spots		G = Grey	C = Cooper
GP = Gama Pendant	30 = 300cm	6 = 6 Spots		L = Old Steel	
				R = Old Copper	
				M = White Marble	

Gama Up&Down


Led Code: GU ☉ ⤴ ⤵ ⤶ ▲ ■ ⤴ ⤵

Fill in your code using the following items from the table


◀ ▶	☉	⤴	⤵	▲	■	⤴	⤵
Length	No of Spots	Spot Type	Up&Down_Inset	CRI	CCT	Body Colour	Cover Colour
05 = 50cm	1 = 1 Spot	I = Giota	1 = HE 2700Lm/mtr 150Lm/W	8 = 80	27 = 2700	W = White	B = Black
10 = 100cm	2 = 2 Spots	Y = Ypsilon	2 = HO 4500Lm/mtr 144Lm/W	9 = 90	30 = 3000K	B = Black	O = Gold
20 = 200cm	4 = 4 Spots				40 = 4000K	G = Grey	C = Cooper
30 = 300cm	6 = 6 Spots				65 = 6500K	L = Old Steel	
						R = Old Copper	
						M = White Marble	

GAMA


G Ceiling

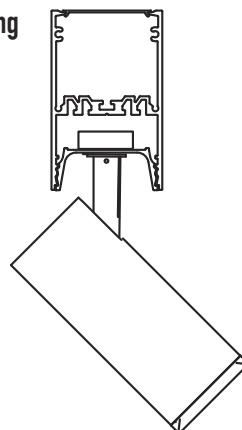


G Recessed

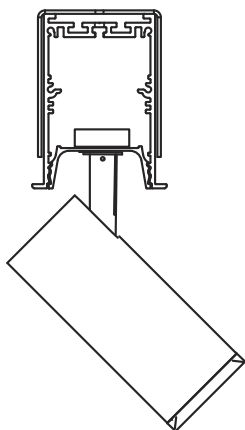


G Trimless

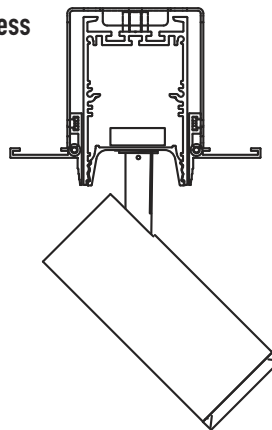

G Pendant

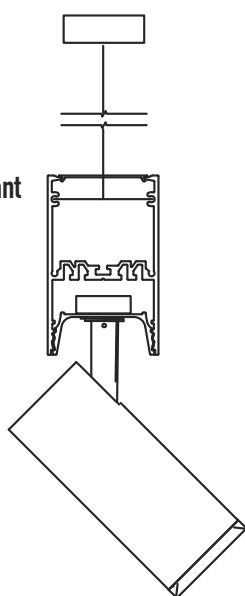


G Up&Down

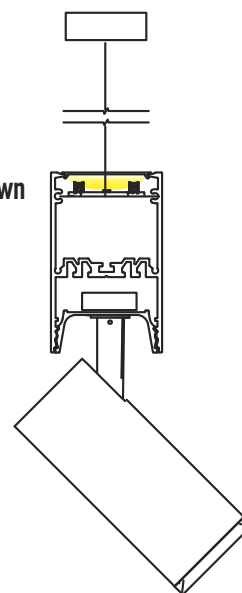



< THITA_
ZITA_XI_ >

THITA Ceiling

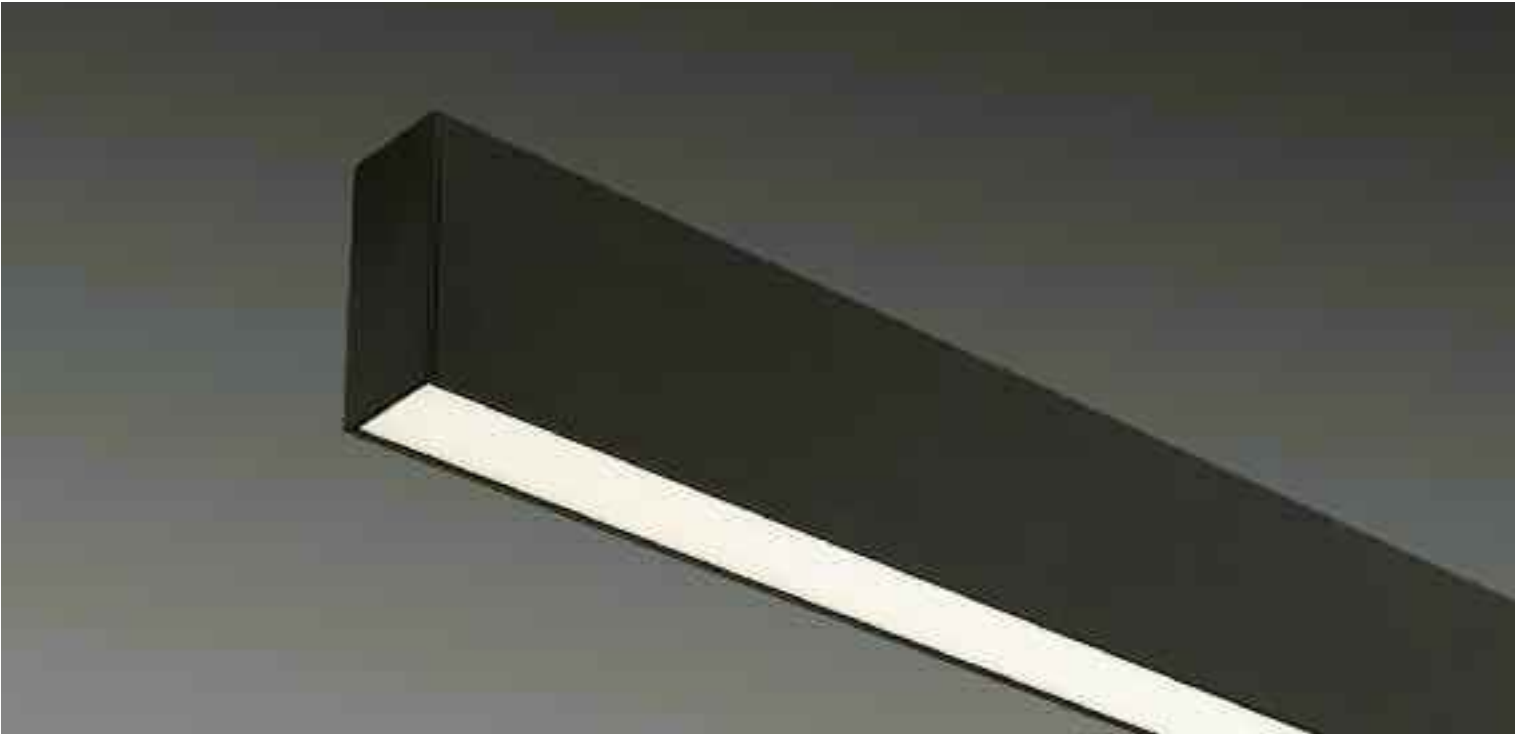


THITA Ceiling LED PROFILE

'THITA' Ceiling is a LED profile luminaire, made of an extruded aluminum, powder-coated with fine matte finish. Designed for ceiling mounting, providing direct light emission through PMMA diffuser. Luminaire equipped with the latest generation of well known LED boards, with small color tolerance MacAdam 3, according to Zhaga book 7. Drivers ON-OFF or dimmable.

Features:

- Available from 58cm to 228cm
- In two different Lumen output types plus tunable white version
- CRI 80 and optionally 90
- CCT 3000K and 4000K. Optionally 2700K and 6500K
- On-off or dimmable version (Dali, Push Button and Bluetooth)
- Coming in white and black powder coated
- 5years warranty
- L80 B50 @50.000h (Ta 24°)
- Color consistency <3SDCM
- Seamless and continuous light

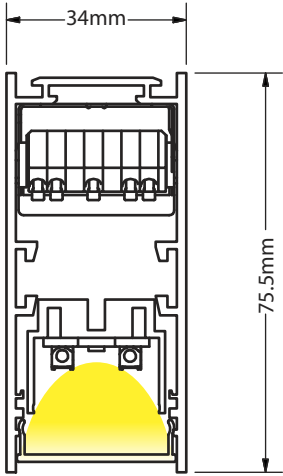

Suspended Kit
Code: **THP**


Led Code: **THC** ◆ ◎ ▲ ■ ◇ ♀

Fill in your code using the following items from the table

◆	◎	▲	■	◇	♀
Length	Inset	CRI	CCT	Driver	Body Colour
058 = 058mm 170 = 170mm	1 = HE 2700Lm/mtr-150Lm/W	8 = 80	11 = TW	O = On/Off	W = White
086 = 086mm 198 = 198mm	2 = HO 4500Lm/mtr-144Lm/W	9 = 90	27 = 2700	D = Dali	B = Black
114 = 114mm 226 = 226mm	4 = TW 4800Lm/mtr-100Lm/W		30 = 3000K	P = Push	
142 = 142mm			40 = 4000K	B = Bluetooth	
			65 = 6500K		



THITA Recessed

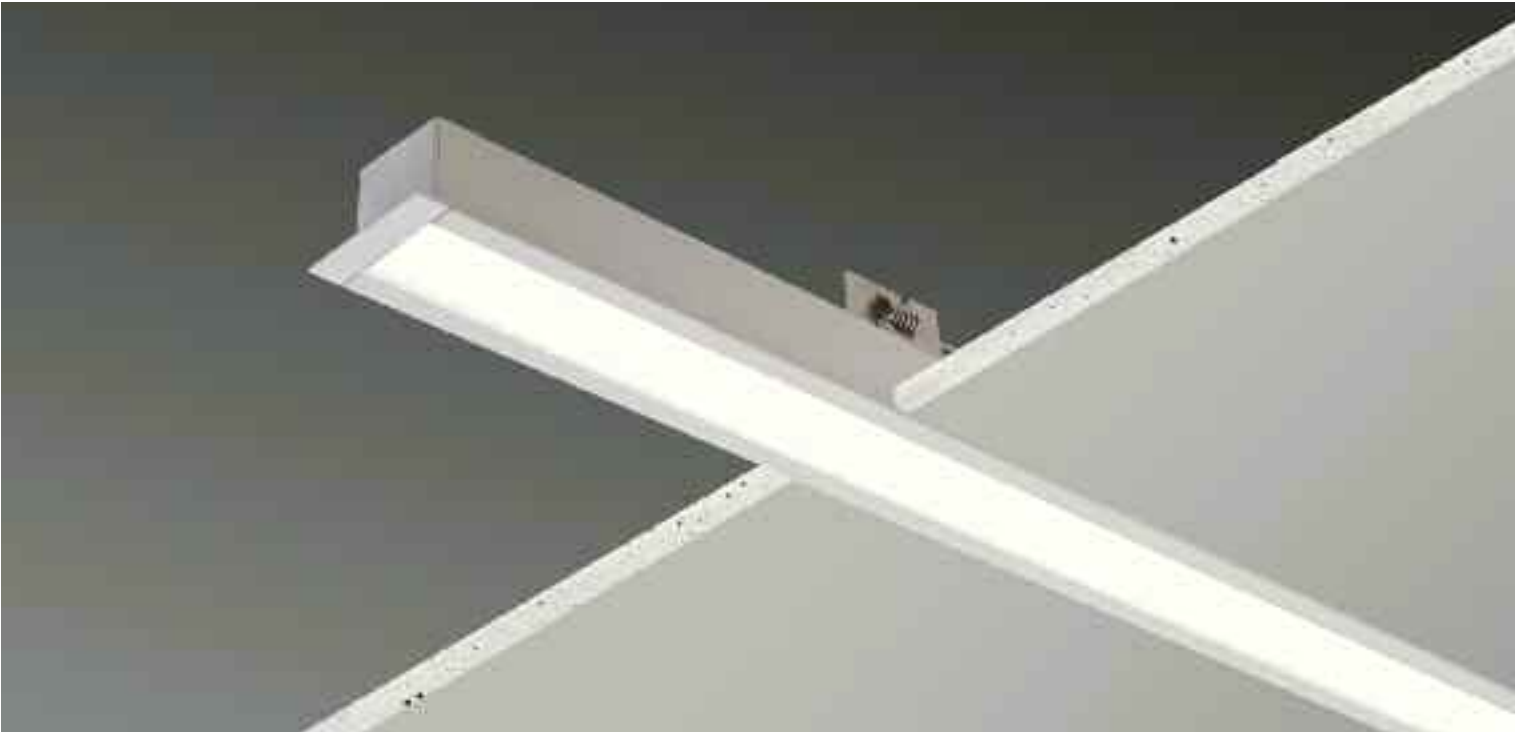


THITA Recessed LED PROFILE

'THITA' Recessed is a LED profile luminaire, made of an extruded aluminum, powder-coated with fine matte finish. Designed for recessed mounting with 8mm frame, providing direct light emission through PMMA diffuser. Luminaire equipped with the latest generation of well known LED boards, with small color tolerance MacAdam 3, according to Zhaga book 7. Drivers ON-OFF or dimmable.

Features:

- Available from 58cm to 228cm
- In two different Lumen output types plus tunable white version
- CRI 80 and optionally 90
- CCT 3000K and 4000K. Optionally 2700K and 6500K
- On-off or dimmable version (Dali, 0-10V, Push Button and Bluetooth)
- Coming in white and black powder coated
- 5years warranty
- L80 B50 @50.000h (Ta 24°)
- Color consistency <3SDCM
- Seamless and continuous light




Led Code: **THR** ◀ ▶ ☉ ▲ ■ ◆ ♀

Fill in your code using the following items from the table

◀ ▶	☉	▲	■	◆	♀
Length	Inset	CRI	CCT	Driver	Body Colour
058 = 058mm 170 = 170mm	1 = HE 2700Lm/mtr-150Lm/W	8 = 80	11 = TW	O = On/Off	W = White
086 = 086mm 198 = 198mm	2 = HO 4500Lm/mtr-144Lm/W	9 = 90	27 = 2700	D = Dali	B = Black
114 = 114mm 226 = 226mm	4 = TW 4800Lm/mtr-100Lm/W		30 = 3000K	V = 0-10V	
142 = 142mm			40 = 4000K	P = Push	
			65 = 6500K	B = Bluetooth	



THITA Trimless

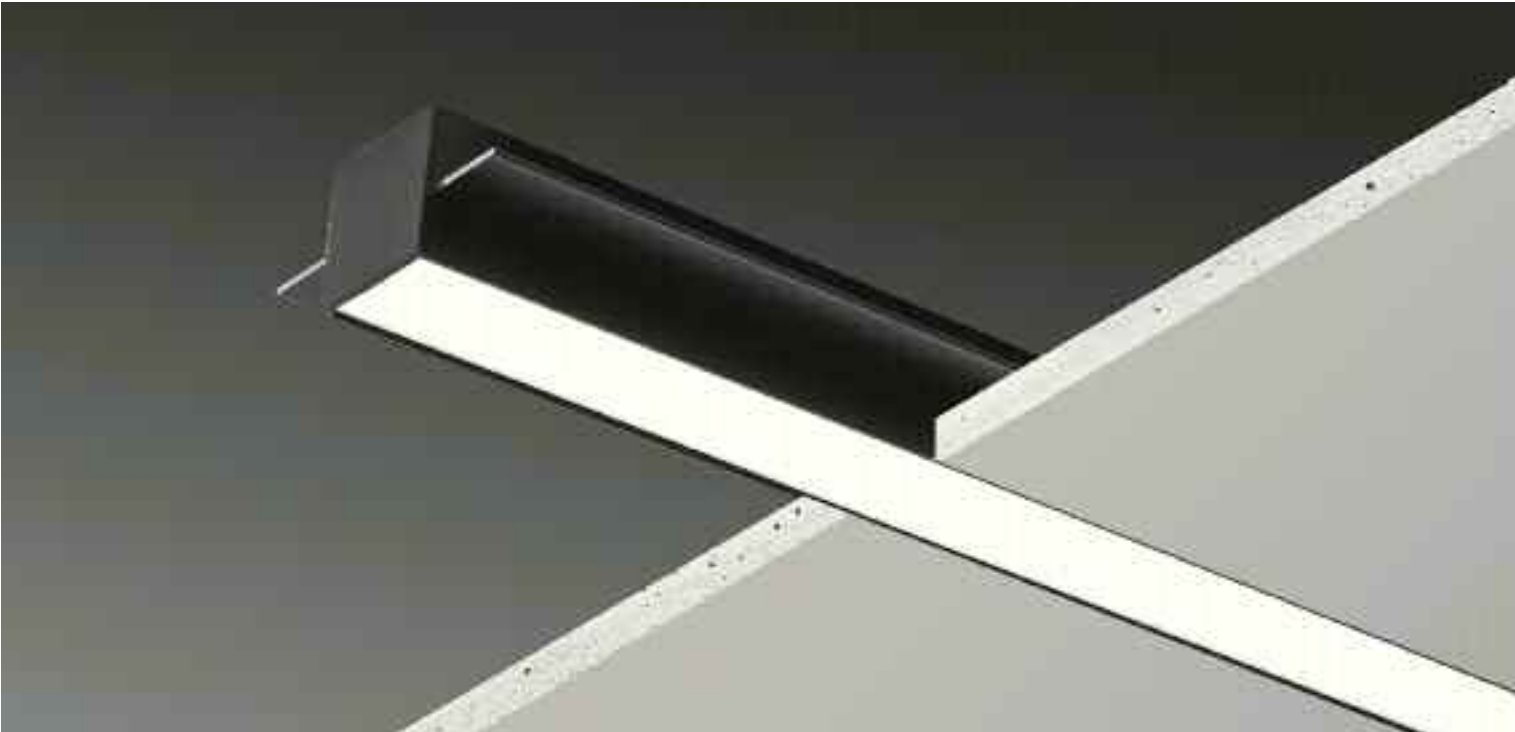


THITA Trimless LED PROFILE

'THITA' Trimless is a LED profile luminaire, made of an extruded aluminum, powder-coated with fine matte finish. Designed for recessed mounting without frame, providing direct light emission through PMMA diffuser. Luminaire equipped with the latest generation of well known LED boards, with small color tolerance MacAdam 3, according to Zhaga book 7. Drivers ON-OFF or dimmable.

Features:

- Available from 58cm to 228cm
- In two different Lumen output types plus tunable white version
- CRI 80 and optionally 90
- CCT 3000K and 4000K. Optionally 2700K and 6500K
- On-off or dimmable version (Dali, 0-10V, Push Button and Bluetooth)
- Coming in white and black powder coated
- 5years warranty
- L80 B50 @50.000h (Ta 24°)
- Color consistency <3SDCM
- Seamless and continuous light

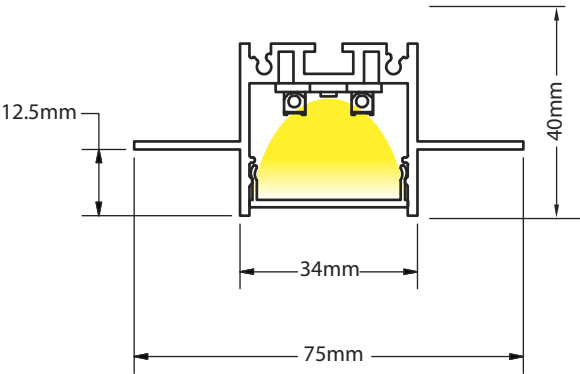


Led Code: **THT** ◀ ▶ ☉ ▲ ■ ◇ ♀

Fill in your code using the following items from the table

◀ ▶	☉	▲	■	◇	♀
Length	Inset	CRI	CCT	Driver	Body Colour
058 = 058mm 170 = 170mm	1 = HE 2700Lm/mtr-150Lm/W	8 = 80	11 = TW	0 = On/Off	W = White
086 = 086mm 198 = 198mm	2 = HO 4500Lm/mtr-144Lm/W	9 = 90	27 = 2700	D = Dali	B = Black
114 = 114mm 226 = 226mm	4 = TW 4800Lm/mtr-100Lm/W		30 = 3000K	V = 0-10V	
142 = 142mm			40 = 4000K	P = Push	
			65 = 6500K	B = Bluetooth	



ZITA Ceiling

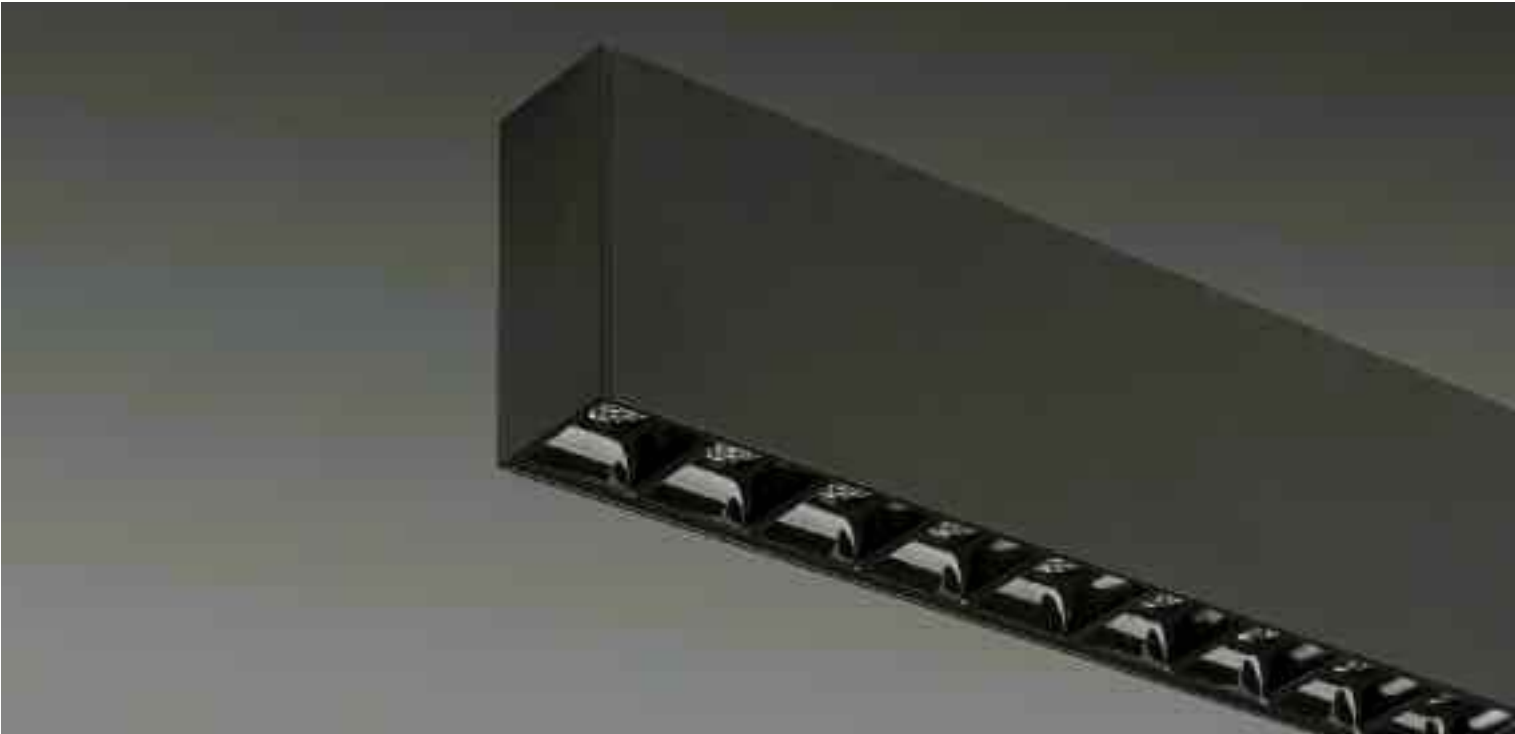


ZITA Ceiling LED PROFILE

'ZITA' Ceiling is a LED profile luminaire, made of an extruded aluminum, powder-coated with fine matte finish. Designed for ceiling mounting, providing direct light emission through SMD 5*2W, 1100Lm each. Luminaire equipped with the latest generation of well known LED boards, with small color tolerance MacAdam 3. Drivers ON-OFF or dimmable.

Features:





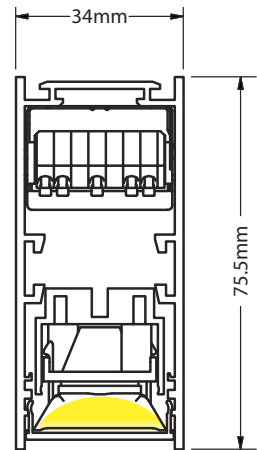

- Available from 13cm to 250cm
- With SMD 5*2W, 1100Lm each
- Available individual lenses 15°,30° and 45°
- CRI 80 and optionally 90
- CCT 3000K and 4000K. Optionally 2700K and 6500K
- On-off or dimmable version (Dali, 0-10V, Push Button and Bluetooth)
- Coming in white and black powder coated
- 5years warranty
- L80 B50 @50.000h (Ta 24°)
- Color consistency <3SDCM

Led Code: **ZC**      



Suspended Kit
Code: **THP**

Fill in your code using the following items from the table

					
Inset	CRI	CCT	Optic	Driver	Body Colour
1 = 133mm-1Led-10W-1100Lm	8 = 80	27 = 2700	N = 15°	O = On/Off	W = White
2 = 266mm-2Led-20W-2200Lm	9 = 90	30 = 3000K	R = 30°	D = Dali	B = Black
3 = 399mm-3Led-30W-3300Lm		40 = 4000K	W = 45°	V = 0-10V	
4 = 532mm-4Led-40W-4400Lm				P = Push	
				B = Bluetooth	



ZITA Recessed




ZITA Recessed LED PROFILE

'ZETA' Recessed is a LED profile luminaire, made of an extruded aluminum, powder-coated with fine matte finish. Designed for recessed mounting with 8mm frame, providing direct light emission through SMD 5*2W, 1100Lm each with individual lenses. Luminaire equipped with the latest generation of well known LED boards, with small color tolerance MacAdam 3. Drivers ON-OFF or dimmable.

Features:

- Available from 13cm to 250cm
- With SMD 5*2W, 1100Lm each
- Available individual lenses 15°,30° and 45°
- CRi 80 and optionally 90
- CCT 3000K and 4000K. Optionally 2700K and 6500K
- On-off or dimmable version (Dali, 0-10V, Push Button and Bluetooth)
- Coming in white and black powder coated
- 5years warranty
- L80 B50 @50.000h (Ta 24°)
- Color consistency <3SDCM

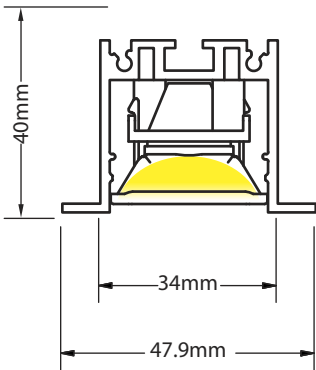


Led Code: **ZR**

Fill in your code using the following items from the table

Inset	CRi	CCT	Optic	Driver	Body Colour
1 = 133mm-1Led-10W-1100Lm	8 = 80	27 = 2700	N = 15°	O = On/Off	W = White
2 = 266mm-2Led-20W-2200Lm	9 = 90	30 = 3000K	R = 30°	D = Dali	B = Black
3 = 399mm-3Led-30W-3300Lm		40 = 4000K	W = 45°	V = 0-10V	
4 = 532mm-4Led-40W-4400Lm				P = Push	
				B = Bluetooth	



ZITA Trimless

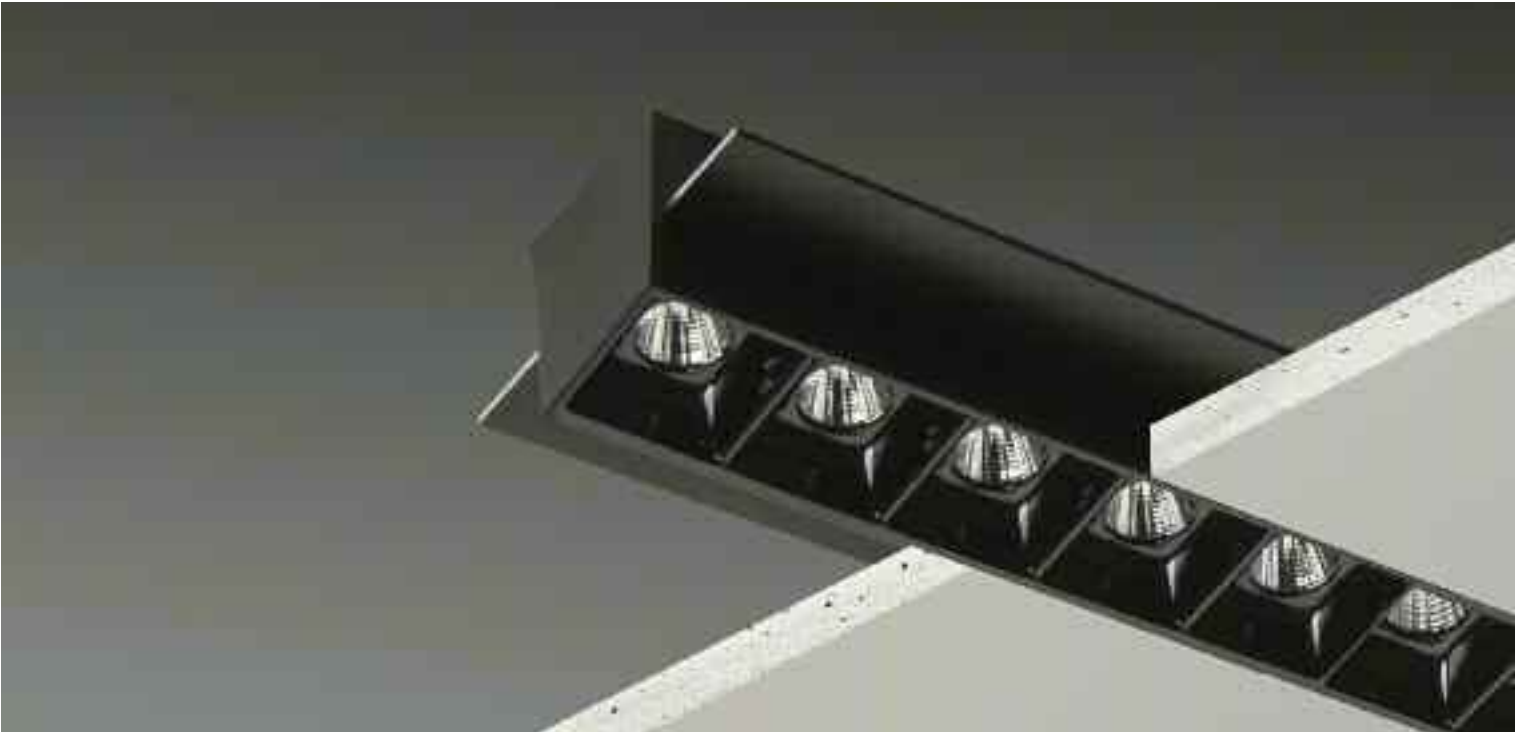


ZITA Trimless LED PROFILE

'ZETA' Trimless is a LED profile luminaire, made of an extruded aluminum, powder-coated with fine matte finish. Designed for recessed mounting without frame, providing direct light emission through SMD 5*2W, 1100Lm each. Luminaire equipped with the latest generation of well known LED boards, with small color tolerance MacAdam 3. Drivers ON-OFF or dimmable.





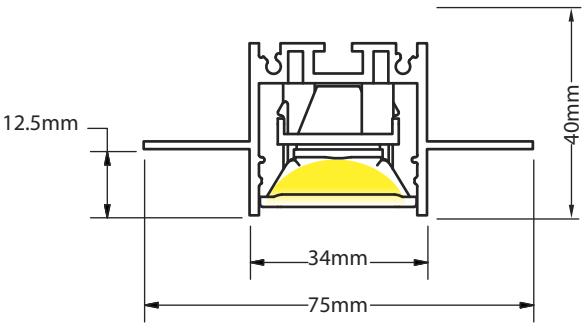

Features:

- Available from 13cm to 250cm
- With SMD 5*2W, 1100Lm each
- Available individual lenses 15°,30° and 45°
- CRI 80 and optionally 90
- CCT 3000K and 4000K. Optionally 2700K and 6500K
- On-off or dimmable version (Dali, 0-10V, Push Button and Bluetooth)
- Coming in white and black powder coated
- 5years warranty
- L80 B50 @50.000h (Ta 24°)
- Color consistency <3SDCM




Led Code: **ZT**      

Fill in your code using the following items from the table

					
Inset	CRI	CCT	Optic	Driver	Body Colour
1 = 133mm-1Led-10W-1100Lm	8 = 80	27 = 2700	N = 15°	O = On/Off	W = White
2 = 266mm-2Led-20W-2200Lm	9 = 90	30 = 3000K	R = 30°	D = Dali	B = Black
3 = 399mm-3Led-30W-3300Lm		40 = 4000K	W = 45°	V = 0-10V	
4 = 532mm-4Led-40W-4400Lm				P = Push	
				B = Bluetooth	




XI Ceiling

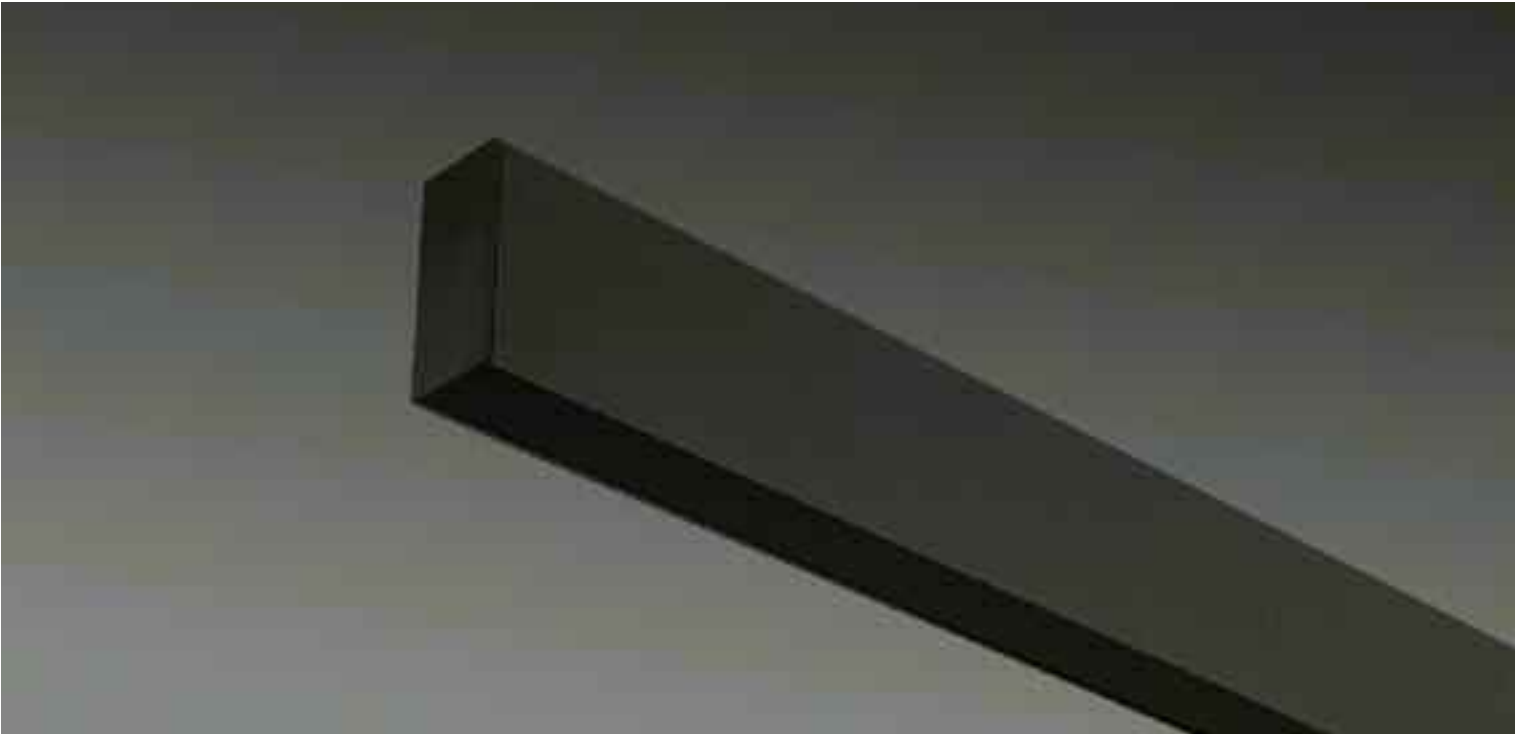

XI PROFILE

'XI' is a LED profile, made of an extruded aluminum, powder-coated with fine matte finish.
With flat cover. Designed for ceiling, recessed, and trimless installation.
Coming in white and black powder coated.
Available from 50cm to 250cm

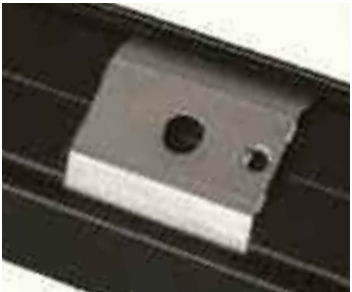

Suspended Kit
Code: THP


Led Code: X ◀▶ ⤴

Fill in your code using the following items from the table


<u>◀▶</u>	<u>⤴</u>
Length	Body Colour
0,5 = 05mm	W = White
1 = 10mm	B = Black
2 = 20mm	

XI


XI Ceiling

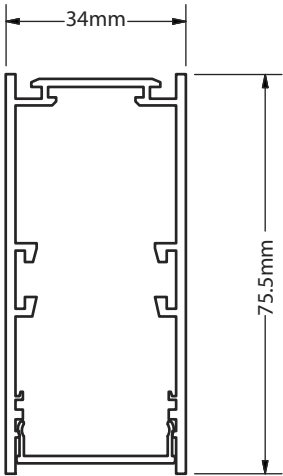


XI Pendant

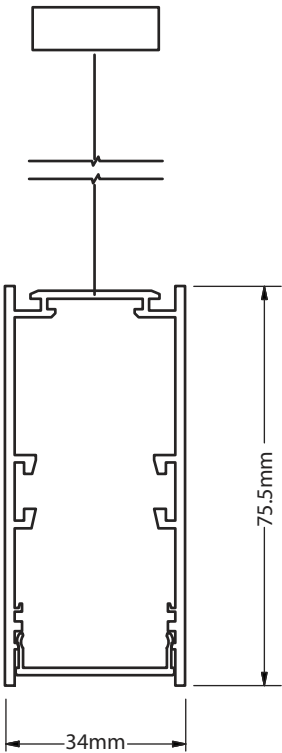

XI Recessed

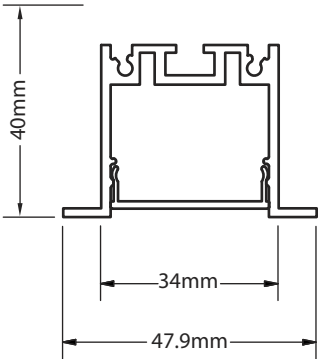

XI Trimless

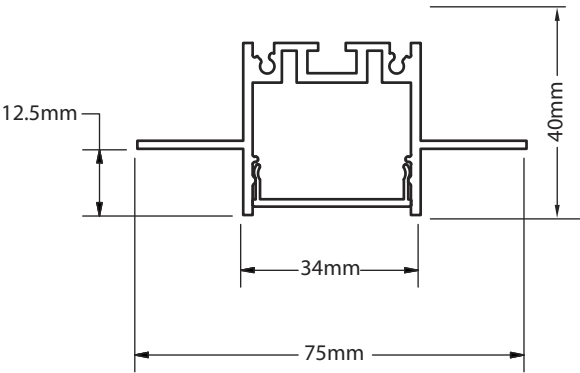




<_combine_
objects>_

JOINTS




<_combine_objects>_

Endless opportunities, create your own unique lighting system, by combining the instruments of previous pages and the joints below.
Till 4,5m the final fixture will be delivered undivided in 1piece.

Code		Symbol		Code		Symbol	
JL	Linear Joint	=		JL90	Left angle 90° Joint	<90	
JM	Movable Joint	^		JR90	Right angle 90° Joint	>90	
JL50	Left angle 50° Joint	<50		JL120	Left angle 120° Joint	<120	
JR50	Right angle 50° Joint	>50		JR120	Right angle 120° Joint	>120	
JU90°	Up Joint 90°	90°		JD90°	Down Joint 90°	90°	

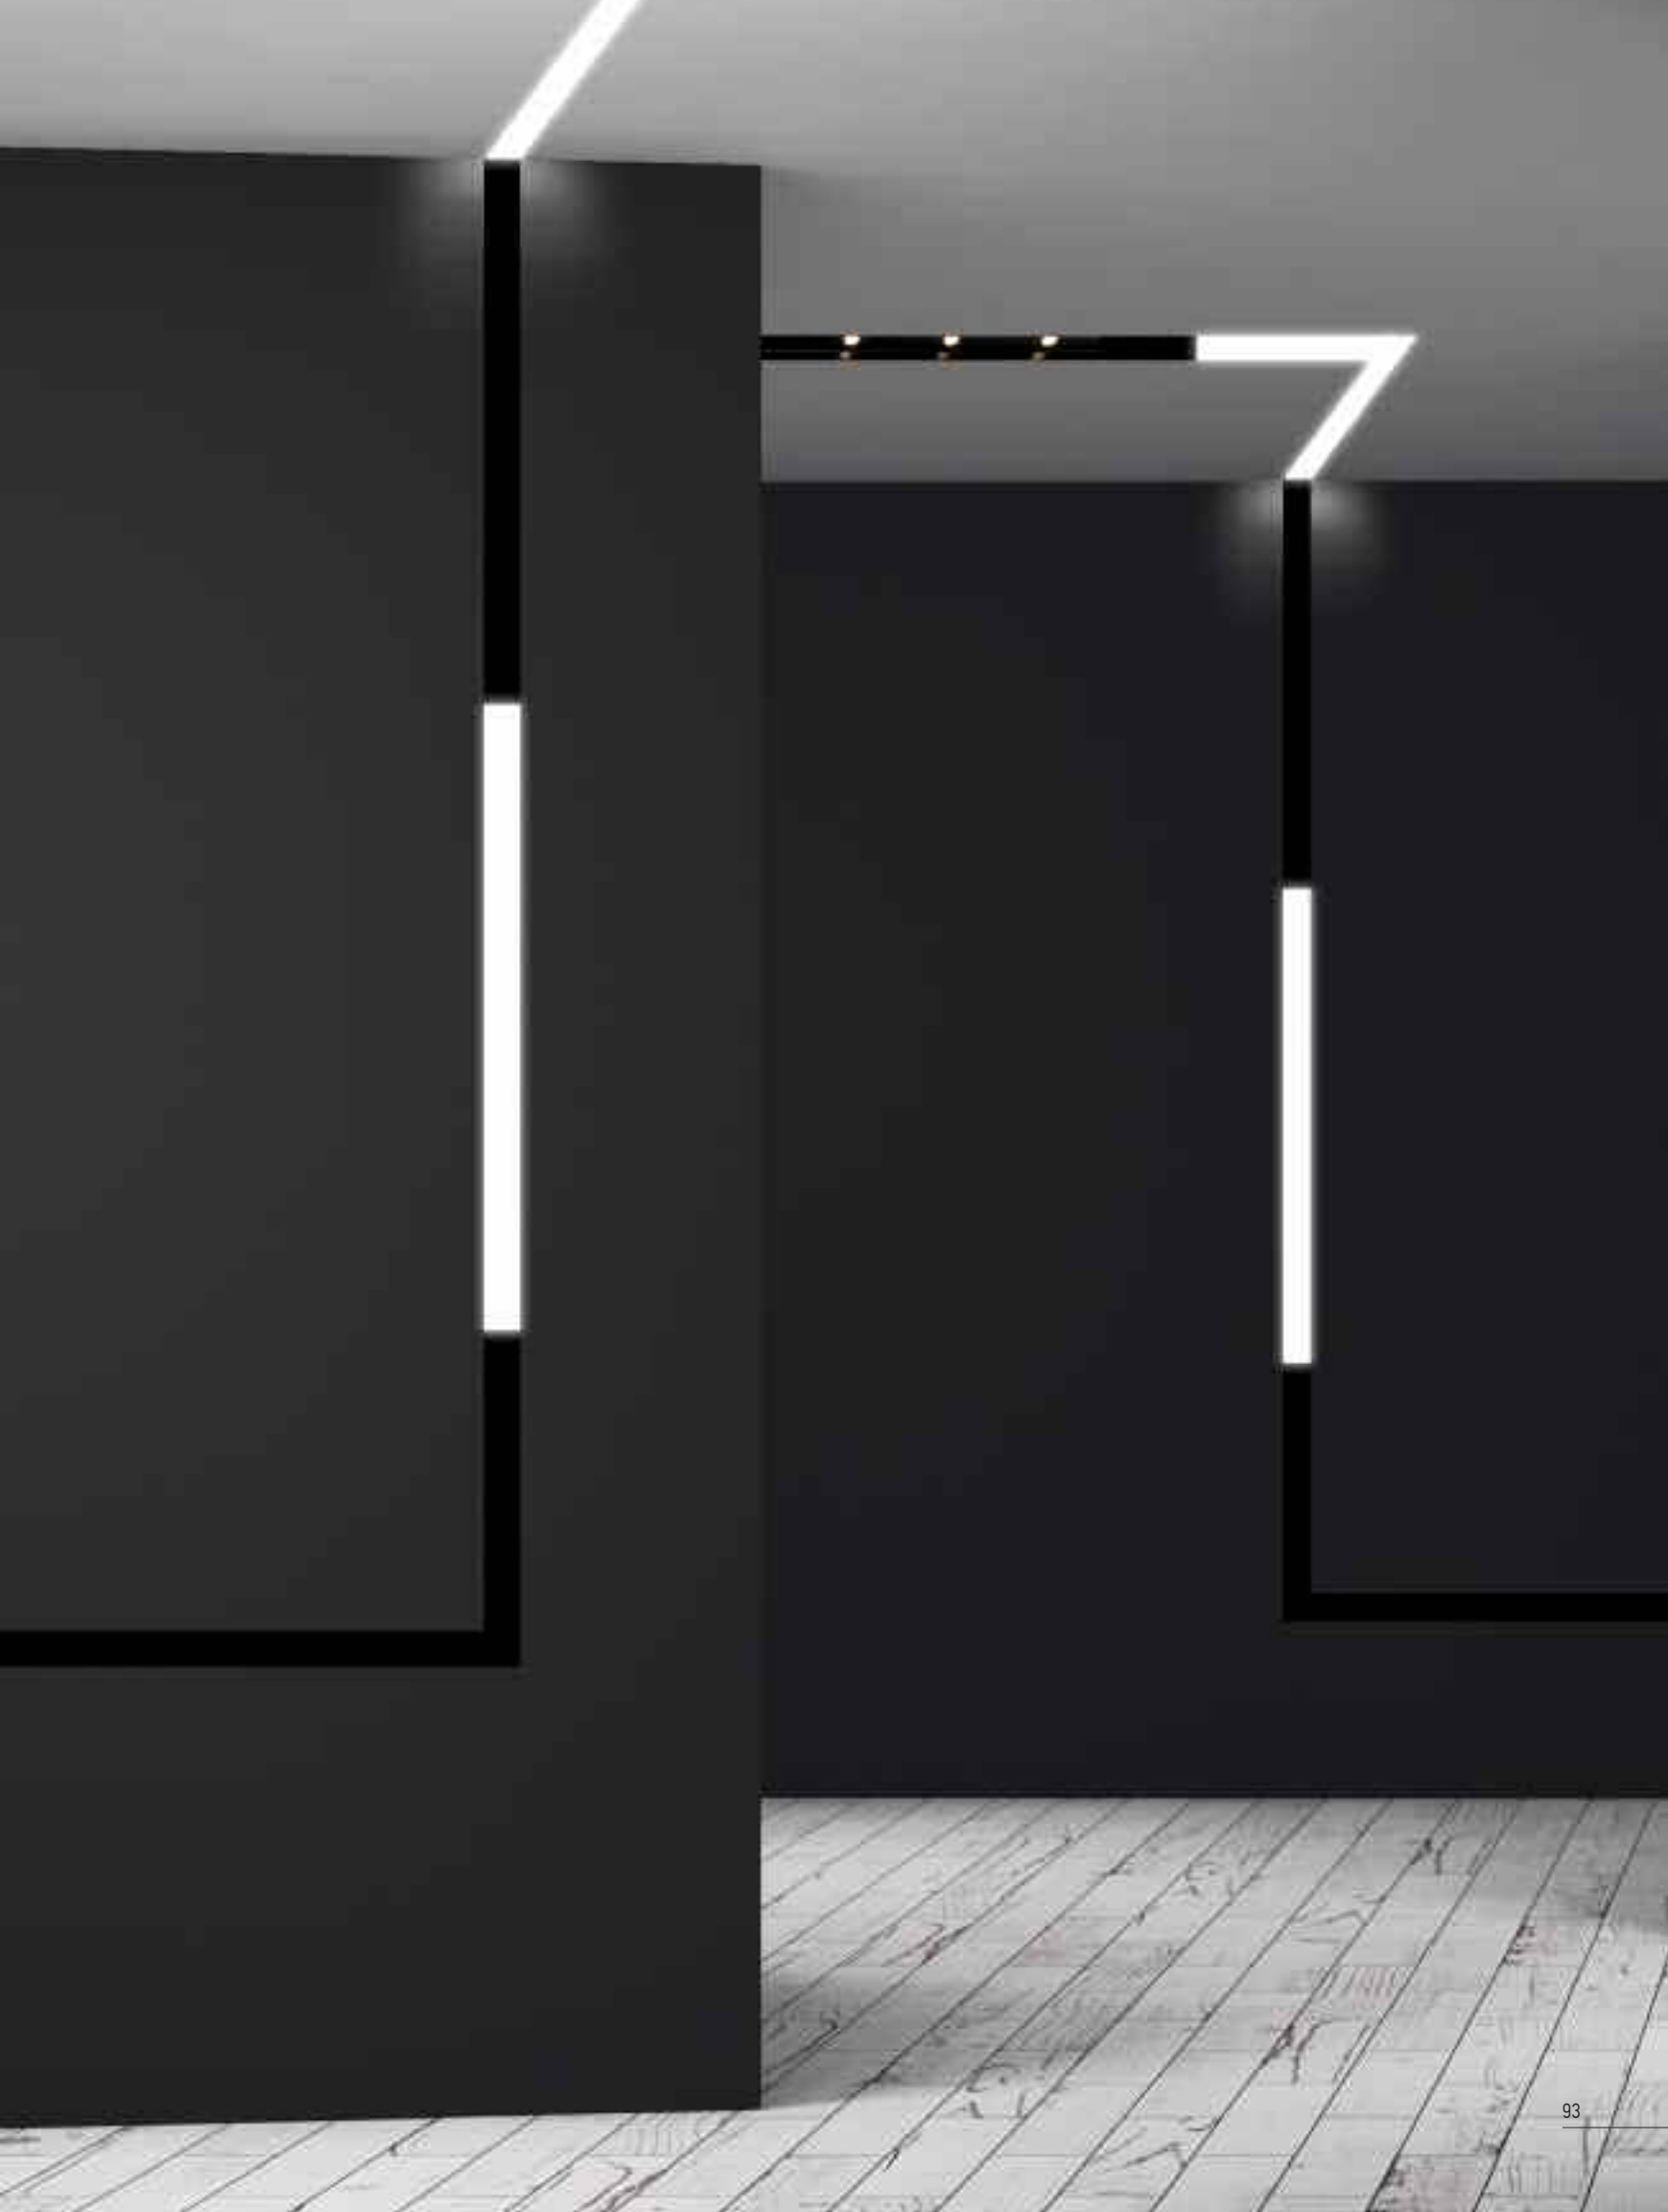

EXAMPLES OF APPLICATION

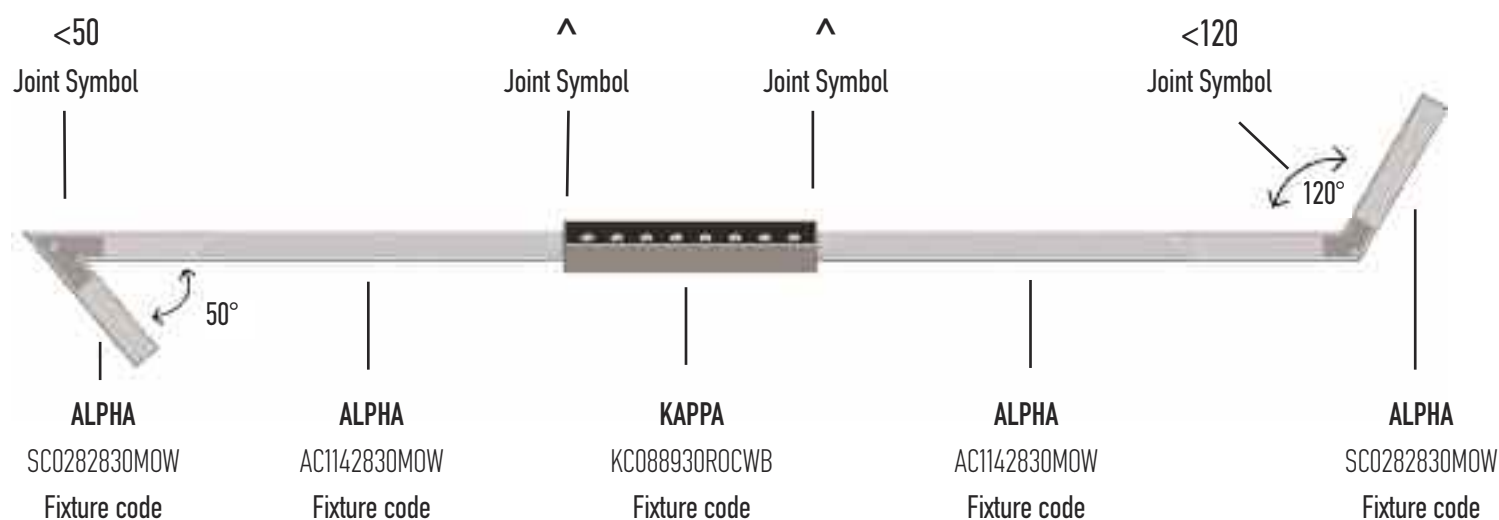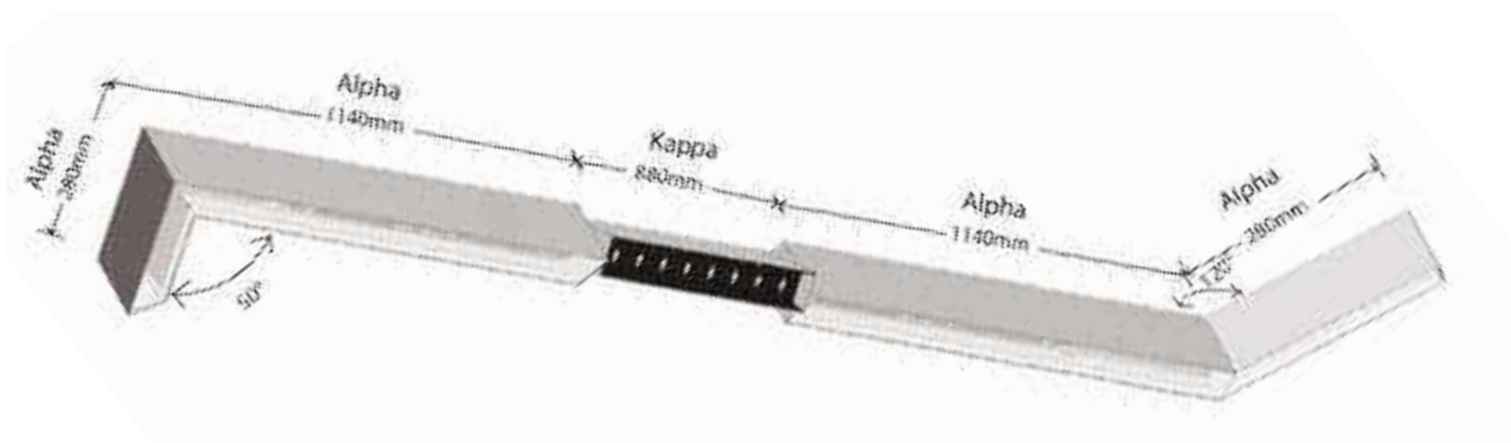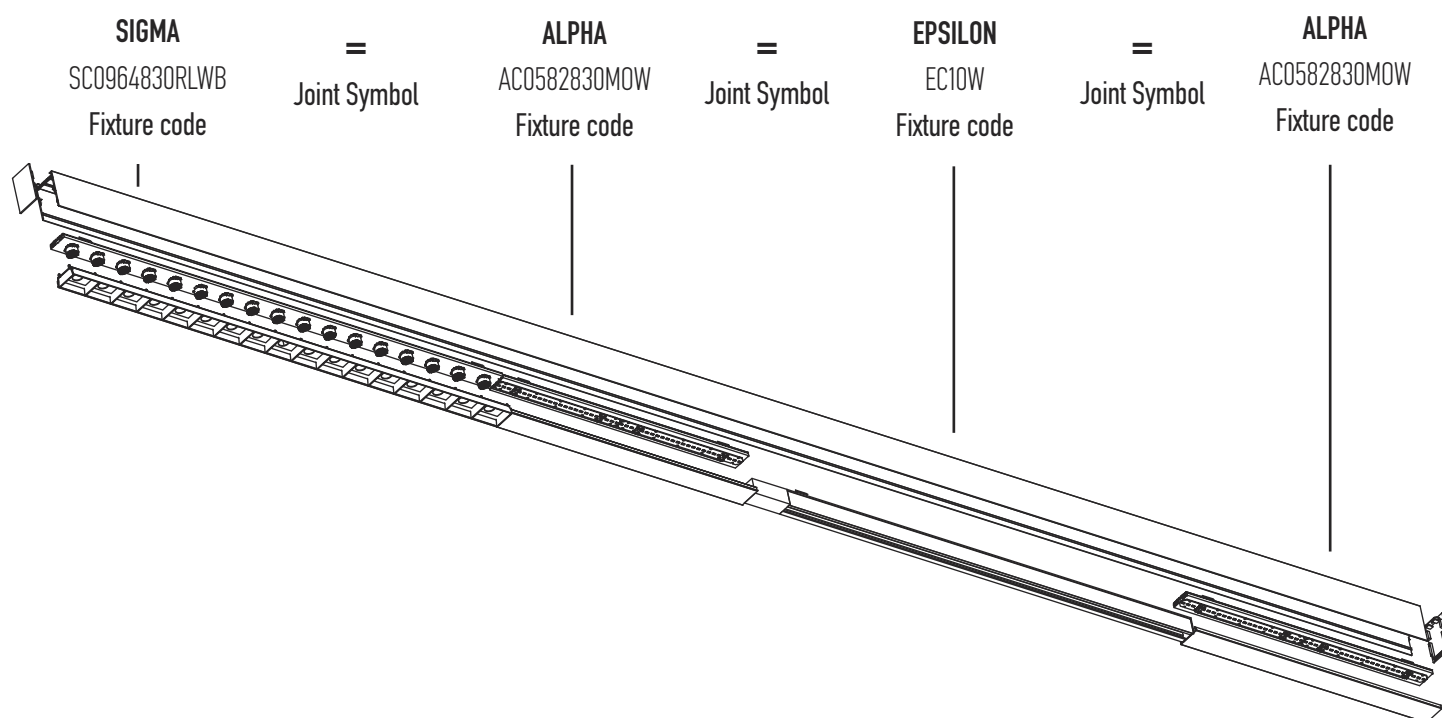






<_Curves_>

FI ALPHA

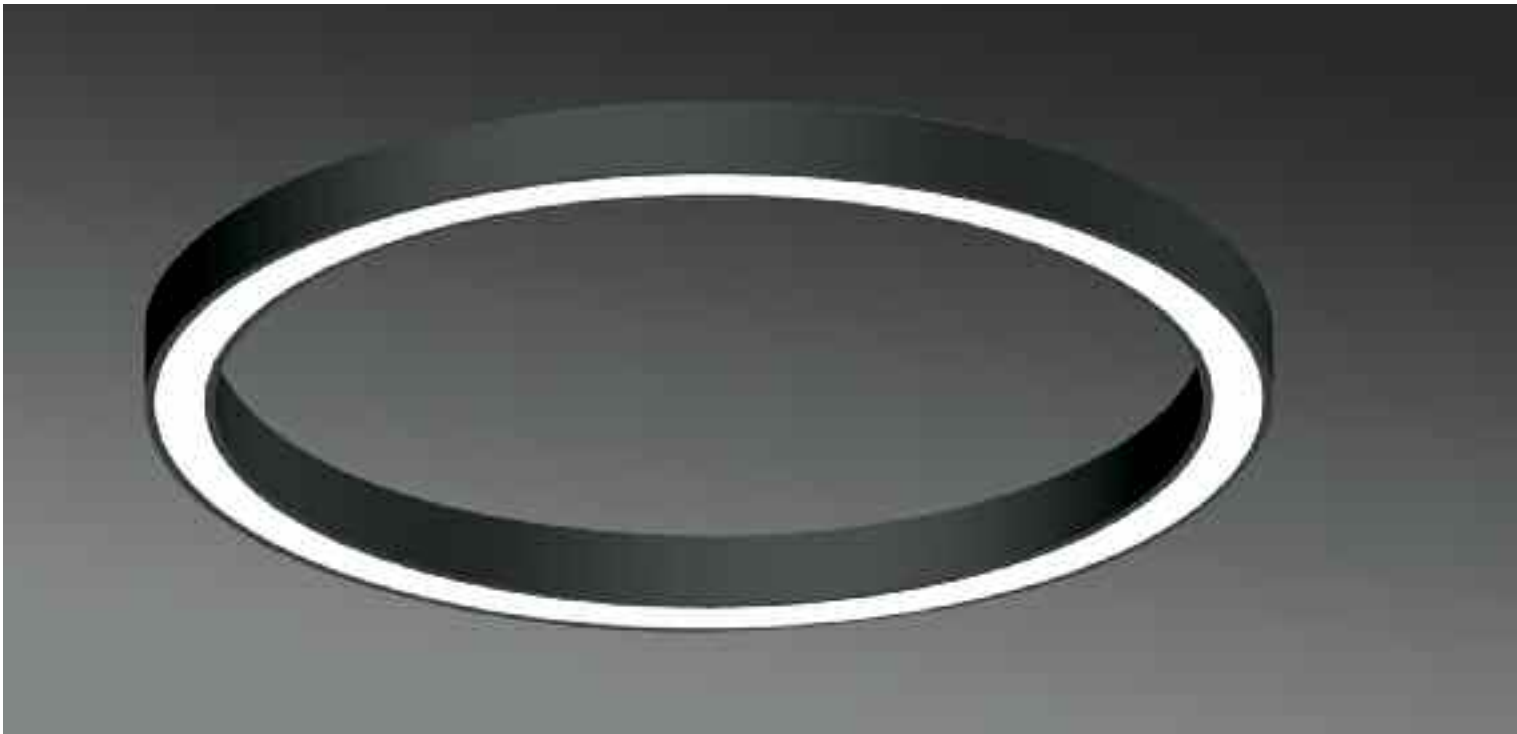


FI ALPHA LED PROFILE

'FI ALPHA' is a LED circle luminaire, made of an curved extruded aluminum, powder-coated with fine matte finish. Designed for pendant mounting, providing direct light emission through satined polycarbonate for an almost homogeneous emission of light. Luminaire equipped with the latest generation of well known LED boards, with small color tolerance MacAdam 3, according to Zhaga book 7. Drivers ON-OFF or dimmable.

Features:

- Available in diameters from 60cm to 180cm
- In two different Lumen output types plus tunable white version
- CRI 80 and optionally 90
- CCT 3000K and 4000K. Optionally 2700K and 6500K
- On-off or dimmable version (Dali, 0-10V, Push Button and Bluetooth)
- Coming in white, black and gray powder coated and in special decorative Old Steel and Old Copper.
- 5years warranty
- L80 B50 @50.000h (Ta 24°)
- Color consistency <3SDCM

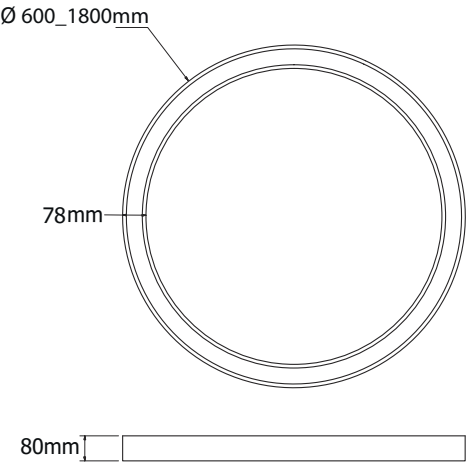

Led Code: **FA** ◀ ▶ ☉ ▲ ■ ◇ 👤

Fill in your code using the following items from the table

◀ ▶	☉	▲	■	◇	👤
Length	Inset	CRI	CCT	Driver	Body Colour
060 = 600mm	2 = H0-4500Lm/mtr 100Lm/W	8 = 80	11 = TW	O = On/Off	W = White
090 = 900mm	4 = TunableWhite-4800Lm/mtr 100Lm/W	9 = 90	27 = 2700	D = Dali	B = Black
120 = 1200mm			30 = 3000K	V = 0-10V	G = Grey
180 = 1800mm			40 = 4000K	P = Push	L = Black Oxidation
				B = Bluetooth	R = Red Oxidation



FI SIGMA




FI SIGMA LED PROFILE

'FI SIGMA' is a LED circle luminaire, made of a curved extruded aluminum, powder-coated with fine matte finish. Designed for pendant mounting, providing direct light emission through SMD 3W, 360Lm each with individual lenses. Luminaire equipped with the latest generation of well known LED boards, with small color tolerance MacAdam 3. Drivers ON-OFF or dimmable.

Features:

- Available in diameters from 60cm to 180cm
- In two different Lumen output types plus Tunable White version
- CRI 80 and optionally 90
- CCT 3000K and 4000K. Optionally 2700K and 6500K
- On-off or dimmable version (Dali, 0-10V, Push Button and Bluetooth)
- Coming in white, black and gray powder coated and in special decorative Old Steel and Old Copper.
- 5years warranty
- L80 B50 @50.000h (Ta 24°)
- Color consistency <3SDCM

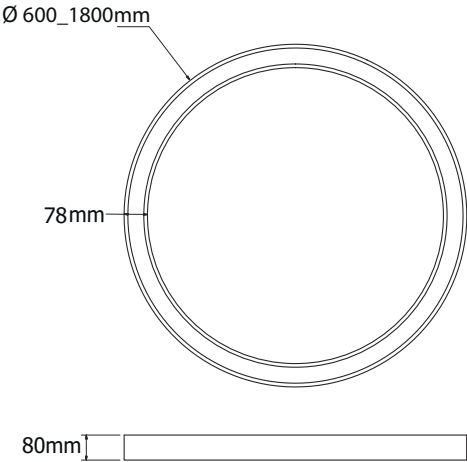

Led Code: **FS** ◀ ▶ ☉ ▲ ■ ◇ ⤴

Fill in your code using the following items from the table

◀ ▶	☉	▲	■	◇	⤴
Length	No of LED	CRI	CCT	Driver	Body Colour
060 = 600mm	8 = 600mm-8Led-24W-2880Lm	8 = 80	11 = TW	O = On/Off	W = White
090 = 900mm	12 = 900mm-12Led-36W-4320Lm	9 = 90	27 = 2700	D = Dali	B = Black
120 = 1200mm	16 = 1200mm-16Led-48W-5760Lm		30 = 3000K	V = 0-10V	G = Grey
180 = 1800mm	20 = 600mm-20Led-60W-7200Lm		40 = 4000K	P = Push	L = Black Oxidation
				B = Bluetooth	R = Red Oxidation



ALPHABET



ALPHABET
ALPHABET
ALPHABET

ALPHABET
ALPHABET



<_Track Lights_>

Delta Track Light



Delta TRACK LIGHT

Features:


- 3phase Track Spotlight
 - 25-30-40W
 - up to 5280Lm
 - up to 149Lm/W
 - Lifetime up to 100.000h
 - Ripple <1%
 - 2 MacAdam step
 - Input Voltage: AC 220-240V
 - Power Factor: 0.95
 - CCT:3000K or 4000K
 - CRI: 85 & 95 optionally
 - Color tolerance: 2 MacAdam
 - THD<20%
 - Electronic short-circuit protection
 - Overload protection
- Overtemperature protection
 - Protection against "no load" operation
 - Operation temperature: -25° +45°
 - Operation lifetime 100.000h
 - 5 years warranty
 - L90B10 @ 50.000h
 - L80B10 @ 100.000h
 - Ambient temperature +24°




Honeycomb
Code: **DH**



Elliptical
Code: **DE**



Flood
Code: **DF**

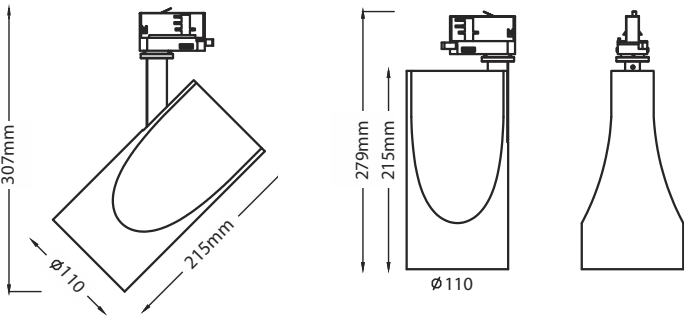

TRACK Light Code: **D** **W** **▲** **■** **●** **Ⓐ**

Fill in your code using the following items from the table

W	▲	■	●	Ⓐ
Wattage	CRI	CCT	Optic	Body Colour
25 = 25W	8 = 85	30 = 3000K	N = 15°	W = White
30 = 30W	9 = 95		M = 24°	B = Black
40 = 40W			R = 36°	
		40 = 4000K		
		25W - 3600Lm/144Lm/W		
		30W - 4200Lm/140Lm/W		
		40W - 5120Lm/128Lm/W		
		25W - 3720Lm/149Lm/W		
		30W - 4350Lm/145Lm/W		
		40W - 5280Lm/132Lm/W		



Ypsilon Track Light



Ypsilon TRACK LIGHT

Features:

- 3phase Track Spotlight
- 12-18W
- up to 2916Lm
- up to 165Lm/W
- Lifetime up to 50.000h
- 2 MacAdam step
- Input Voltage: AC 220-240V
- Power Factor: 0.95
- CCT:3000K or 4000K
- CRI: 85 & 95 optionally
- Color tolerance: 2 MacAdam
- THD<20%
- Electronic short-circuit protection
- Overload protection
- Overtemperature protection

- Protection against "no load" operation
- Operation temperature: -25° +45°
- Operation lifetime 50.000h
- 5 years warranty
- L90B10 @ 50.000h
- Ambient temperature +24°






Honeycomb
Code: YH



Elliptical
Code: YE



Flood
Code: YF



TRACK Light Code: Y W ▲ ■ ● Ⓐ

Fill in your code using the following items from the table

<u>W</u>	<u>▲</u>	<u>■</u>	<u>●</u>	<u>Ⓐ</u>
Wattage	CRI	CCT	Optic	Body Colour
12 = 12W	8 = 85	30 = 3000K 12W - 1920Lm/160Lm/W 18W - 2844Lm/158Lm/W	N = 15°	W = White
18 = 18W	9 = 95	40 = 4000K 12W - 1980Lm/165Lm/W 18W - 2916Lm/162Lm/W	M = 24° R = 36°	B = Black



Omega Track Light



Omega TRACK LIGHT

Features:

- 3phase Track Spotlight
 - 25-30-40W
 - up to 5280Lm
 - up to 149Lm/W
 - Lifetime up to 100.000h
 - Ripple <1%
 - 2 MacAdam step
 - Input Voltage: AC 220-240V
 - Power Factor: 0.95
 - CCT:3000K or 4000K
 - CRi: 85 & 95 optionally
 - Color tolerance: 2 MacAdam
 - THD<20%
 - Electronic short-circuit protection
 - Overload protection
- Overtemperature protection
 - Protection against "no load" operation
 - Operation temperature: -25° +45°
 - Operation lifetime 100.000h
 - 5 years warranty
 - L90B10 @ 50.000h
 - L80B10 @ 100.000h
 - Ambient temperature +24°





Honeycomb
Code: WH



Elliptical
Code: WE





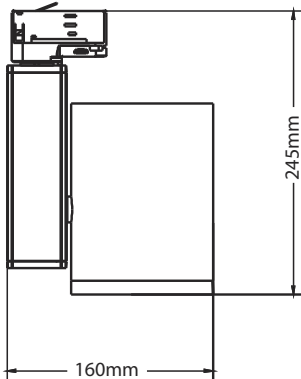



Flood
Code: WF



TRACK Light Code: W W ▲ ■ ● ◇ Ⓐ

Fill in your code using the following items from the table

					
Wattage	CRi	CCT	Optic	Driver	Body Colour
25 = 25W	8 = 85	30 = 3000K	N = 15°	O = On/Off	W = White
30 = 30W	9 = 95	25W - 3600Lm/144Lm/W 30W - 4200Lm/140Lm/W 40W - 5120Lm/128Lm/W	M = 24°	D = Dali	B = Black
40 = 40W		40 = 4000K	R = 36°	V = 0-10V	
		25W - 3720Lm/149Lm/W 30W - 4350Lm/145Lm/W 40W - 5280Lm/132Lm/W		P = Push	
				B = Bluetooth	




Giota Track Light



Giota TRACK LIGHT

Features:

- 3phase Track Spotlight
 - 10-15W
 - up to 2475Lm
 - up to 173Lm/W
 - Lifetime up to 50.000h
 - 2 MacAdam step
 - Input Voltage: AC 220-240V
 - Power Factor: 0.9
 - CCT:3000K or 4000K
 - CRI: 85 & 95 optionally
 - Color tolerance: 2 MacAdam
 - THD<20%
 - Electronic short-circuit protection
 - Overload protection
 - Overtemperature protection
- Protection against "no load" operation
 - Operation temperature: -25°+45°
 - Operation lifetime 50.000h
 - 5 years warranty
 - L90B10 @ 50.000h
 - Ambient temperature +24°

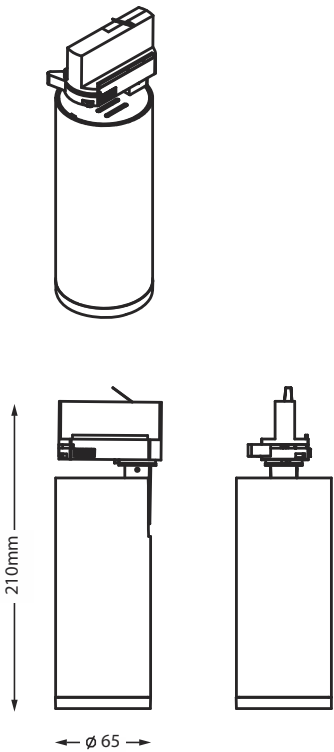



TRACK Light Code: I W ▲ ■ ● Ⓐ

Fill in your code using the following items from the table

<u>W</u>	<u>▲</u>	<u>■</u>	<u>●</u>	<u>Ⓐ</u>
Wattage	CRI	CCT	Optic	Body Colour
10 = 10W	8 = 85	30 = 3000K	10W - 1680Lm/168Lm/W	W = White
15 = 15W	9 = 95	15W - 2400Lm/160Lm/W	15W - 2400Lm/160Lm/W	B = Black
		40 = 4000K	10W - 1730Lm/173Lm/W	
			15W - 2475Lm/165Lm/W	
			N = 15°	
			M = 24°	
			R = 36°	





3 Circuit Lighting Track




Code: **TRC**  

3 circuit lighting track surface mounted




Code: **TRR**  

3 circuit lighting track recessed



Code: **TRF**   





Feeder for 3 circuit lighting track




Code: **TRL**  

Live connector for 3 circuit lighting track


Fill in your code using the following items from the table

			
Length	Mounting	Direction	Body Colour
1 = 100mm	C = Ceiling	L = Left	W = White
2 = 200mm	R = Recessed	R = Right	B = Black
3 = 300mm			G = Grey




Code: **TRI** 

Inner connector for 3 circuit lighting track




Code: **TRG**   

Corner connector for 3 circuit lighting track



Code: **TRF** 

Flexible connector for 3 circuit lighting track



Code: **TRT**  

'TAF' shape connector for 3 circuit lighting track



Code: **TRE** 

End cup for 3 circuit lighting track



Suspended Kit

Code: **TRS**



Code: **TRB** 

Ceiling base for 3 circuit lighting track

Omicron Recessed Downlight



Omicron Recessed Downlight

Features:

- Recessed Downlight
- 18-25-30W
- up to 5280Lm
- up to 149Lm/W
- Lifetime up to 100.000h
- Ripple <1%
- 2 MacAdam step
- Input Voltage: AC 220-240V
- Power Factor: 0.95
- CCT:3000K or 4000K
- CRI: 85 & 95 optionally
- Color tolerance: 2 MacAdam
- THD<20%
- Electronic short-circuit protection
- Overload protection
- Overtemperature protection
- Protection against "no load" operation
- Operation temperature: -25° +45°
- Operation lifetime 100.000h
- 5 years warranty
- L90B10 @ 50.000h
- L80B10 @ 100.000h
- Ambient temperature +24°




Honeycomb
Code: OH



Elliptical
Code: OE



Flood
Code: OF

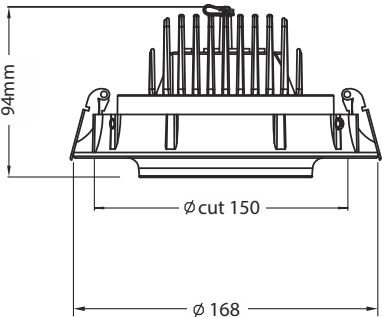


TRACK Light Code: 0 W ▲ ■ ● ◇ Ⓐ

Fill in your code using the following items from the table

<u>W</u>	<u>▲</u>	<u>■</u>	<u>●</u>	<u>◇</u>	<u>Ⓐ</u>
Wattage	CRI	CCT	Optic	Driver	Body Colour
18 = 18W	8 = 80	30 = 3000K	N = 15°	O = On/Off	W = White
25 = 25W	9 = 90	18W - 2844Lm/158Lm/W	M = 24°	D = Dali	
30 = 30W		25W - 3600Lm/144Lm/W	R = 36°	V = 0-10V	
		30W - 4200Lm/140Lm/W		P = Push	
		40 = 4000K		B = Bluetooth	
		18W - 2916Lm/162Lm/W			
		25W - 3720Lm/149Lm/W			
		30W - 4350Lm/145Lm/W			




Omicron Recessed Downlight

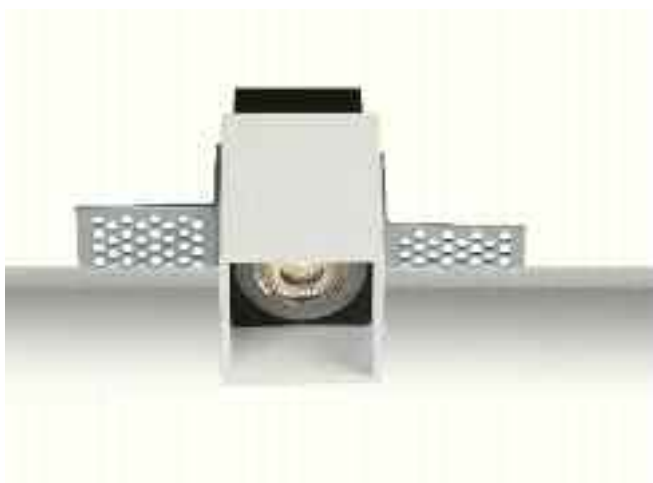

TRACK Light Code: **0T**




- Trimless Fixed COB 7W LED Downlight
- 630Lm / CCT: 2700K
- 800Lm / CCT: 3000K
- Beam Angle: 24
- Recommended driver V350 for 1 fixture




TRACK Light Code: **0S**




- Trimless Fixed COB 5W LED Downlight
- 450Lm / CCT: 2700K
- 580Lm / CCT: 3000K
- Beam Angle: 25
- Recommended driver V500 for 1-3 fixtures, series connection



TRACK Light Code: **0A**



- Fixed 5W COB LED Downlight
- 450Lm / CCT: 2700K
- 580Lm / CCT: 3000K
- Beam Angle: 25
- Recommended driver V500 for 1-3 fixtures, series connection

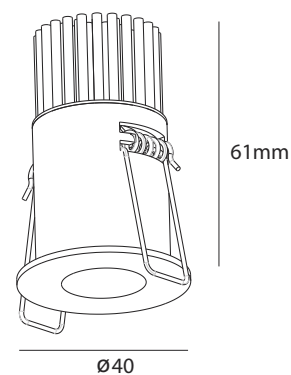




TRACK Light Code: 0D




- Adjustable 5W COB LED Downlight
- 580Lm
- CCT: 3000K
- Beam Angle: 25
- Recommended driver V500 for 1-3 fixtures, series connection

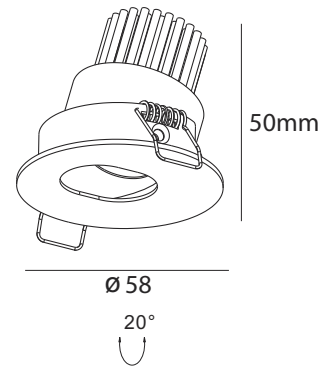

TRACK Light Code: 0Z




- Fixed 7W COB Led Downlight
- 630Lm / CCT: 2700K
- 800Lm / CCT: 3000K
- Dim to Warm
- Beam Angle: 24
- Recommended driver V350 for 1 fixture



TRACK Light Code: 0K



- Adjustable 7W COB LED Downlight
- 630Ln / 800Ln
- CCT: 2700K / 3000K
- Dim to Warm
- Beam Angle: 15
- Recommended driver V350 for 1 fixture

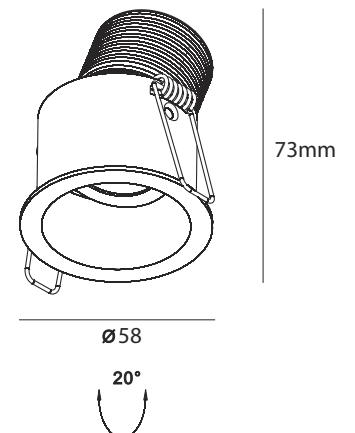


Giota Recessed Downlight



TRACK Light Code: **IF**




- Adjustable 7W COB LED Downlight
- 800Lm
- CCT: 3000K
- Beam Angle: 36°
- Recommended driver V350 for 1 fixture

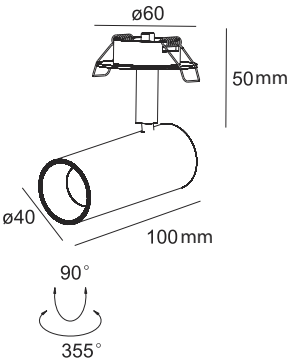

TRACK Light Code: **IK**




- Adjustable 4.5W COB LED Downlight
- 600Lm
- CCT: 3000K
- Beam Angle: 36°
- Dim to Warm
- Recommended driver V250 for 1-3 fixtures, series connection



TRACK Light Code: **IL**



- Adjustable 7W COB LED Downlight
- 800Lm
- CCT: 3000K
- Beam Angle: 36°
- Dim to Warm
- Recommended driver V350 for 1 fixture

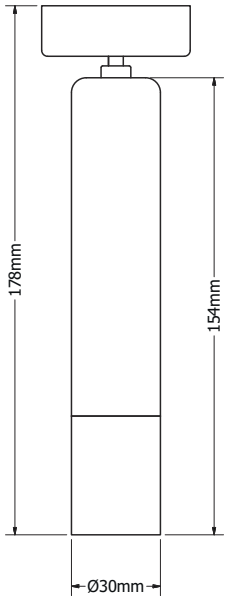


Driver for Recessed Downlight



CODE	mA	Watt	V
V350	350	11	2-32
V500	500	16	2-32
V700	700	17	2-25

Constant Current LED driver


- Mains voltage: 220-240 V ±10%
- Mains frequency: 50-60 Hz
- DC operation: 176-264 V DC, 0 Hz
- Electronic short-circuit protection
- Overload protectionProtection against "no load" operation
- Degree of protection: IP20
- Protection class II SELV
- Product guarantee: 5 years




Omicron Waterproof



TRACK Light Code: **0E**



- Fixed 2W Led Downlight
- 100Lm
- CCT: 3000K
- Beam Angle: 12/24/36
- Recommended driver V350 for 1-8 fixtures, series connection




Omicron Waterproof



TRACK Light Code: **01**




- Fixed 1W COB Led Step Light
- 80Lm
- CCT: 3000K
- Beam Angle: N/A
- Recommended driver V350 for 1-8 fixtures, series connection



TRACK Light Code: **0P**




- Fixed 2W COB Led Step Light
- 150Lm
- CCT: 3000K
- Beam Angle: N/A
- Recommended driver V350 for 1-8 fixtures, series connection







TRACK Light Code: **0Y**




- Fixed 2W Led Step Light
- 150Lm
- CCT: 3000K
- Beam Angle: N/A
- Recommended driver V350 for 1-8 fixtures, series connection





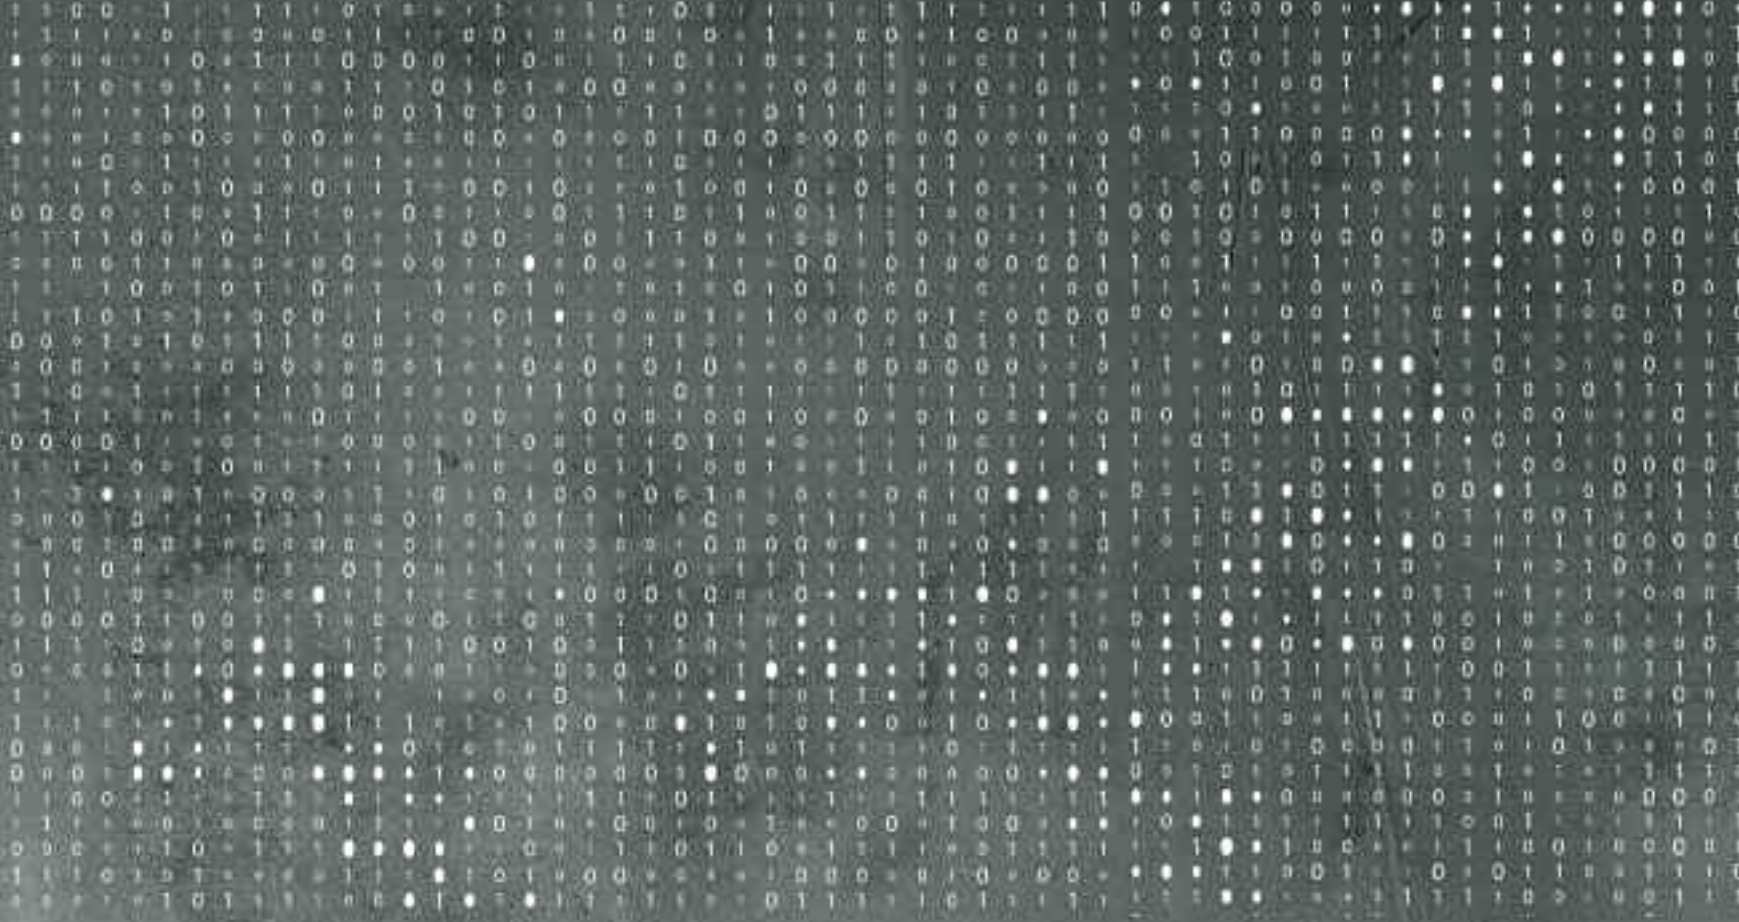

Change... the way you see

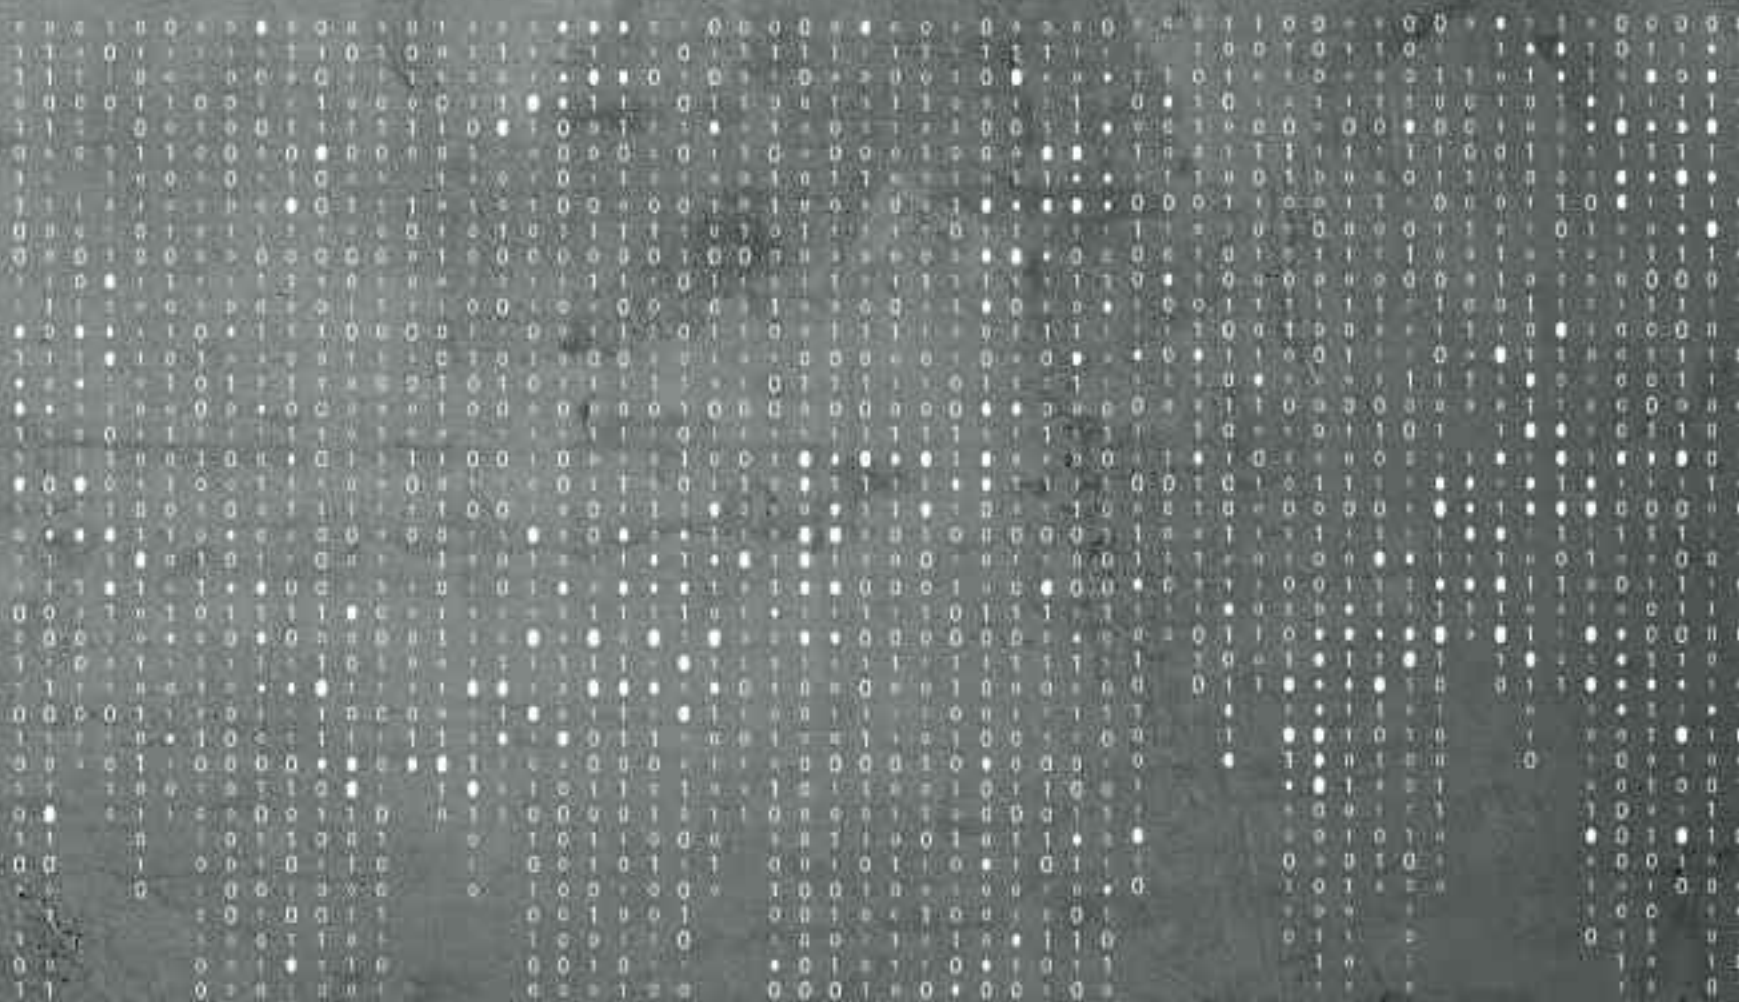



ALPHABET

</scripting_light>

Headquarter
📍 Megali Ayli, Keratea 19001
Athens Greece

☎ +30 229 906 3519 -20
✉ info@zambelislights.gr
✉ info@alphabetlights.com

🌐 zambelislights.com
🌐 alphabetlights.com